


LED surface mounted downlight, IP54
Artikel-Nr. 12076173

Licht.
Für Generationen.

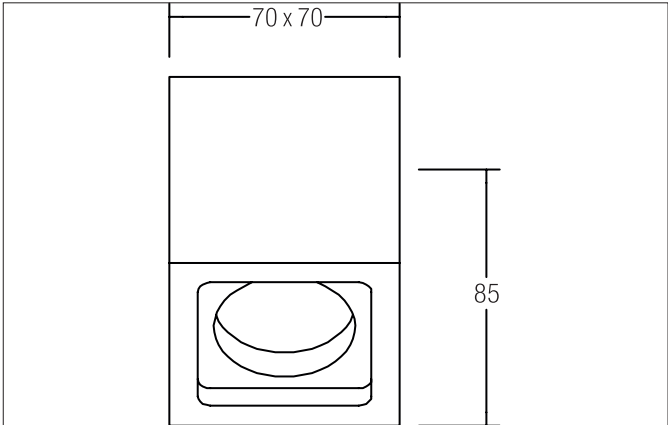

Tender
LED surface mounted downlight, IP54, white, square. Surface mounting, Ceiling-mounted Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP54, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 7W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 450lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 30°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Article data	
Artikel-Nr.	12076173
GTIN	4250047781400
Kurzbeschreibung	LED surface mounted downlight, IP54
Material	Aluminium / Glass
Colour	White
Type of surface	Glossy
Shape	square
Length	70 mm
Width	70 mm
Aufbauhöhe	85 mm
scope of delivery	Incl. converter for connection to the 230-V mains voltage
weight	0.702 kg

LED surface mounted downlight, IP54

Artikel-Nr. 12076173

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	450 lm
System efficiency	64 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	30 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	7 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP54
Control	on/off
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Material cover	Glass transparent

Packing data	
Gross weight	0.769 kg
Length of packaging	90 mm
Packaging width	90 mm
Packaging height	100 mm