

DALI RGBW LED Dimmer CC

Datasheet Control Gear

RGBW LED Dimmer (CC, DT8)



common plus connector:

Art. Nr. 86458912-100 (100mA)

Art. Nr. 86458912-250 (250mA)

Art. Nr. 86458912-350 (350mA)

Art. Nr. 86458912-500 (500mA)

Art. Nr. 86458912-700 (700mA)

common minus connector:

Art. Nr. 86458912-250GM (250mA)

Art. Nr. 86458912-350GM (350mA)

Art. Nr. 86458912-500GM (500mA)

Art. Nr. 86458912-700GM (700mA)

DALI RGBW LED Dimmer CC Control Gear

Overview

- DALI LED-Dimmer for RGBW colour control
- Suitable for constant current LED-modules
- **Operating Mode DT8:** one DALI-address for the independent control of level and colour (DALI DT8, Type RGBWAF)
- **Operating Mode Colour&Dim:** control by 2 DALI-addresses, one for adjusting the level and one for adjusting the colour
- **SwitchDim2:** 2 switch-inputs offer control of level and colour without DALI
- dimming range 0.1%-100%
- adjustable PWM-frequency (122Hz/244Hz/488Hz/976Hz)
- types with common plus connector for constant currents up to 700mA
- types with common minus connector (GM) for constant currents up to 700mA
- independent electrical device, suitable for integration in luminaires (protection class II) or remote ceiling
- supply voltage 12V to 48V DC
- output voltage up to 45VDC
- integrated short circuit protection
- low standby power consumption
- high efficiency
- configuration via PC-software DALI-Cockpit and DALI USB-interface
- user-friendly factory default settings



Specification, Characteristics

Common Plus Connector (GP)

type	DALI RGBW 100mA GP	DALI RGBW 250mA GP	DALI RGBW 350mA GP	DALI RGBW 500mA GP	DALI RGBW 700mA GP
article number	86458912-100	86458912-250	86458912-350	86458912-500	86458912-700

input: V+, V-

input type	supply, DC				
marking terminals	V+, V-				
input voltage range	12V DC ... 48V DC (SELV)				
max. input current I_{in_max}	100mA	250mA	350mA	500mA	700mA
max. connection power	4,8W	12W	16,8W	24W	33,6W
standby power consumption	180mW @12V				
power on behaviour	configurable via DALI: 0%-100% or last value				

input: DA, DA

input type	DALI, control signal
------------	----------------------

marking terminals	DA, DA
input voltage range	9,5V ... 22,5V DC (according to IEC62386-101)
input current	$\leq 2\text{mA}$
number of DALI-addresses	operating mode DT8: 1 operating mode Colour&Dim: 2

Input: N, SW&DIM2-1, SW&DIM2-2

input type	SwitchDim2 control input
marking terminals	N; SW&DIM2-1 (DA); SW&DIM2-2 (DA)
number of inputs	2
input voltage	230V AC $\pm 10\%$
input supply frequency	50Hz
control pulse length	short: $> 40\text{ms}$, long: $> 400\text{ms}$
input resistance	200k Ω
max. voltage between inputs	230V AC

output: LED+, R-, G-, B-, W-

output type	LED Dimmer, constant current PWM				
marking terminals	LED+, R-, G-, B-, W-				
number of outputs	4				
PWM frequency	122Hz/244Hz/488Hz/976Hz				
output voltage range U_{led}	3V-45V (with 48V supply)				
max. output current per channel I_{led}	100mA	250mA	350mA	500mA	700mA
max. output power	4,5W	11,25W	15,75W	22,5	31,5W
overload protection	yes				
open circuit proof	yes				
short circuit proof	yes				

insulation data

impulse voltage category	II
pollution degree	2
rated insulation voltage	250V
Rated impulse voltage	4kV
Supply <-> output	no isolation
DALI <-> SwDim2	no isolation
DALI/SwDim2 <-> output/supply	reinforced isolation
DALI/SwDim2 <-> housing	reinforced isolation
insulation test voltage	3000VAC

environmental conditions

operational ambient temperature	-20°C ... +60°C
storing and transportation temperature	-20°C ... +75°C
rel. humidity, none condensing	15% ... 90%

general data

dimensions (LxWxH)	120mmx41mmx22mm
weight per packaging unit	80g
packaging unit	single packing
mounting	remote ceiling, integration in class II devices
rated max. temperature tc	75°C
expected life time @tc	100.000h
housing material	PC, class V0
protection class	II in intended use
protection degree housing	IP40
protection degree terminals	IP20

terminals: V+, V-

connection type	spring terminal connector (cage clamp)
wire size solid core	0,08 ... 2,5 mm ² (AWG28 ... AWG12)
wire size fine wired	0,08 ... 2,5mm ² (AWG 28 ... AWG 12)
wire size using wire end ferrule	0,25 ... 1 mm ²
stripping length	5 ... 6 mm / 0,2 ... 0,24 inch
material	PA66, class V0
release of wire	push back spring with tool

terminals: DA, DA, N, LED+, R-, G-, B-, W-

















































connection type	spring terminal connector (push in cage clamp)
wire size solid core	0,2 ... 1,5 mm ² (AWG20 ... AWG16)
wire size fine wired	0,2 ... 1,5 mm ² (AWG20 ... AWG16)
wire size using wire end ferrule	0,25 ... 1 mm ²
stripping length	8,5 ... 9,5mm / 0,33 ... 0,37inch
material	PA66, class V0
release of wire	push button


standards

DALI	EN 62386-101, EN 62386-102, EN 62386-207
EMV	EN 61547 EN 55015 / IEC CISPR15
safety	EN 61347-2-13 EN 61357-1
performance	EN 62384
markings	ENEC-11, CE, DALI

on request: output currents from 100mA to 700mA are available

factory default settings - delivery state

Operating mode	DT8																																																																																																																												
SwitchDim2	SwD1: level SwD2: colour																																																																																																																												
Min Level	0.1%																																																																																																																												
PowerOn Level	MASK (last value)																																																																																																																												
Fade Time	2 (1s)																																																																																																																												
Fade Rate	5 (89.4 steps/s)																																																																																																																												
PWM-frequency	122Hz																																																																																																																												
groups before intial addressing:	G0 (or G0 and G1 in operating mode Colour&Dim)																																																																																																																												
Predefined Scene Values:	<table><tr><th colspan="4"></th><th colspan="2">RGB</th><th colspan="2">White</th><th colspan="4"></th></tr><tr><td><input checked="" type="checkbox"/></td><td>0</td><td>MASK</td><td>%</td><td>211,0,42</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>8</td><td>MASK</td><td>%</td><td>0,152,101</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/></td><td>1</td><td>MASK</td><td>%</td><td>169,0,84</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>9</td><td>MASK</td><td>%</td><td>0,203,50</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/></td><td>2</td><td>MASK</td><td>%</td><td>127,0,127</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>10</td><td>MASK</td><td>%</td><td>0,254,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/></td><td>3</td><td>MASK</td><td>%</td><td>84,0,169</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>11</td><td>MASK</td><td>%</td><td>0,127,0</td><td></td><td>127</td></tr><tr><td><input checked="" type="checkbox"/></td><td>4</td><td>MASK</td><td>%</td><td>42,0,211</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>12</td><td>MASK</td><td>%</td><td>0,0,0</td><td></td><td>254</td></tr><tr><td><input checked="" type="checkbox"/></td><td>5</td><td>MASK</td><td>%</td><td>0,0,254</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>13</td><td>MASK</td><td>%</td><td>152,101,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/></td><td>6</td><td>MASK</td><td>%</td><td>0,50,203</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>14</td><td>MASK</td><td>%</td><td>203,50,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/></td><td>7</td><td>MASK</td><td>%</td><td>0,101,152</td><td></td><td>0</td><td><input checked="" type="checkbox"/></td><td>15</td><td>MASK</td><td>%</td><td>254,0,0</td><td></td><td>0</td></tr></table>					RGB		White						<input checked="" type="checkbox"/>	0	MASK	%	211,0,42		0	<input checked="" type="checkbox"/>	8	MASK	%	0,152,101		0	<input checked="" type="checkbox"/>	1	MASK	%	169,0,84		0	<input checked="" type="checkbox"/>	9	MASK	%	0,203,50		0	<input checked="" type="checkbox"/>	2	MASK	%	127,0,127		0	<input checked="" type="checkbox"/>	10	MASK	%	0,254,0		0	<input checked="" type="checkbox"/>	3	MASK	%	84,0,169		0	<input checked="" type="checkbox"/>	11	MASK	%	0,127,0		127	<input checked="" type="checkbox"/>	4	MASK	%	42,0,211		0	<input checked="" type="checkbox"/>	12	MASK	%	0,0,0		254	<input checked="" type="checkbox"/>	5	MASK	%	0,0,254		0	<input checked="" type="checkbox"/>	13	MASK	%	152,101,0		0	<input checked="" type="checkbox"/>	6	MASK	%	0,50,203		0	<input checked="" type="checkbox"/>	14	MASK	%	203,50,0		0	<input checked="" type="checkbox"/>	7	MASK	%	0,101,152		0	<input checked="" type="checkbox"/>	15	MASK	%	254,0,0		0
				RGB		White																																																																																																																							
<input checked="" type="checkbox"/>	0	MASK	%	211,0,42		0	<input checked="" type="checkbox"/>	8	MASK	%	0,152,101		0																																																																																																																
<input checked="" type="checkbox"/>	1	MASK	%	169,0,84		0	<input checked="" type="checkbox"/>	9	MASK	%	0,203,50		0																																																																																																																
<input checked="" type="checkbox"/>	2	MASK	%	127,0,127		0	<input checked="" type="checkbox"/>	10	MASK	%	0,254,0		0																																																																																																																
<input checked="" type="checkbox"/>	3	MASK	%	84,0,169		0	<input checked="" type="checkbox"/>	11	MASK	%	0,127,0		127																																																																																																																
<input checked="" type="checkbox"/>	4	MASK	%	42,0,211		0	<input checked="" type="checkbox"/>	12	MASK	%	0,0,0		254																																																																																																																
<input checked="" type="checkbox"/>	5	MASK	%	0,0,254		0	<input checked="" type="checkbox"/>	13	MASK	%	152,101,0		0																																																																																																																
<input checked="" type="checkbox"/>	6	MASK	%	0,50,203		0	<input checked="" type="checkbox"/>	14	MASK	%	203,50,0		0																																																																																																																
<input checked="" type="checkbox"/>	7	MASK	%	0,101,152		0	<input checked="" type="checkbox"/>	15	MASK	%	254,0,0		0																																																																																																																

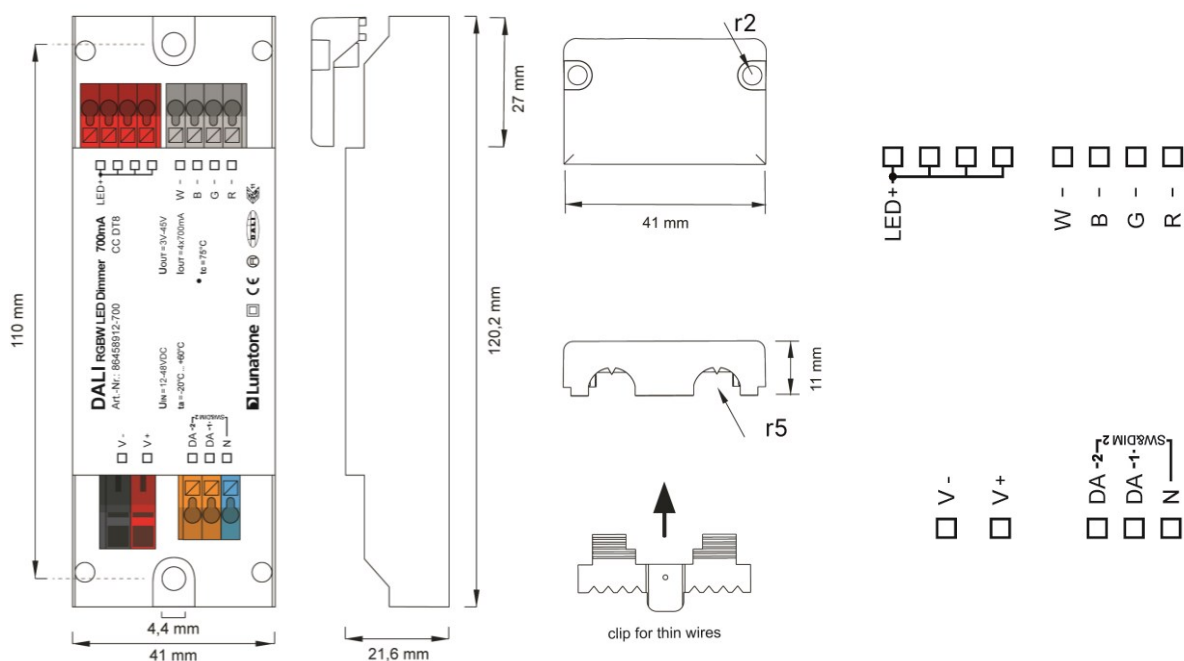

dimensions,
device type: common plus

connection plan,
device type: common plus

Common Minus Connector (GM)

type	DALI RGBW 250mA GM	DALI RGBW 350mA GM	DALI RGBW 500mA GM	DALI RGBW 700mA GM
article number	86458912-250GM	86458912-350GM	86458912-500GM	86458912-700GM

input: V+, V-

input type	supply, DC			
marking terminals	V+, V-			
input voltage range	12V DC ... 48V DC (SELV)			
max. input current I_{in_max}	250mA	350mA	500mA	700mA
max. connection power	12W	16,8W	24W	33,6W
standby power consumption	180mW @12V			
power on behaviour	configurable via DALI: 0%-100% or last value			

input: DA, DA

input type	DALI, control signal			
marking terminals	DA, DA			
input voltage range	9,5V ... 22,5V DC (according to IEC62386-101)			
input current	$\leq 2\text{mA}$			
number of DALI-addresses	operating mode DT8: 1 operating mode Colour&Dim: 2			

Input: N, SW&DIM2-1, SW&DIM2-2

input type	SwitchDim2 control input			
marking terminals	N; SW&DIM2-1 (DA); SW&DIM2-2 (DA)			
number of inputs	2			
input voltage	230V AC $\pm 10\%$			
input supply frequency	50Hz			
control pulse length	short: >40ms, long: > 400ms			
input resistance	200k Ω			
max. voltage between inputs	230V AC			

output: LED-, R+, G+, B+, W+

output type	LED Dimmer, constant current PWM			
marking terminals	LED-, R+, G+, B+, W+			
number of outputs	4			
PWM frequency	122Hz/244Hz/488Hz/976Hz			
output voltage range U_{led}	3V-45V (with 48V supply)			
max. output current per channel I_{led}	250mA	350mA	500mA	700mA
max. output power	11,25W	15,75W	22,5	31,5W
overload protection	yes			
open circuit proof	yes			
short circuit proof	yes			

insulation data

impulse voltage category	II			
pollution degree	2			
rated insulation voltage	250V			

Rated impulse voltage	4kV
Supply <-> output	no isolation
DALI <-> SwDim2	no isolation
DALI/SwDim2 <-> output/supply	reinforced isolation
DALI/SwDim2 <-> housing	reinforced isolation
insulation test voltage	3000VAC

environmental conditions

operational ambient temperature	-20°C ... +60°C
storing and transportation temperature	-20°C ... +75°C
rel. humidity, none condensing	15% ... 90%

general data

dimensions (LxWxH)	120mmx41mmx22mm
weight per packaging unit	80g
packaging unit	single packing
mounting	remote ceiling, integration in class II devices
rated max. temperature tc	75°C
expected life time @tc	100.000h
housing material	PC, class V0
protection class	II in intended use
protection degree housing	IP40
protection degree terminals	IP20

terminals: V+, V-

connection type	spring terminal connector (cage clamp)
wire size solid core	0,08 ... 2,5 mm ² (AWG28 ... AWG12)
wire size fine wired	0,08 ... 2,5mm ² (AWG 28 ... AWG 12)
wire size using wire end ferrule	0,25 ... 1 mm ²
stripping length	5 ... 6 mm / 0,2 ... 0,24 inch
material	PA66, class V0
release of wire	push back spring with tool

terminals: DA, N, LED-, R+, G+, B+, W+

connection type	spring terminal connector (push in cage clamp)
wire size solid core	0,2 ... 1,5 mm ² (AWG20 ... AWG16)
wire size fine wired	0,2 ... 1,5 mm ² (AWG20 ... AWG16)
wire size using wire end ferrule	0,25 ... 1 mm ²
stripping length	8,5 ... 9,5mm / 0,33 ... 0,37inch
material	PA66, class V0
release of wire	push button

















































standards


DALI	EN 62386-101, EN 62386-102, EN 62386-207
------	--

EMV	EN 61547 EN 55015 / IEC CISPR15
safety	EN 61347-2-13 EN 61357-1
performance	EN 62384
markings	ENEC-11, CE, DALI

on request: output currents from 100mA to 700mA available

factory default settings - delivery state

Operating mode	DT8																																																																																																											
SwitchDim2	SwD1: level SwD2: colour																																																																																																											
Min Level	0.1%																																																																																																											
PowerOn Level	MASK (last value)																																																																																																											
Fade Time	2 (1s)																																																																																																											
Fade Rate	5 (89.4 steps/s)																																																																																																											
PWM-frequency	122Hz																																																																																																											
groups before intial addressing:	G0 (or G0 and G1 in operating mode Colour&Dim)																																																																																																											
Predefined Scene Values:	<table><tr><th colspan="3"></th><th>RGB</th><th>White</th><th colspan="3"></th><th colspan="3"></th></tr><tr><td><input checked="" type="checkbox"/> 0</td><td>MASK</td><td>%</td><td>211,0,42</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 8</td><td>MASK</td><td>%</td><td>0,152,101</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 1</td><td>MASK</td><td>%</td><td>169,0,84</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 9</td><td>MASK</td><td>%</td><td>0,203,50</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 2</td><td>MASK</td><td>%</td><td>127,0,127</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 10</td><td>MASK</td><td>%</td><td>0,254,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 3</td><td>MASK</td><td>%</td><td>84,0,169</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 11</td><td>MASK</td><td>%</td><td>0,127,0</td><td></td><td>127</td></tr><tr><td><input checked="" type="checkbox"/> 4</td><td>MASK</td><td>%</td><td>42,0,211</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 12</td><td>MASK</td><td>%</td><td>0,0,0</td><td></td><td>254</td></tr><tr><td><input checked="" type="checkbox"/> 5</td><td>MASK</td><td>%</td><td>0,0,254</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 13</td><td>MASK</td><td>%</td><td>152,101,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 6</td><td>MASK</td><td>%</td><td>0,50,203</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 14</td><td>MASK</td><td>%</td><td>203,50,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 7</td><td>MASK</td><td>%</td><td>0,101,152</td><td></td><td>0</td><td><input checked="" type="checkbox"/> 15</td><td>MASK</td><td>%</td><td>254,0,0</td><td></td><td>0</td></tr></table>				RGB	White							<input checked="" type="checkbox"/> 0	MASK	%	211,0,42		0	<input checked="" type="checkbox"/> 8	MASK	%	0,152,101		0	<input checked="" type="checkbox"/> 1	MASK	%	169,0,84		0	<input checked="" type="checkbox"/> 9	MASK	%	0,203,50		0	<input checked="" type="checkbox"/> 2	MASK	%	127,0,127		0	<input checked="" type="checkbox"/> 10	MASK	%	0,254,0		0	<input checked="" type="checkbox"/> 3	MASK	%	84,0,169		0	<input checked="" type="checkbox"/> 11	MASK	%	0,127,0		127	<input checked="" type="checkbox"/> 4	MASK	%	42,0,211		0	<input checked="" type="checkbox"/> 12	MASK	%	0,0,0		254	<input checked="" type="checkbox"/> 5	MASK	%	0,0,254		0	<input checked="" type="checkbox"/> 13	MASK	%	152,101,0		0	<input checked="" type="checkbox"/> 6	MASK	%	0,50,203		0	<input checked="" type="checkbox"/> 14	MASK	%	203,50,0		0	<input checked="" type="checkbox"/> 7	MASK	%	0,101,152		0	<input checked="" type="checkbox"/> 15	MASK	%	254,0,0		0
			RGB	White																																																																																																								
<input checked="" type="checkbox"/> 0	MASK	%	211,0,42		0	<input checked="" type="checkbox"/> 8	MASK	%	0,152,101		0																																																																																																	
<input checked="" type="checkbox"/> 1	MASK	%	169,0,84		0	<input checked="" type="checkbox"/> 9	MASK	%	0,203,50		0																																																																																																	
<input checked="" type="checkbox"/> 2	MASK	%	127,0,127		0	<input checked="" type="checkbox"/> 10	MASK	%	0,254,0		0																																																																																																	
<input checked="" type="checkbox"/> 3	MASK	%	84,0,169		0	<input checked="" type="checkbox"/> 11	MASK	%	0,127,0		127																																																																																																	
<input checked="" type="checkbox"/> 4	MASK	%	42,0,211		0	<input checked="" type="checkbox"/> 12	MASK	%	0,0,0		254																																																																																																	
<input checked="" type="checkbox"/> 5	MASK	%	0,0,254		0	<input checked="" type="checkbox"/> 13	MASK	%	152,101,0		0																																																																																																	
<input checked="" type="checkbox"/> 6	MASK	%	0,50,203		0	<input checked="" type="checkbox"/> 14	MASK	%	203,50,0		0																																																																																																	
<input checked="" type="checkbox"/> 7	MASK	%	0,101,152		0	<input checked="" type="checkbox"/> 15	MASK	%	254,0,0		0																																																																																																	

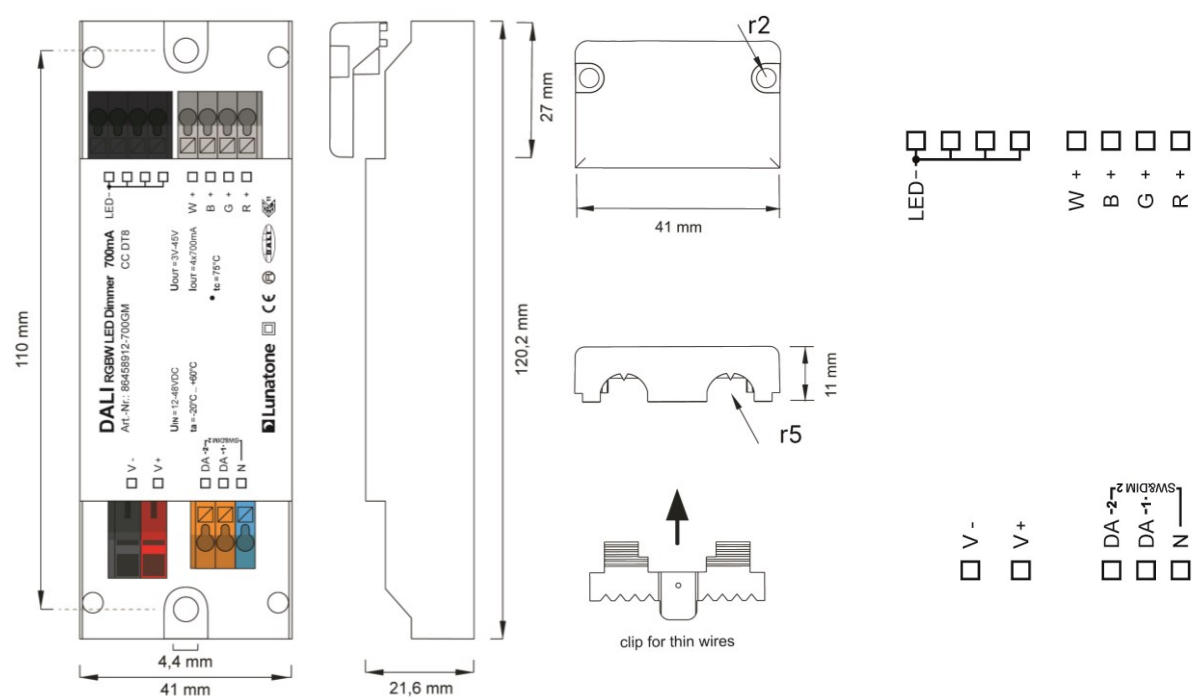

dimensions,
device type: common minus

connection plan,
device type: common minus

Installation

- The DALI RGBW LED Dimmer is an independent device and is intended for remote ceiling installation or in an enclosure.
- ensure proper cable relief for installation in protection class II devices
- The wiring should be carried out as a permanent installation in a dry and clean environment.
- Installation may only be carried out in a voltage-free state of the system and by qualified specialists.
- National regulations for setting up electrical systems must be followed.
- Connect terminals V + and V- to a DC voltage supply of the SELV category (Safety Extra Low Voltage) according to their label.
- The connection to the DALI line (terminals DA,DA) can be made regardless of polarity.
- The DALI bus input is protected against overvoltage (mains voltage) - this protects the component from being destroyed in the event of incorrect wiring



Hint:

For highest efficiency the input voltage should range between 3V and 10V above the LED-voltage:

4-6 LEDs: 24V

6-9LEDs: 36V

10-12 LEDS: 48V


- Wiring topology of the DALI-line: Line, Tree, Star
- for alternative use as Sw&Dim inputs, the same phase must be used for both inputs
- The DALI wiring can be realised with standard low-voltage installation material. No special cables are required.
- Only 1 wire may be connected to each terminal. When using double wire end ferrules, the connection capacity of the terminal must be considered.



Attention: The DALI-signal is not classified as SELV (Safety Extra Low Voltage) circuit. Therefore, the standards for installation in low voltage systems apply.




The voltage drop on the DALI line must not exceed 2V at maximum length (300m) and maximum bus load (250mA).

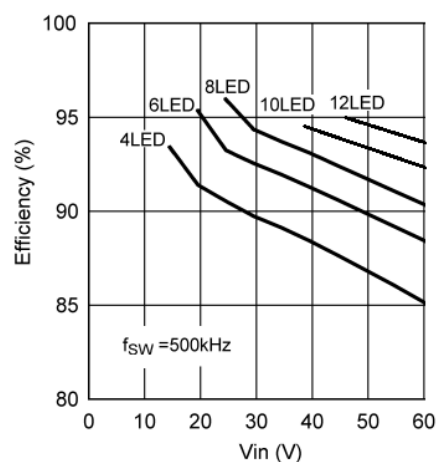


Application Example

Control via DALI

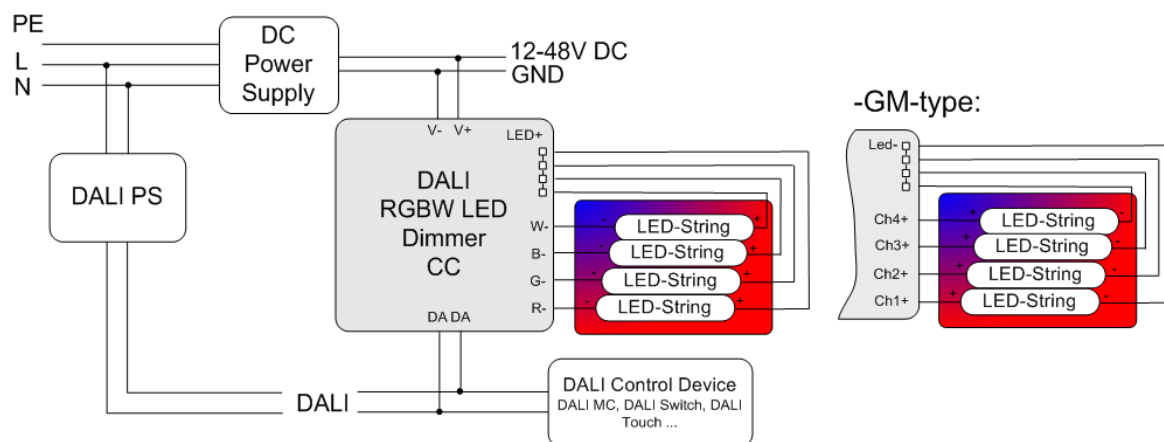

Control via SwitchDim2

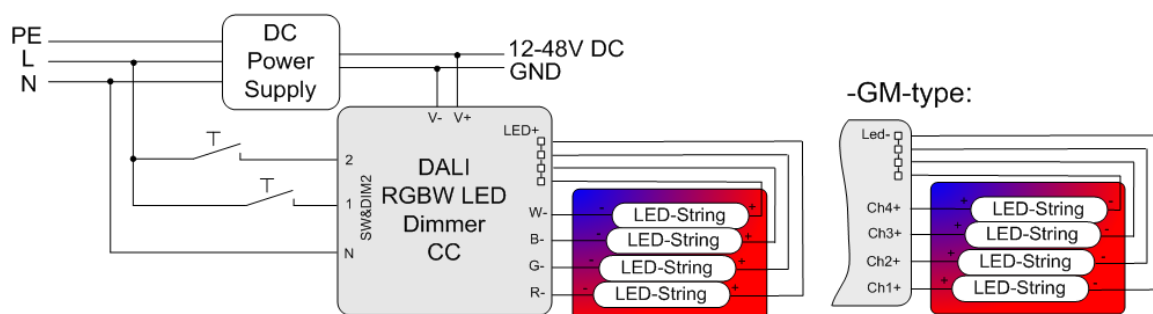

Operating Modes

The device offers several operating modes:

DT8 (factory default)

In this operating mode one DALI-address for the independent control of light level and colour is used (Device Type 8 RGBWAF).

Alternatively the device can be controlled using 2 switch-inputs for mains voltage (SwitchDim2):

SwD1: light level

short press: On/Off

long press: dimming

SwD2: colour

long press: change colour

Colour&Dim


This operating mode is suitable for operating RGB—luminaires. Two DALI-addresses are used, the first to control the light level and the second for changing the distribution on the output channels (e.g. for colour adjustments).

The Colour&Dim mode allows colour adjustments without affecting the level and vice versa. For each channel only DALI-standard commands like dim up/down but also DAP are used. Thus the device can be used with all common controls and gateways (e.g. KNX). The Colour&Dim mode provides an alternative to the DT8-RGBWAF mode.

Can be operated via DALI or SwitchDim2:

DALI-address 1, SwD1: light level


DALI-address 2, SwD2: colour

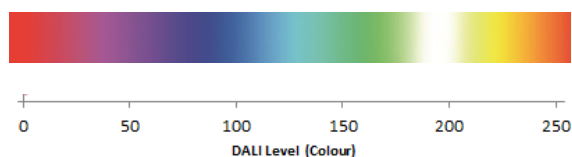

Selection of operating mode


With the help of the PC-software tool DALI-Cockpit the operating mode can be easily set on the general settings page.

Operating mode DT8-RGBWAF:

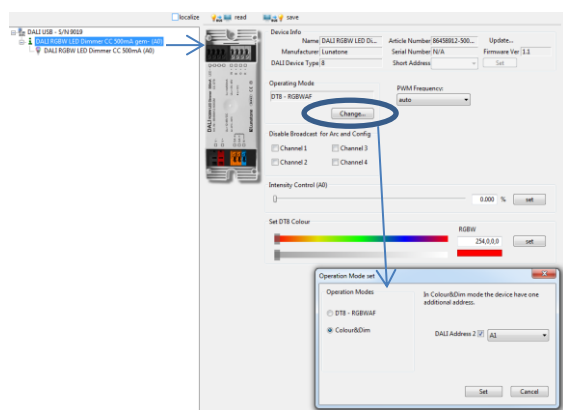

In addition, on the same page the PWM-frequency can be selected and basic control elements for testing each operating modes are available (slider for level and colour in the operating modes DT8 and Colour&Dim). Furthermore the broadcast control can be deactivated for each channel individually.

Operating mode Colour&Dim:

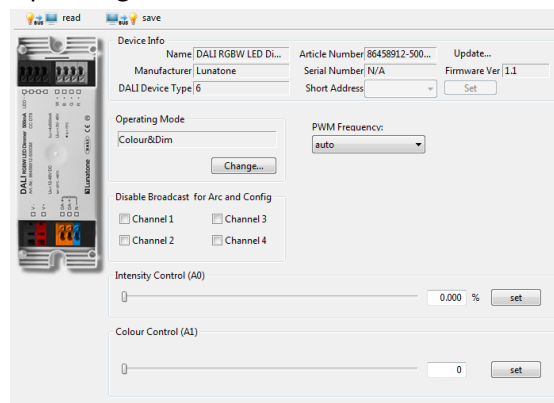

Switching between operating modes can also be done with the help of the DALI-command SET OPERATING MODE (IEC 62386-102 Ed.2). When changing the operating mode the number of used DALI-addresses can change as well and this requires a new addressing procedure. In the DALI-Cockpit this address assignment is performed automatically.


Operating Mode:

number	operating mode
0x0	DT8 (factory default)
0x92	DT8
0x93	Colour&Dim


Additional Settings

Besides the settings on the general page each channel can be selected separately in the component tree for individual configuration.


Component Tree:

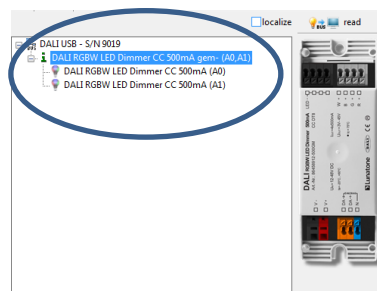

Settings in the operating mode DT8-RGBWAF (displayed parameters are the factory default values):

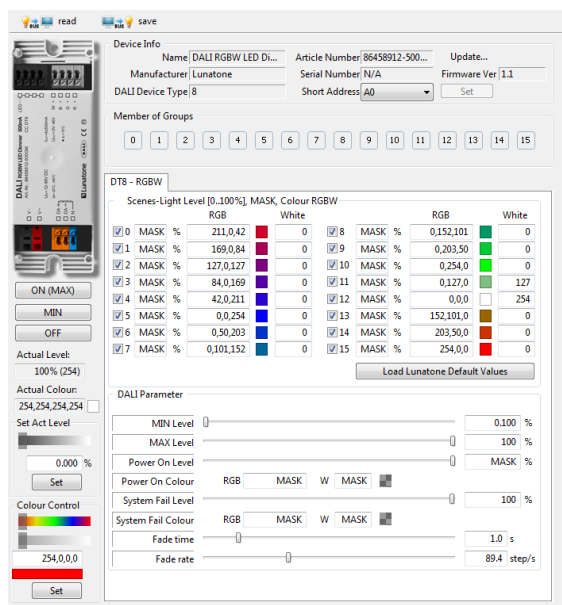

Settings for each channel in the operating mode Colour&Dim:

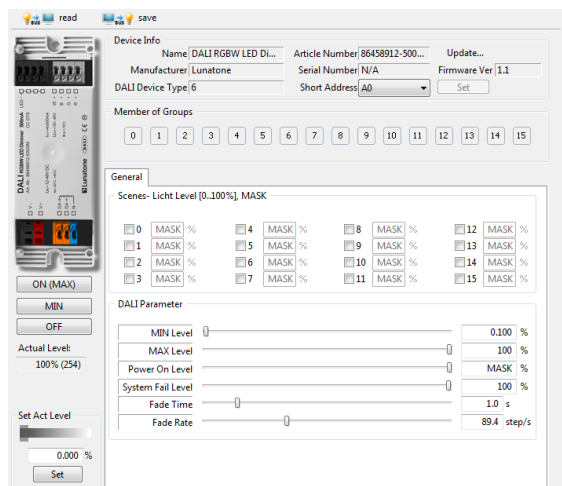











































For each address the group membership can be set as well as scene values and DALI-parameters. In Colour&Dim operating mode, all values assigned to channel 2 are representing colours.

Factory Default Settings

Before the initial addressing is performed, the device can already be controlled by a group address. This predefined grouping will be deleted during the first addressing procedure. Afterwards groups can be assigned as usual (e.g. with the help of the DALI-Cockpit). By sending a DALI-Reset command the device is set to the DALI default values as defined in the standard.

Summary of the factory default settings (delivery state):

Operating mode	DT8																																																																																																						
SwitchDim2	SwD1: level SwD2: colour																																																																																																						
Min Level	0.1%																																																																																																						
PowerOn Level	MASK (last value)																																																																																																						
Fade Time	2 (1s)																																																																																																						
Fade Rate	5 (89.4 steps/s)																																																																																																						
PWM-frequency	122Hz																																																																																																						
Groups before initial addressing:	G0 (or G0 and G1 in operating mode Colour&Dim)																																																																																																						
Predefined Scene Values:	<table><thead><tr><th colspan="3"></th><th>RGB</th><th></th><th>White</th></tr></thead><tbody><tr><td><input checked="" type="checkbox"/> 0</td><td>MASK</td><td>%</td><td>211,0,42</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 1</td><td>MASK</td><td>%</td><td>169,0,84</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 2</td><td>MASK</td><td>%</td><td>127,0,127</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 3</td><td>MASK</td><td>%</td><td>84,0,169</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 4</td><td>MASK</td><td>%</td><td>42,0,211</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 5</td><td>MASK</td><td>%</td><td>0,0,254</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 6</td><td>MASK</td><td>%</td><td>0,50,203</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 7</td><td>MASK</td><td>%</td><td>0,101,152</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 8</td><td>MASK</td><td>%</td><td>0,152,101</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 9</td><td>MASK</td><td>%</td><td>0,203,50</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 10</td><td>MASK</td><td>%</td><td>0,254,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 11</td><td>MASK</td><td>%</td><td>0,127,0</td><td></td><td>127</td></tr><tr><td><input checked="" type="checkbox"/> 12</td><td>MASK</td><td>%</td><td>0,0,0</td><td></td><td>254</td></tr><tr><td><input checked="" type="checkbox"/> 13</td><td>MASK</td><td>%</td><td>152,101,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 14</td><td>MASK</td><td>%</td><td>203,50,0</td><td></td><td>0</td></tr><tr><td><input checked="" type="checkbox"/> 15</td><td>MASK</td><td>%</td><td>254,0,0</td><td></td><td>0</td></tr></tbody></table>				RGB		White	<input checked="" type="checkbox"/> 0	MASK	%	211,0,42		0	<input checked="" type="checkbox"/> 1	MASK	%	169,0,84		0	<input checked="" type="checkbox"/> 2	MASK	%	127,0,127		0	<input checked="" type="checkbox"/> 3	MASK	%	84,0,169		0	<input checked="" type="checkbox"/> 4	MASK	%	42,0,211		0	<input checked="" type="checkbox"/> 5	MASK	%	0,0,254		0	<input checked="" type="checkbox"/> 6	MASK	%	0,50,203		0	<input checked="" type="checkbox"/> 7	MASK	%	0,101,152		0	<input checked="" type="checkbox"/> 8	MASK	%	0,152,101		0	<input checked="" type="checkbox"/> 9	MASK	%	0,203,50		0	<input checked="" type="checkbox"/> 10	MASK	%	0,254,0		0	<input checked="" type="checkbox"/> 11	MASK	%	0,127,0		127	<input checked="" type="checkbox"/> 12	MASK	%	0,0,0		254	<input checked="" type="checkbox"/> 13	MASK	%	152,101,0		0	<input checked="" type="checkbox"/> 14	MASK	%	203,50,0		0	<input checked="" type="checkbox"/> 15	MASK	%	254,0,0		0
			RGB		White																																																																																																		
<input checked="" type="checkbox"/> 0	MASK	%	211,0,42		0																																																																																																		
<input checked="" type="checkbox"/> 1	MASK	%	169,0,84		0																																																																																																		
<input checked="" type="checkbox"/> 2	MASK	%	127,0,127		0																																																																																																		
<input checked="" type="checkbox"/> 3	MASK	%	84,0,169		0																																																																																																		
<input checked="" type="checkbox"/> 4	MASK	%	42,0,211		0																																																																																																		
<input checked="" type="checkbox"/> 5	MASK	%	0,0,254		0																																																																																																		
<input checked="" type="checkbox"/> 6	MASK	%	0,50,203		0																																																																																																		
<input checked="" type="checkbox"/> 7	MASK	%	0,101,152		0																																																																																																		
<input checked="" type="checkbox"/> 8	MASK	%	0,152,101		0																																																																																																		
<input checked="" type="checkbox"/> 9	MASK	%	0,203,50		0																																																																																																		
<input checked="" type="checkbox"/> 10	MASK	%	0,254,0		0																																																																																																		
<input checked="" type="checkbox"/> 11	MASK	%	0,127,0		127																																																																																																		
<input checked="" type="checkbox"/> 12	MASK	%	0,0,0		254																																																																																																		
<input checked="" type="checkbox"/> 13	MASK	%	152,101,0		0																																																																																																		
<input checked="" type="checkbox"/> 14	MASK	%	203,50,0		0																																																																																																		
<input checked="" type="checkbox"/> 15	MASK	%	254,0,0		0																																																																																																		

Purchase Order Information

Art.Nr. 86458912-xxx: DALI RGBW LED Dimmer, CC – constant current xxx mA (100mA-700mA), **common plus connector**, supply 12V-48V DC, output voltage 3V-45V DC, **SwitchDim2**, remote ceiling & integration in luminaires

Art.Nr. 86458912-xxxGM: DALI RGBW LED Dimmer, CC – constant current xxx mA (100mA-700mA), **common minus connector**, supply 12V-48V DC, output voltage 3V-45V DC, **SwitchDim2**, remote ceiling & integration in luminaires

Additional Information and Equipment

DALI-Cockpit – free configuration tool from Lunatone for DALI systems
<https://www.lunatone.com/en/product/dali-cockpit/>

Lunatone DALI products
<https://www.lunatone.com/en/>

Lunatone datasheets and manuals
<https://www.lunatone.com/en/downloads-az/>

Contact

Technical Support: support@lunatone.com

Requests: sales@lunatone.com

www.lunatone.com



Disclaimer

Subject to change. Information provided without guarantee.
The datasheet refers to the current delivery.

The compatibility with other devices must be tested in advance to the installation.