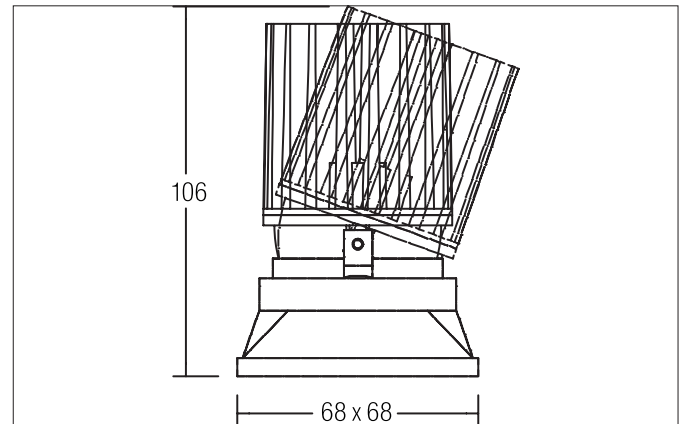


COUPLED LED-System-recessed spot COUPLED, dim2warm

Artikel-Nr. 12643073

Licht.
Für Generationen.**Tender**

LED-System-recessed spot COUPLED, dim2warm, white, square. In a compact design, for installation in tool-less rapid assembly systems. If the lamp is dimmed, the color temperature is reduced. Installation is only with plaster or installation frame 82040170, 82041170, 82042170 or 82043170 possible. . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 500 mA, Power: 9.4W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 920lm, Colour temperature: from 1.800 K up to 3.000 K, Beam angle: 34°, Adjustability: Rotable and pivoted, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	12643073
GTIN	4251433916161
Series name	COUPLED
Kurzbeschreibung	LED-System-recessed spot COUPLED, dim2warm
Material	Aluminium / Plastic
Colour	White
Type of surface	Matt
Shape	square
Installation depth	106 mm
Length	68 mm
Width	68 mm
weight	0.193 kg

COUPLED LED-System-recessed spot COUPLED, dim2warm

Artikel-Nr. 12643073

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K - 1800 K
Light colour	White
Light output	Direct
Luminous flux	920 lm
System efficiency	98 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	34 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	9.4 W
Voltage type	DC
Current	500 mA
Lamp	LED
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17823 17824 17826 17829
Control	Other
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	20°
Rotation angle	350°
Further references	No cover with thermal insulation material

Packing data	
Gross weight	0.263 kg
Length of packaging	105 mm
Packaging width	105 mm
Packaging height	130 mm

Accessories	
	Artikel-Nr.: 17823010 Kurzbeschreibung: LED converter 500 mA, on/off Leistung: 1 - 22 W Abmessung: 146.5 mm x 43.5 mm x 30 mm
	Artikel-Nr.: 17824010 Kurzbeschreibung: LED converter 500 mA, 1-10V dimmable (analog) Leistung: 5 - 27 W Abmessung: 146.5 mm x 43.5 mm x 30 mm
	Artikel-Nr.: 17826010 Kurzbeschreibung: LED converter 500 mA, DALI dimmable (digital) Leistung: 5 - 27 W Abmessung: 146.5 mm x 44 mm x 30 mm
	Artikel-Nr.: 17829010 Kurzbeschreibung: LED converter 500 mA, trailing-edge phase dimmable Leistung: 1 - 24 W Abmessung: 166 mm x 46 mm x 34 mm

Date 10.12.2021 All technical data as well as, weight and measurements are based on rated values and had been carefully prepared.

We reserve the right to make technical changes which are important in progressing. Product pictures are examples and can vary from the original.

Subject to errors.

Orders are placed under our general terms and conditions under <https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/>

COUPLED LED-System-recessed spot COUPLED, dim2warm
Artikel-Nr. 12643073

Licht.
Für Generationen.