


Driver LC 10W 350/500/700mA fixC C SNC

ESSENCE series

Product description

- Fixed output built-in LED Driver
- Constant current LED Driver
- Output current 350, 500 or 700 mA
- Max. output power 10 W
- Nominal life-time up to 50,000 h
- For luminaires of protection class I and protection class II
- Temperature protection as per EN 61347-2-13 C5e
- 5-year guarantee

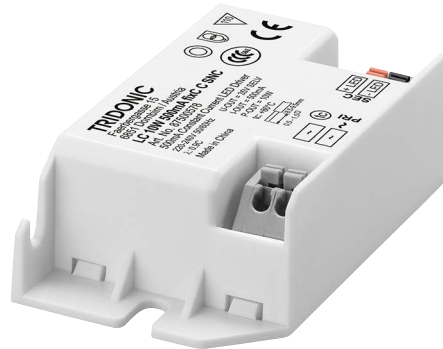

Properties

- Casing: polycarbonat, white
- Type of protection IP20

Functions

- Overload protection
- Short-circuit protection
- No-load protection



Standards, page 3

Wiring diagrams and installation examples, page 4




IP20 SELV     

Driver LC 10W 350/500/700mA fixC C SNC

ESSENCE series

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
Mains frequency	50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
THD (at 230 V, 50 Hz, full load)	< 20 %
Output current tolerance [®]	± 7.5 %
Typ. current ripple (at 230 V, 50 Hz, full load)	± 40 %
Turn on time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Turn off time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Hold on time at power failure (output)	0 s
Ambient temperature t_a	-20 ... +50 °C
Ambient temperature t_a (at life-time 50,000 h)	40 °C
Storage temperature t_s	-40 ... +80 °C
Dimensions L x W x H	80 x 40 x 21 mm

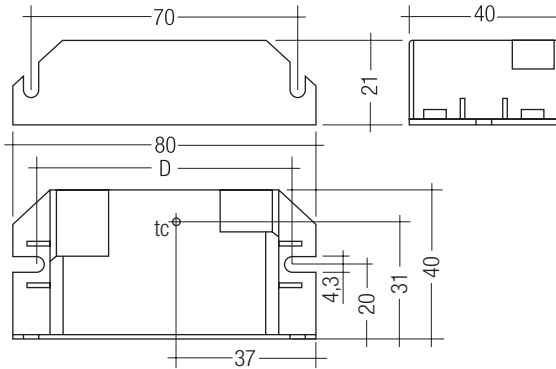

Ordering data

Type [®]	Article number	Packaging, carton	Packaging, low volume	Packaging, high volume	Weight per pc.
LC 10W 350mA fixC C SNC	87500577	20 pc(s).	280 pc(s).	3,360 pc(s).	0.043 kg
LC 10W 500mA fixC C SNC	87500578	20 pc(s).	280 pc(s).	3,360 pc(s).	0.043 kg
LC 10W 700mA fixC C SNC	87500579	20 pc(s).	280 pc(s).	3,360 pc(s).	0.043 kg

Specific technical data

Type	Output current [®]	Input current (at 230 V, 50 Hz, full load)	Max. input power	Typ. power consumption (at 230 V, 50 Hz, full load)	Output power range	Power factor at full load [®]	Efficiency at full load [®]	Power factor at min. load [®]	Efficiency at min. load [®]	Min. forward voltage	Max. forward voltage	Max. output voltage	Max. output peak current at full load [®]	Max. output peak current at min. load [®]	Max. casing temperature t_c
LC 10W 350mA fixC C SNC	350 mA	0.060 A	12.5 W	12 W	7 – 10 W	0.9C	83 %	0.85C	81 %	20 V	28.6 V	42 V	550 mA	600 mA	80 °C
LC 10W 500mA fixC C SNC	500 mA	0.060 A	12.5 W	12 W	7 – 10 W	0.9C	83 %	0.85C	80 %	14 V	20.0 V	35 V	780 mA	820 mA	80 °C
LC 10W 700mA fixC C SNC	700 mA	0.065 A	12.5 W	12 W	7 – 10 W	0.9C	81 %	0.85C	78 %	10 V	14.2 V	25 V	1,100 mA	1,150 mA	80 °C

[®] Test result at 230 V, 50 Hz.

[®] The trend between min. and full load is linear.

[®] Output current is mean value.

Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Overload protection

If the output voltage range is exceeded the LED Driver will protect itself and LED may flicker. After elimination of the overload, the nominal operation is restored automatically.

Short-circuit behaviour

In case of a short circuit on the secondary side (LED) the LED Driver switches into hic-cup mode. After elimination of the short-circuit fault the LED Driver will recover automatically.

No-load operation

The LED Driver works in burst working mode to provide a constant output voltage regulation which allows the application to be able to work safely when LED string opens due to a failure.

Installation instructions

The LED module and all contact points within the wiring must be sufficiently insulated against 3 kV surge voltage.
Air and creepage distance must be maintained.

Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 10 seconds
4. Connect LED module again

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Expected life-time

Type	ta	40 °C	50 °C	60 °C
LC 10W 350mA fixC C SNC	tc	70 °C	80 °C	x
	Life-time	50,000 h	30,000 h	x
LC 10W 500mA fixC C SNC	tc	70 °C	80 °C	x
	Life-time	50,000 h	30,000 h	x
LC 10W 700mA fixC C SNC	tc	70 °C	80 °C	x
	Life-time	50,000 h	30,000 h	x

The LED Drivers are designed for a life-time stated above under reference conditions and with a failure probability of less than 10 %.

Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	I _{max}	Time
LC 10W 350mA fixC C SNC	120	160	200	240	100	130	160	200	8 A	80 µs
LC 10W 500mA fixC C SNC	120	160	200	240	100	130	160	200	8 A	80 µs
LC 10W 700mA fixC C SNC	120	160	200	240	100	130	160	200	8 A	80 µs

Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

Mounting of device

Max. torque for fixing: 0.5 Nm/M4

Storage conditions

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)


Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.

Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LC 10W 350mA fixC C SNC	< 20	< 15	< 8	< 8	< 8	< 5
LC 10W 500mA fixC C SNC	< 20	< 10	< 8	< 6	< 6	< 6
LC 10W 700mA fixC C SNC	< 20	< 15	< 10	< 8	< 5	< 5

Wiring diagram

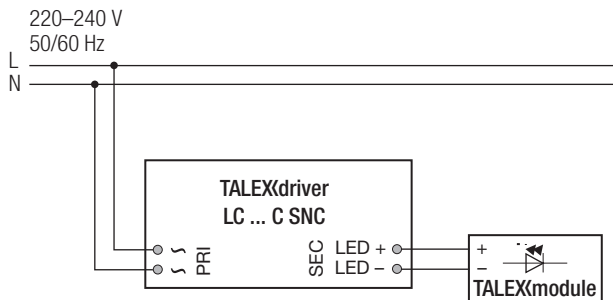

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Additional information

Additional technical information at www.tridonic.com → Technical Data


Guarantee conditions at www.tridonic.com → Services

Life-time declarations are informative and represent no warranty claim. No warranty if device was opened.

Wiring type and cross section

The wiring can be done with a cross section of 0.5 – 1.5 mm².

Strip 8.5 – 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.




Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).


Release of the wiring

Press down the “push button” and remove the cable from front.




Diagrams LC 10W 350mA fixC C SNC


Efficiency vs load

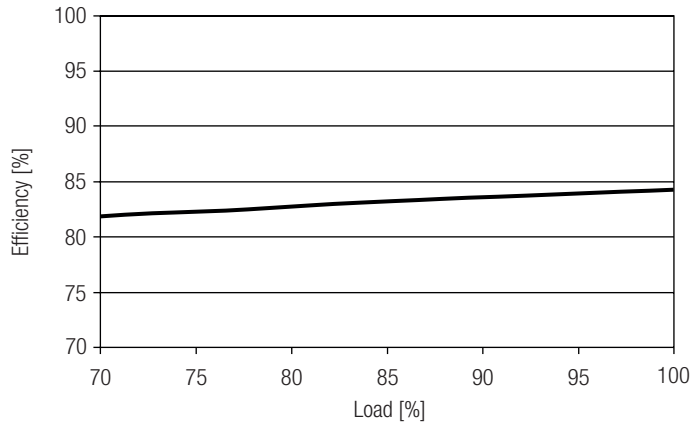


Power factor vs load

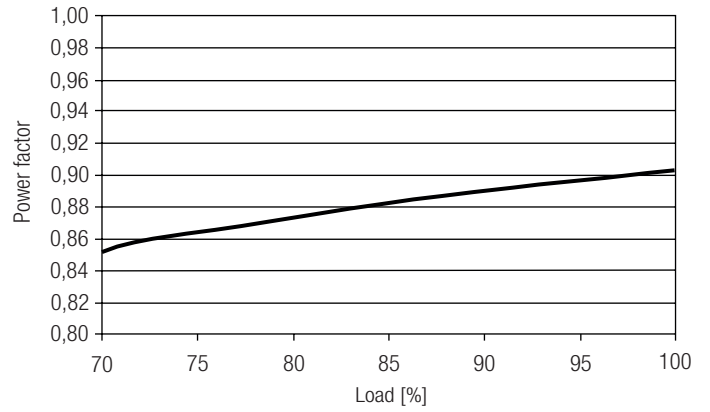


Input power vs load

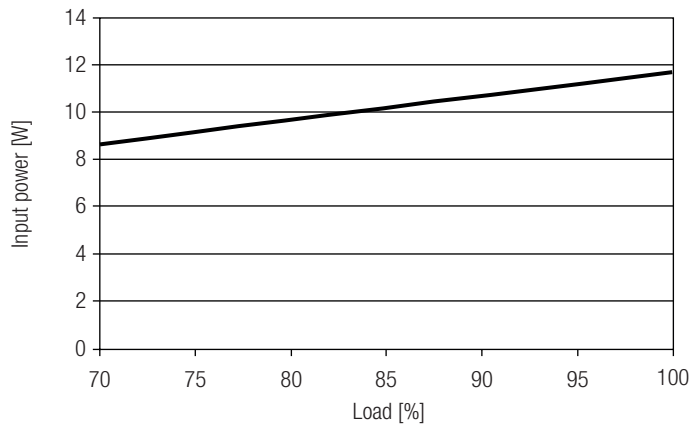

Input current vs load

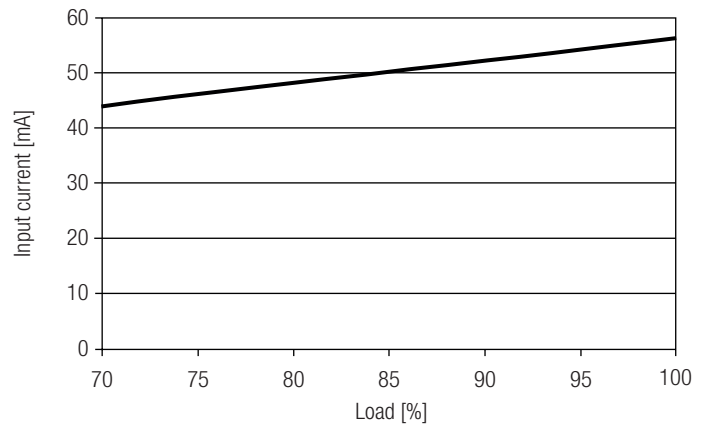


THD vs load

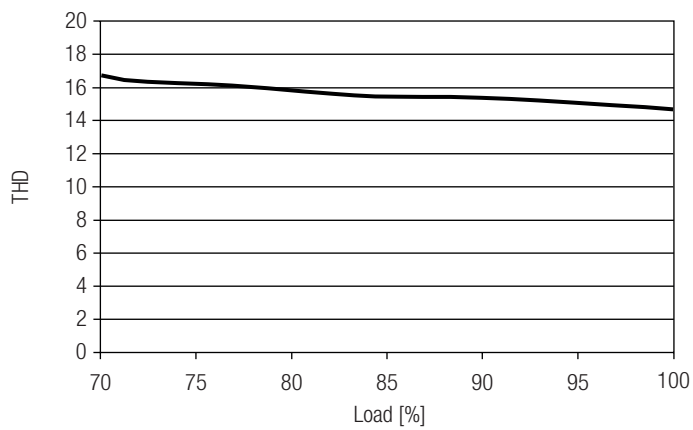


Diagrams LC 10W 500mA fix C SNC


Efficiency vs load

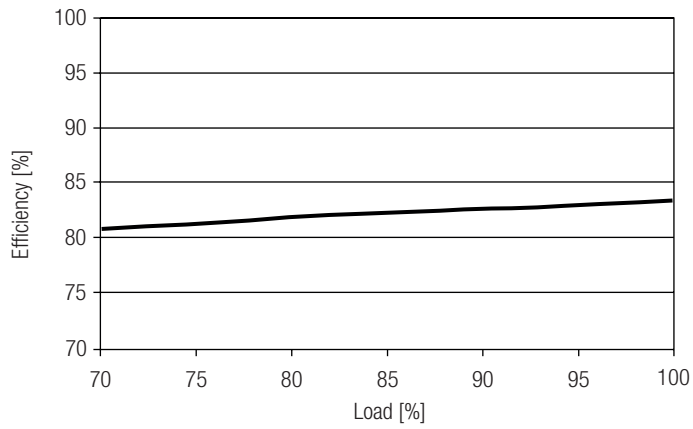


Power factor vs load

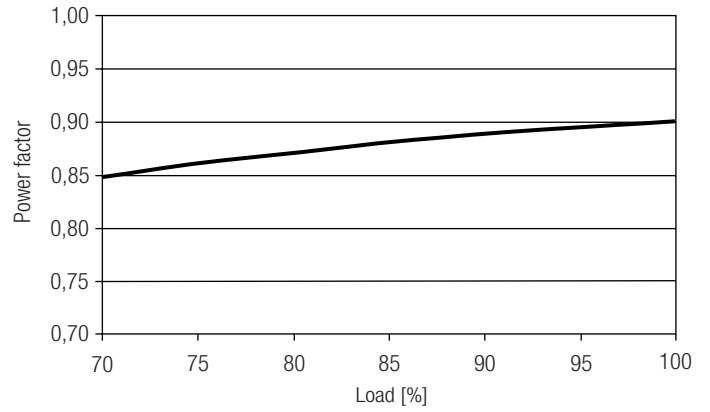


Input power vs load

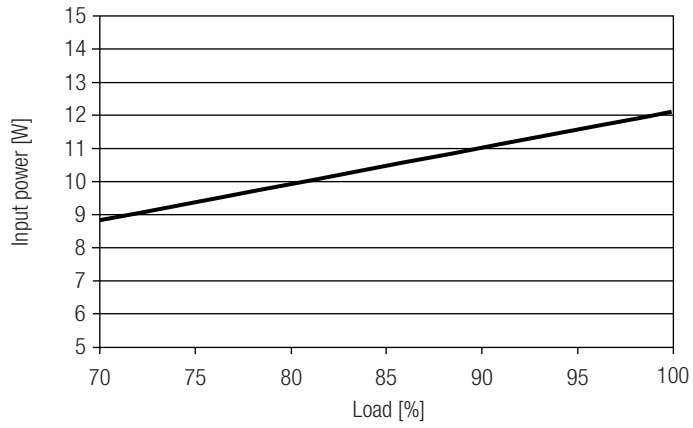

Input current vs load

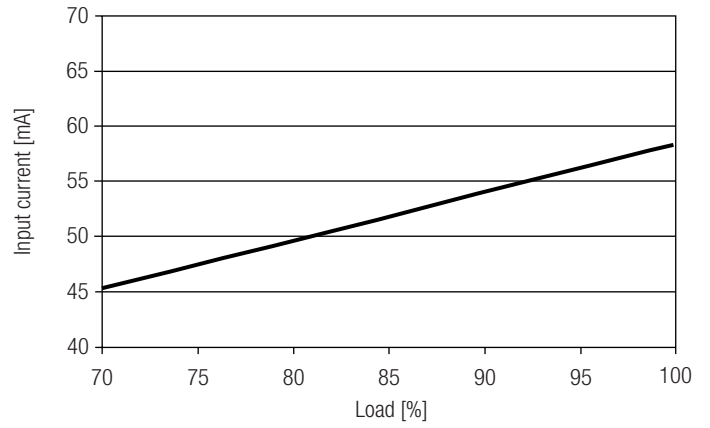


THD vs load

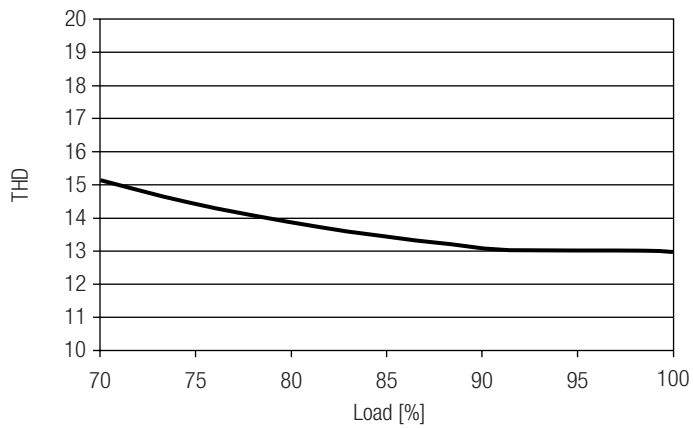


Diagrams LC 10W 700mA fixC C SNC


Efficiency vs load

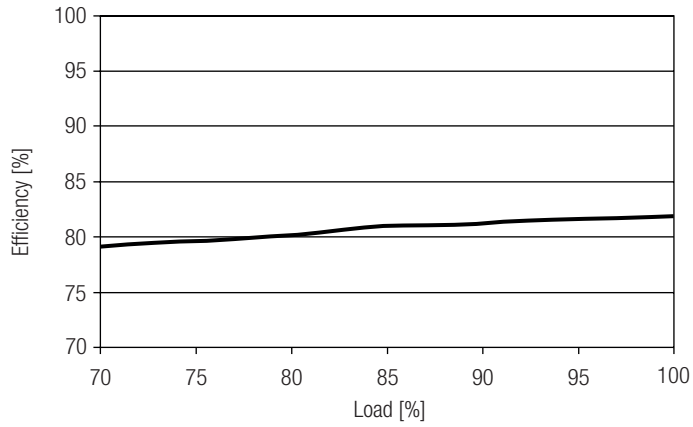


Power factor vs load

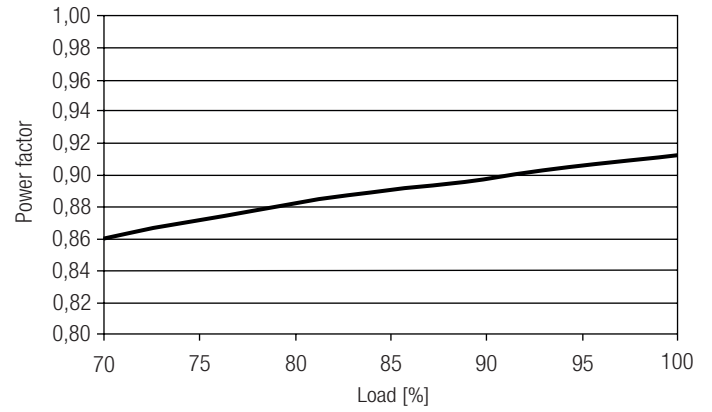

Input power vs load

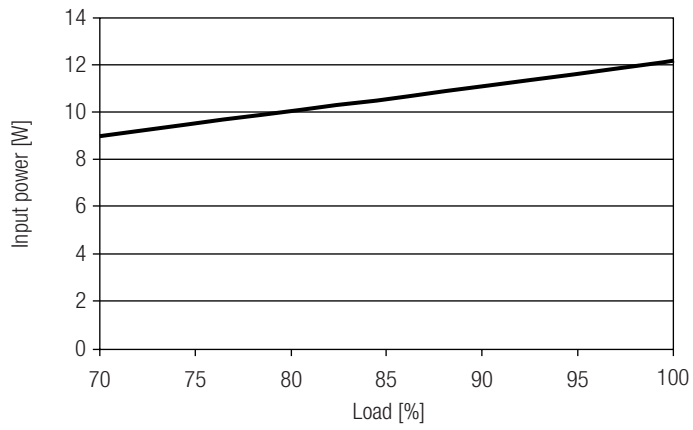

Input current vs load

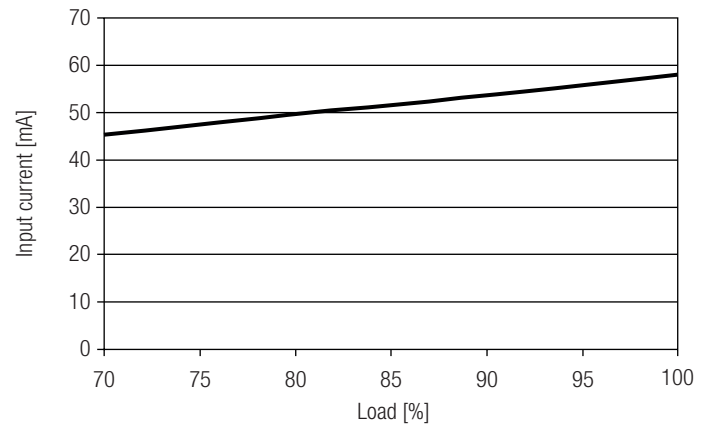

THD vs load

