


constant
CURRENTRIPPLE
FREEPst LM ≤ 1
SVM ≤ 0,4

2.1

 Multipower drivers - Compact case - Switchable
Alimentatori multipotenza - Formato compatto - Non regolabili


MP 65 H/2

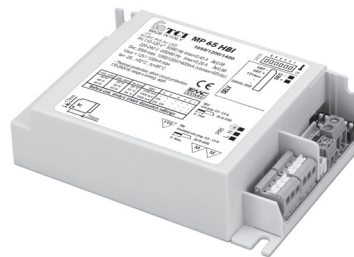

MP 65 HBI

**Rated Voltage****Tensione Nominale**110 ÷ 127 V⁽²⁾

220 ÷ 240 V

Frequency**Frequenza**

50-60 Hz

AC Operation range**Tensione di utilizzo AC**

99 ÷ 264 V

DC Operation range**Tensione di utilizzo DC**

(see page info15)

176 ÷ 280 V

Power - Potenza

2 ÷ 65 W

iTHD≤ 15%⁽¹⁾**Output current ripple**≤ 3%⁽¹⁾**Standards compliance**

CSA C22.2 NO. 223

EN 55015

EN 61000-3-2

EN 61000-3-3

EN 61347-1

EN 61347-2-13

EN 61547

EN 62384

UL 1012

UL 8750

Max. pcs for CB B16A

(see page info17)

30 pcs

In rush current

10A 200μsec

7
YEARS
WARRANTY
3% FAILURE RATE10
YEARS
WARRANTY
5% FAILURE RATEPRODUCER'S LIABILITY
TCI10
YEARS
WARRANTY
5% FAILURE RATE
ACCORDING TO
TUE DIRECTIVE

Article Articolo	Code Codice	P out W	V out DC ⁽¹⁾	I out DC	U out V	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾
MP 65 H/2 ⁽⁵⁾	127071	25 (25 ⁽²⁾)	10...70	350 mA cost.	95	-25...+45 ⁽⁵⁾ /50 ⁽⁴⁾	80	0,95 ⁽³⁾	> 90 %
MP 65 HBI ⁽⁴⁾	127051	31 (31 ⁽²⁾)	10...70	450 mA cost.					
		35 (35 ⁽²⁾)	2...70	500 mA cost.					
		38 (38 ⁽²⁾)	2...69	550 mA cost.					
		41 (40 ⁽²⁾)	2...68	600 mA cost.					
		48 (40 ⁽²⁾)	2...68	700 mA cost.					
		52 (40 ⁽²⁾)	2...66	800 mA cost.					
		60 (40 ⁽²⁾)	2...66	900 mA cost.					
		63 (40 ⁽²⁾)	2...66	950 mA cost.					
		65 (40 ⁽²⁾)	2...62	1,05 A cost.					
		65 (40 ⁽²⁾)	2...54	1,2 A cost.					
58Vout voltage limit settable with Dip-Switch - Poutmax=65W									

⁽¹⁾ Referred to V_{in} = 230 V, 100% load - Riferito a V_{in} = 230 V, carico 100%⁽³⁾ Pout > 25 W**Light output level in DC operation: Factory default 100% EOfi=1****Livello di emissione luminosa in funzionamento DC: Impostazioni di fabbrica 100% EOfi=1****Features**

- Multipower driver supplied with dip-switch for the selection of the output current.
- IP20 independent driver, for indoor use (MP 65 H/2).
- Class I protection against electric shock for direct or indirect contact (MP 65 H/2).
- Driver for built-in use (MP 65 HBI).
- It can be used for lighting equipment in protection class I (MP 65 HBI).
- Active Power Factor Corrector.
- Auxiliary output 12 V max. 100 mA.
- Current regulation ±5 % including temperature variations.
- Input and output terminal blocks on the same side (wire cross-section up to 1,5 - 2,5 mm² / AWG15 - AWG13).
- Clamping screws on primary and secondary circuits for cables with diameter: min. 3 mm - max. 8 mm (MP 65 H/2).
- Driver can be secured with slot for screws.
- Protections:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Thermal protection = C.5.a.

Caratteristiche

- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- Alimentatore indipendente IP20, per uso interno (MP 65 H/2).
- Protetto in classe I contro le scosse elettriche per contatti diretti e indiretti (MP 65 H/2).
- Alimentatore da incorporare (MP 65 HBI).
- Utilizzabile per apparecchi di illuminazione in classe di protezione I (MP 65 HBI).
- PFC attivo.
- Uscita ausiliare 12 V max. 100 mA.
- Corrente regolata ±5 % incluse variazioni di temperatura.
- Morsetti di entrata e uscita sullo stesso lato (sezione cavo fino a 1,5 - 2,5 mm² / AWG15 - AWG13).
- Serracavo su primario e secondario per cavi di diametro: min. 3 mm - max. 8 mm (MP 65 H/2).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Protezione termica = C.5.a.


Accessories not supplied - Accessori non a corredo		
Article - Articolo	L (length)	Code - Codice
6-pin cable for LED and AUX Cavo 6 poli per LED e AUX	50 cm / 19,68"	425720017

Direct current electronic drivers with DIP-SWITCH
Alimentatori elettronici in corrente continua con DIP-SWITCH

Made in Italy


**IP 20****SCREW
FIXING**Ø90
3.54"

Weight - Peso gr. 235 / 8,3 oz.
 Pcs - Pezzi 35

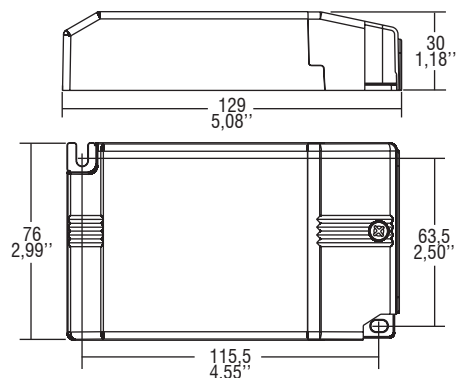
**BUILT-IN****SCREW
FIXING**

Weight - Peso gr. 225 / 8 oz.
 Pcs - Pezzi 40

Compatible with ZHAGA (AM2)

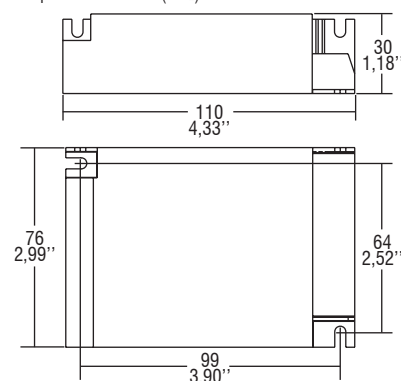

Wiring diagram - Schema di collegamento (Max. LED distance on page info8 - Massima distanza LED a pagina info8)

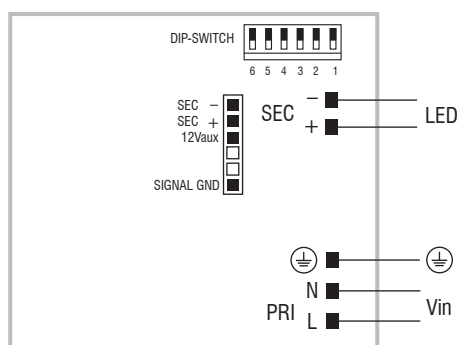

Multipower drivers - Compact case - Switchable
 Alimentatori multipotenza - Formato compatto - Non regolabili

2.1