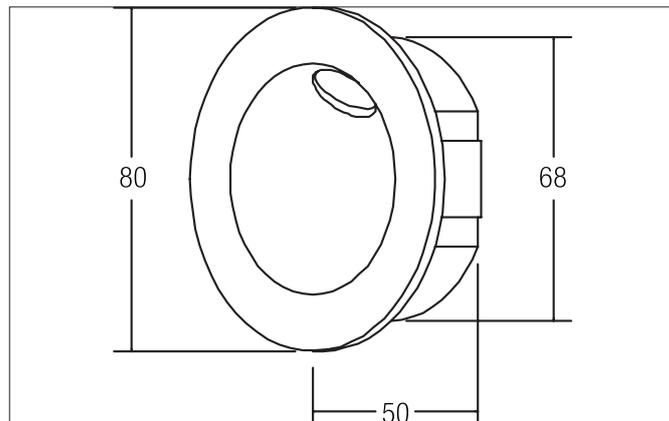


LED wall recessed light, IP54

Artikel-Nr. 10057173

Licht.
Für Generationen.**Tender**

LED wall recessed light, IP54, white, round. Recessed mounting, Wall-mounted. For installation in cavity walls using leaf springs. Delivery includes plaster housing (W 70 x H 70 x D 50 mm) and plaster sheet (100 x 100 mm). Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Wall-mounted, Material: Aluminium / Steel / Glass, Degree of protection: according to DIN EN 60529 IP54, Protection class: (EN 61140) III, Current: 700 mA, Power: 2W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 160lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 90°, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	10057173
GTIN	4250047781486
Kurzbeschreibung	LED wall recessed light, IP54
Material	Aluminium / Steel / Glass
Colour	White
Shape	round
Outer diameter	80 mm
Built-in diameter	68 mm
Installation depth	50 mm
weight	0.310 kg

LED wall recessed light, IP54

Artikel-Nr. 10057173

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Luminous flux	160 lm
System efficiency	80 lm/W
Colour rendering	CRI > 80
Reflector	Without
Beam angle	90 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	2 W
Voltage type	DC
Current	700 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP54
Converter - possible luminaire 1 pc.	17723 17748
Control	Dimming depending on driver
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Material cover	Glass transparent

Packing data	
Gross weight	0.363 kg
Length of packaging	110 mm
Packaging width	110 mm
Packaging height	80 mm

Accessories	
	<p>Artikel-Nr.: 17723020 Kurzbeschreibung: LED converter 700 mA, on/off Leistung: 1,4 - 31 W Abmessung: 146.5 mm x 43.5 mm x 30 mm</p>
	<p>Artikel-Nr.: 17748020 Kurzbeschreibung: LED converter 700 mA, trailing-edge phase dimmable Leistung: 1,4 - 32 W Abmessung: 166 mm x 46 mm x 34 mm</p>