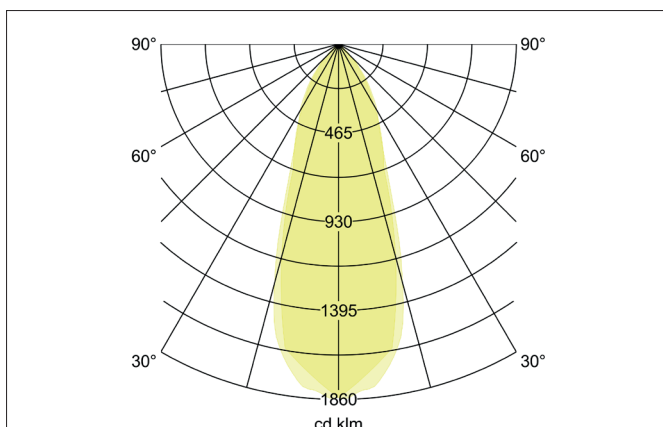
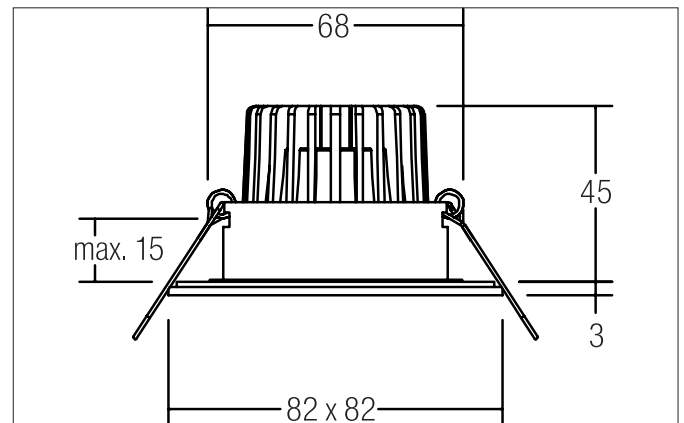


BB16 LED recessed spot set BB16, phase dimmable incl. connection box

Artikel-Nr. 39476423

Licht.
Für Generationen.**Tender**

LED recessed spot set BB16, phase dimmable incl. connection box, stainless steel, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Stainless steel, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: Trailing-edge phase.

Article data	
Artikel-Nr.	39476423
GTIN	4251433936107
Series name	BB16
Kurzbeschreibung	LED recessed spot set BB16, phase dimmable incl. connection box
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Shape	square
Built-in diameter	68 mm
Installation depth	36 mm
Length	82 mm
Width	82 mm
weight	0.346 kg

BB16 LED recessed spot set BB16, phase dimmable incl. connection box

Artikel-Nr. 39476423

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	680 lm
System efficiency	113 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP54
Schutzart deckenseitig	IP20
Control	Trailing-edge phase
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Protection class	II
Degree of protection	IP54
Control	Trailing-edge phase

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	V4A No cover with thermal insulation material

Packing data	
Gross weight	0.408 kg
Length of packaging	100 mm
Packaging width	100 mm
Packaging height	100 mm