
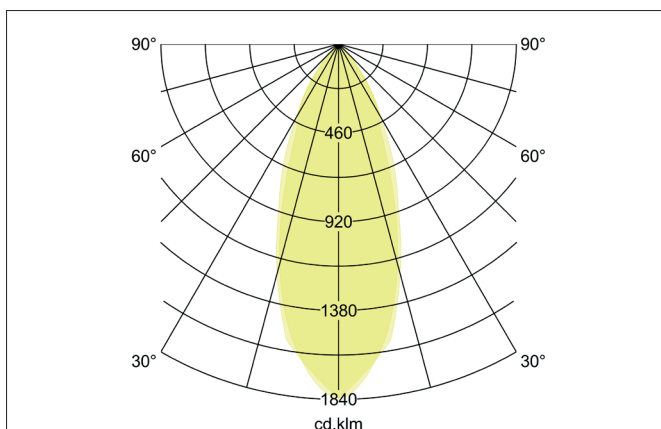


BB16 LED recessed downlight set BB16, V4A, IP54, phase dimmable (round converter)
 Artikel-Nr. 40376423

Licht.
Für Generationen.

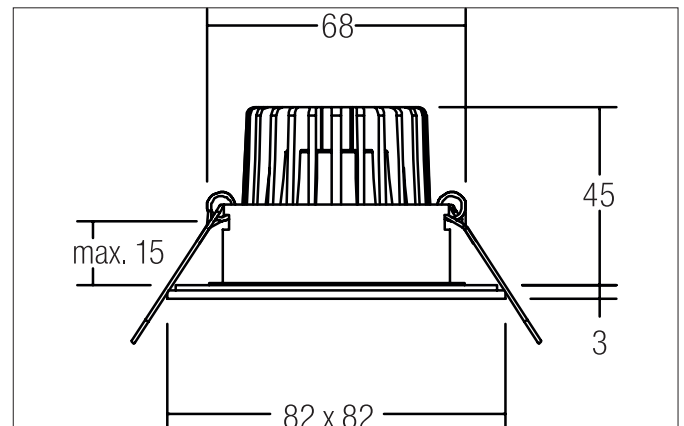

Tender

LED recessed downlight set BB16, V4A, IP54, phase dimmable (round converter), stainless steel, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a round converter for 230-V mains voltage, trailing-edge phase, dimensions of converter: D 51 x H 24 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material:, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) II, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: Trailing-edge phase.

Article data	
Artikel-Nr.	40376423
GTIN	4251433916956
Series name	BB16
Kurzbeschreibung	LED recessed downlight set BB16, V4A, IP54, phase dimmable (round converter)
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Type of surface	Matt
Shape	square
Built-in diameter	68 mm
Installation depth	45 mm
Length	82 mm
Width	82 mm
weight	0.292 kg

BB16 LED recessed downlight set BB16, V4A, IP54, phase dimmable (round converter)
 Artikel-Nr. 40376423

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	680 lm
System efficiency	113 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP54
Schutzart deckenseitig	IP20
Control	Trailing-edge phase
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Protection class	II
Degree of protection	IP54
Control	Trailing-edge phase

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	V4A No cover with thermal insulation material

Packing data	
Gross weight	0.332 kg
Length of packaging	95 mm
Packaging width	75 mm
Packaging height	95 mm