
Sensor-switched LED indoor light - Professional Line



Emergency light - neutral white EAN 4007841 058579 Article number 058579







Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect switched indoor light . The emergency-light version of the RS PRO P2 S integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and unbeatable efficiency. As many as ten lights can be interconnected by cable. Output: 15,4 W with 1731 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	320 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	15,4 W
Interconnection	Yes
Lichtstrom Gesamtprodukt	1731 lm
Luminous flux, emergency light	38 lm
Gesamtprodukt Effizienz	112 lm/W
Colour temperature	4000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °

Yes
No
2 – 2000 lx
5 s – 15 Min.
Yes
10/30 min, all night
Emergency light in compliance with EN 60598-2-22 for 3h
Yes
IK03
IP54
II
-10 - 30 °C
Plastic
Plastic, opal
5 years
Emergency light - neutral white
4007841058579


Sensor-switched LED indoor light - Professional Line



Emergency light - neutral white EAN 4007841 058579 Article number 058579




Detection Zone




Mögliche Montagehöhe: 2,00 m – 4,00 m Orange: radial und tangential

Light Distribution Curve




15,4 W
Yes, STEINEL LED system
LED cannot be replaced
1731 lm
4000 K
80-89
50000 h
Passive Thermo Control

Dimension Drawing

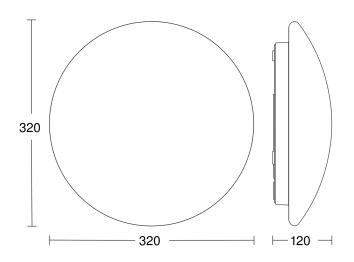

Slave/wireless master interconnection circuit diagram



Sensor-switched LED indoor light - Professional Line



Emergency light - neutral white EAN 4007841 058579 Article number 058579



Master/master interconnection circuit diagram

