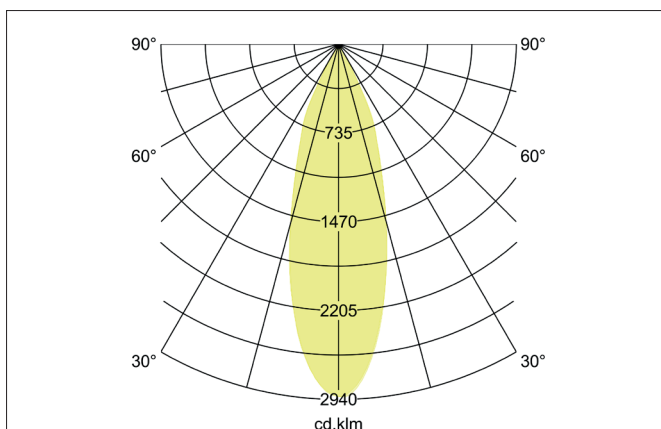
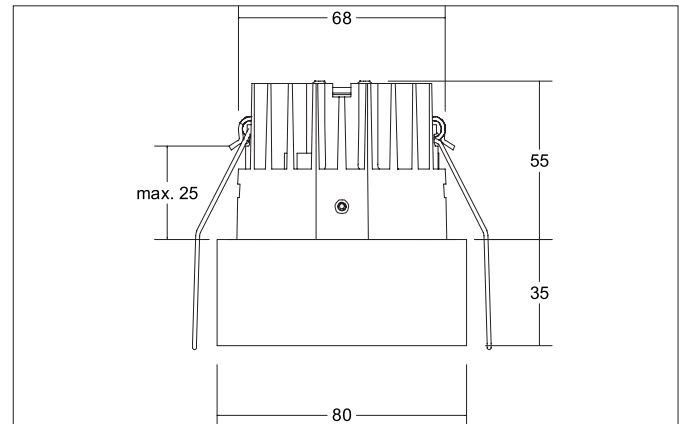


IMPLEMENT LED recessed downlight

Artikel-Nr. 12391173

Licht.
Für Generationen.**Tender**

LED recessed downlight, white, round. In a compact design, for installation in tool-less rapid assembly systems Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 500 mA, Power: 8.9W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 730lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 37°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	12391173
GTIN	4251433925781
Series name	IMPLEMENT
Kurzbeschreibung	LED recessed downlight
Material	Aluminium / Plastic
Colour	White
Shape	round
Outer diameter	80 mm
Built-in diameter	68 mm
Installation depth	55 mm
weight	0.250 kg

IMPLEMENT LED recessed downlight

Artikel-Nr. 12391173

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	730 lm
System efficiency	82 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	37 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	8.9 W
Voltage type	DC
Current	500 mA
Lamp	LED
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17823 17824 17826 17829 17822
Control	Dimming depending on driver
Leuchtmittelwechsel möglich	ja
Rated life time L70/B50 at 25 °C	50000 h

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent

Packing data	
Gross weight	0.334 kg
Length of packaging	120 mm
Packaging width	120 mm
Packaging height	110 mm

IMPLEMENT LED recessed downlight

Artikel-Nr. 12391173

Licht.
Für Generationen.

Accessories	
	Artikel-Nr.: 81091170 Kurzbeschreibung: Installation ring for installation IMPLEMENT Abmessung:
	Artikel-Nr.: 17823010 Kurzbeschreibung: LED converter 500 mA, on/off Leistung: 1 - 22 W Abmessung: 146.5 mm x 43.5 mm x 30 mm
	Artikel-Nr.: 17824010 Kurzbeschreibung: LED converter 500 mA, 1-10V dimmable (analog) Leistung: 5 - 27 W Abmessung: 146.5 mm x 43.5 mm x 30 mm
	Artikel-Nr.: 17826010 Kurzbeschreibung: LED converter 500 mA, DALI dimmable (digital) Leistung: 5 - 27 W Abmessung: 146.5 mm x 44 mm x 30 mm
	Artikel-Nr.: 17829010 Kurzbeschreibung: LED converter 500 mA, trailing-edge phase dimmable Leistung: 1 - 24 W Abmessung: 166 mm x 46 mm x 34 mm
	Artikel-Nr.: 17822010 Kurzbeschreibung: LED converter 500 mA, trailing-edge phase dimmable Leistung: 8 - 20 W Abmessung: 110.5 mm x 52 mm x 22 mm