


busDOT lite

DALI Bus Power Supply
Power supply for the DALI bus

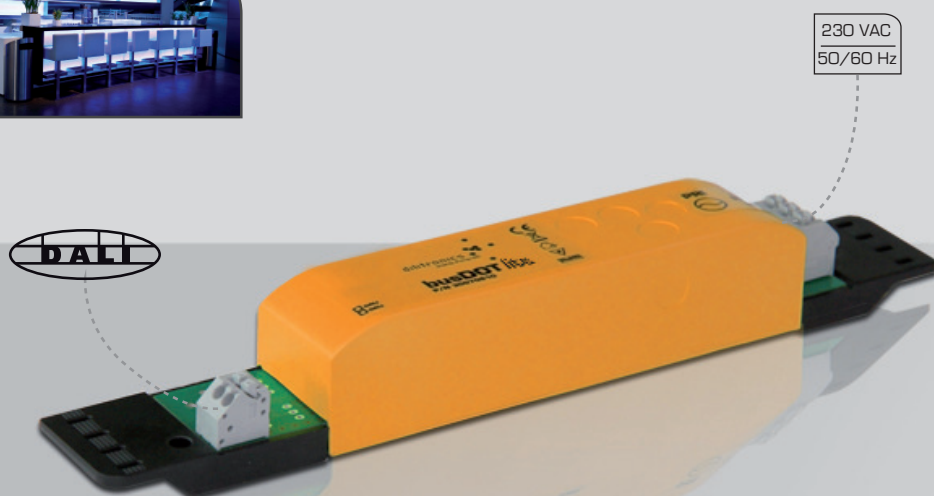

Function:

busDOT lite provides the central power supply for the DALI bus. A power supply of up to 125 mA is supported. The module can operate numerous DALI EBs (power consumption of 2 mA typ.), e.g. driveDOT 4, as well as DALI control devices (power consumption of 6 mA typ.), e.g. switchDOT.

Installation:

The installation of the busDOT lite is not subject to the safety extra-low voltage regulations (SELV). Therefore, the installation regulations for low voltage are applicable.

DALI bus power supply



User-friendly



Indoor use



Eco-friendly



Why busDOT lite

DALI power supply
Typical bus / output current 125 mA
For surface-mounting / ceiling inserted device


Specification

Specification	
Rated supply voltage	230 VAC
Input current	max. 50 mA
Mains frequency	50/60 Hz
Output	DALI
Max. output current	125 mA
Ambient temperature	0...40 ° C
IP protection	IP 20
Dimension	210 mm x 30 mm x 28 mm
Weight	76 g

Order information

Product	Order code
busDOT lite	30070809
Online order	shop.dilitronics.com

Dimension

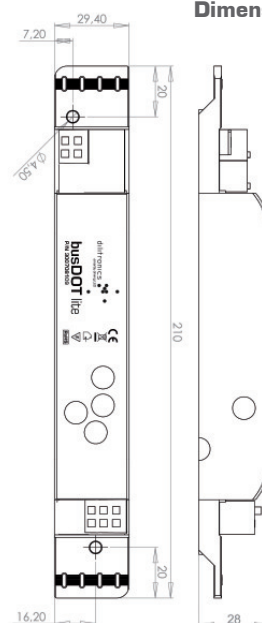

Connection



dilitronics GmbH

Felsbachstr. 5
07745 Jena, Germany
Phone +49 3641 875757-0
Fax +49 3641 875757-9
www.dilitronics.com
contact@dilitronics.com

