

# XLED PRO ONE Plus

Anthracite

EAN 4007841 069544

Article number 069544



<b>LED</b>	<b>3000 K</b>							<b>5 years</b>	<b>CE</b>
long life LED 50.000 h	3000K warm-white	IP44	Panel 180° vertical	indoor/outdoor light	networkable via cable	energy saving	plastic free packaging	manufacturer's warranty steinel-professional.de/garantie	CE

## Function description

Floodlights redefined. Housed in a sophisticated aluminium enclosure, the 180° vertically swivelling floodlight XLED PRO ONE Plus without sensor guarantees daylight-bright illumination across large areas with warm white 3000 K and at 33,1 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounting adapter. 5-year guarantee.

## Technical specifications

Dimensions (L x W x H)	202 x 259 x 226 mm	Basic light level function	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Main light adjustable	No
Output	33,1 W	Functions	Relay output
Interconnection	Yes	Impact resistance	IK03
Vernetzung via: Connect Bluetooth Mesh	Cable	IP-rating	IP44
Lichtstrom Gesamtprodukt	4370 lm	Protection class	I
Gesamtprodukt Effizienz	132 lm/W	Ambient temperature	-20 – 40 °C
Colour temperature	3000 K	Housing material	Aluminium
Colour variation LED	SDCM3	Cover material	Glass transparent
Colour Rendering Index	80-89	Manufacturer's Warranty	5 years
With lamp	Yes, STEINEL LED system	Installation site	ceiling, wall
Lamp	LED cannot be replaced	Cover material	shrouds
LED cooling system	Passive Thermo Control	Version	Anthracite
With motion detector	No	PU1, EAN	4007841069544
Photo-cell controller	No		

## Accessories

EAN 4007841 080983      Surface mount adapter XLED PRO ONE Plus + Max


# XLED PRO ONE Plus

Anthracite


EAN 4007841 069544

Article number 069544

## Dimension Drawing

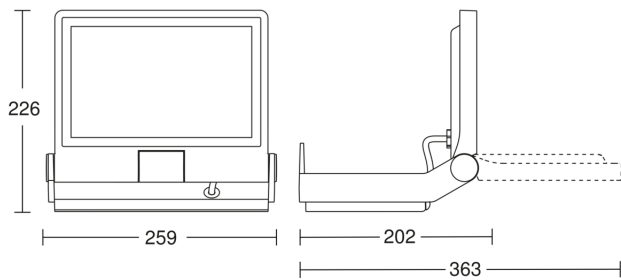

## Slave circuit diagram



## Master/slave interconnection circuit diagram

