

Alphabet of light Gople system

by
BIG - Bjarke Ingels Group



Artemide®

**alphabet of light
gople system**

Authors

BIG - Bjarke Ingels Group

BIG is a Copenhagen, New York, London and Barcelona based group of architects, designers, urbanists, landscape professionals, interior and product designers, researchers and inventors. The office is currently involved in a large number of projects throughout Europe, North America, Asia and Middle East.

BIG's architecture emerges out of a careful analysis of how contemporary life constantly evolves and changes. Not least due to the influence from multicultural exchange, global economical flows and communication technologies, that all together require new ways of architectural and urban organization. They believe that in order to deal with today's challenges, architecture can profitably move into a field that has been largely unexplored. A pragmatic utopian architecture that steers clear of the petrifying pragmatism of boring boxes and the naïve utopian ideas of digital formalism. Like a form of programmatic alchemy, they create architecture by mixing conventional ingredients such as living, leisure, working, parking and shopping. By hitting the fertile overlap between pragmatic and utopia, the architects once again find the freedom to change the surface of our planet, to better fit contemporary life forms.



Alphabet of light

BIG - Bjarke Ingels Group
2016

Alphabet of light system is a lighting language that continues to grow with new curved elements so it can be developed with increasing freedom throughout space. It is a basic principle that generates an open system implementing just a handful of basic modules.

Thanks to specific geometric proportions, these modules can be combined together to form endless lighting structures, from the most elemental to the most complex, both linear and curved. The BIG idea is combined with Artemide's optoelectronic expertise to give rise to an innovative construction principle that casts continuous and comfortable light.

It is a minimal presence that conceals ultra-sophisticated optoelectronic and patented mechanical innovation as well as ground-breaking control. The system can be controlled using the Artemide App to create freedom both in geometric design and in the definition of dynamic performance levels, which can be programmed or modified in real time. BIG designed a new font, an alphabet that can be used to write and express one's thoughts, to establish an identity and to guide visitors through a space using light. It can help give shape to a wide range of locations and public spaces, from hotels and offices to universities and hospitals.



**Artemide
App**




For further information on Alphabet of light
→ visit artemide.com










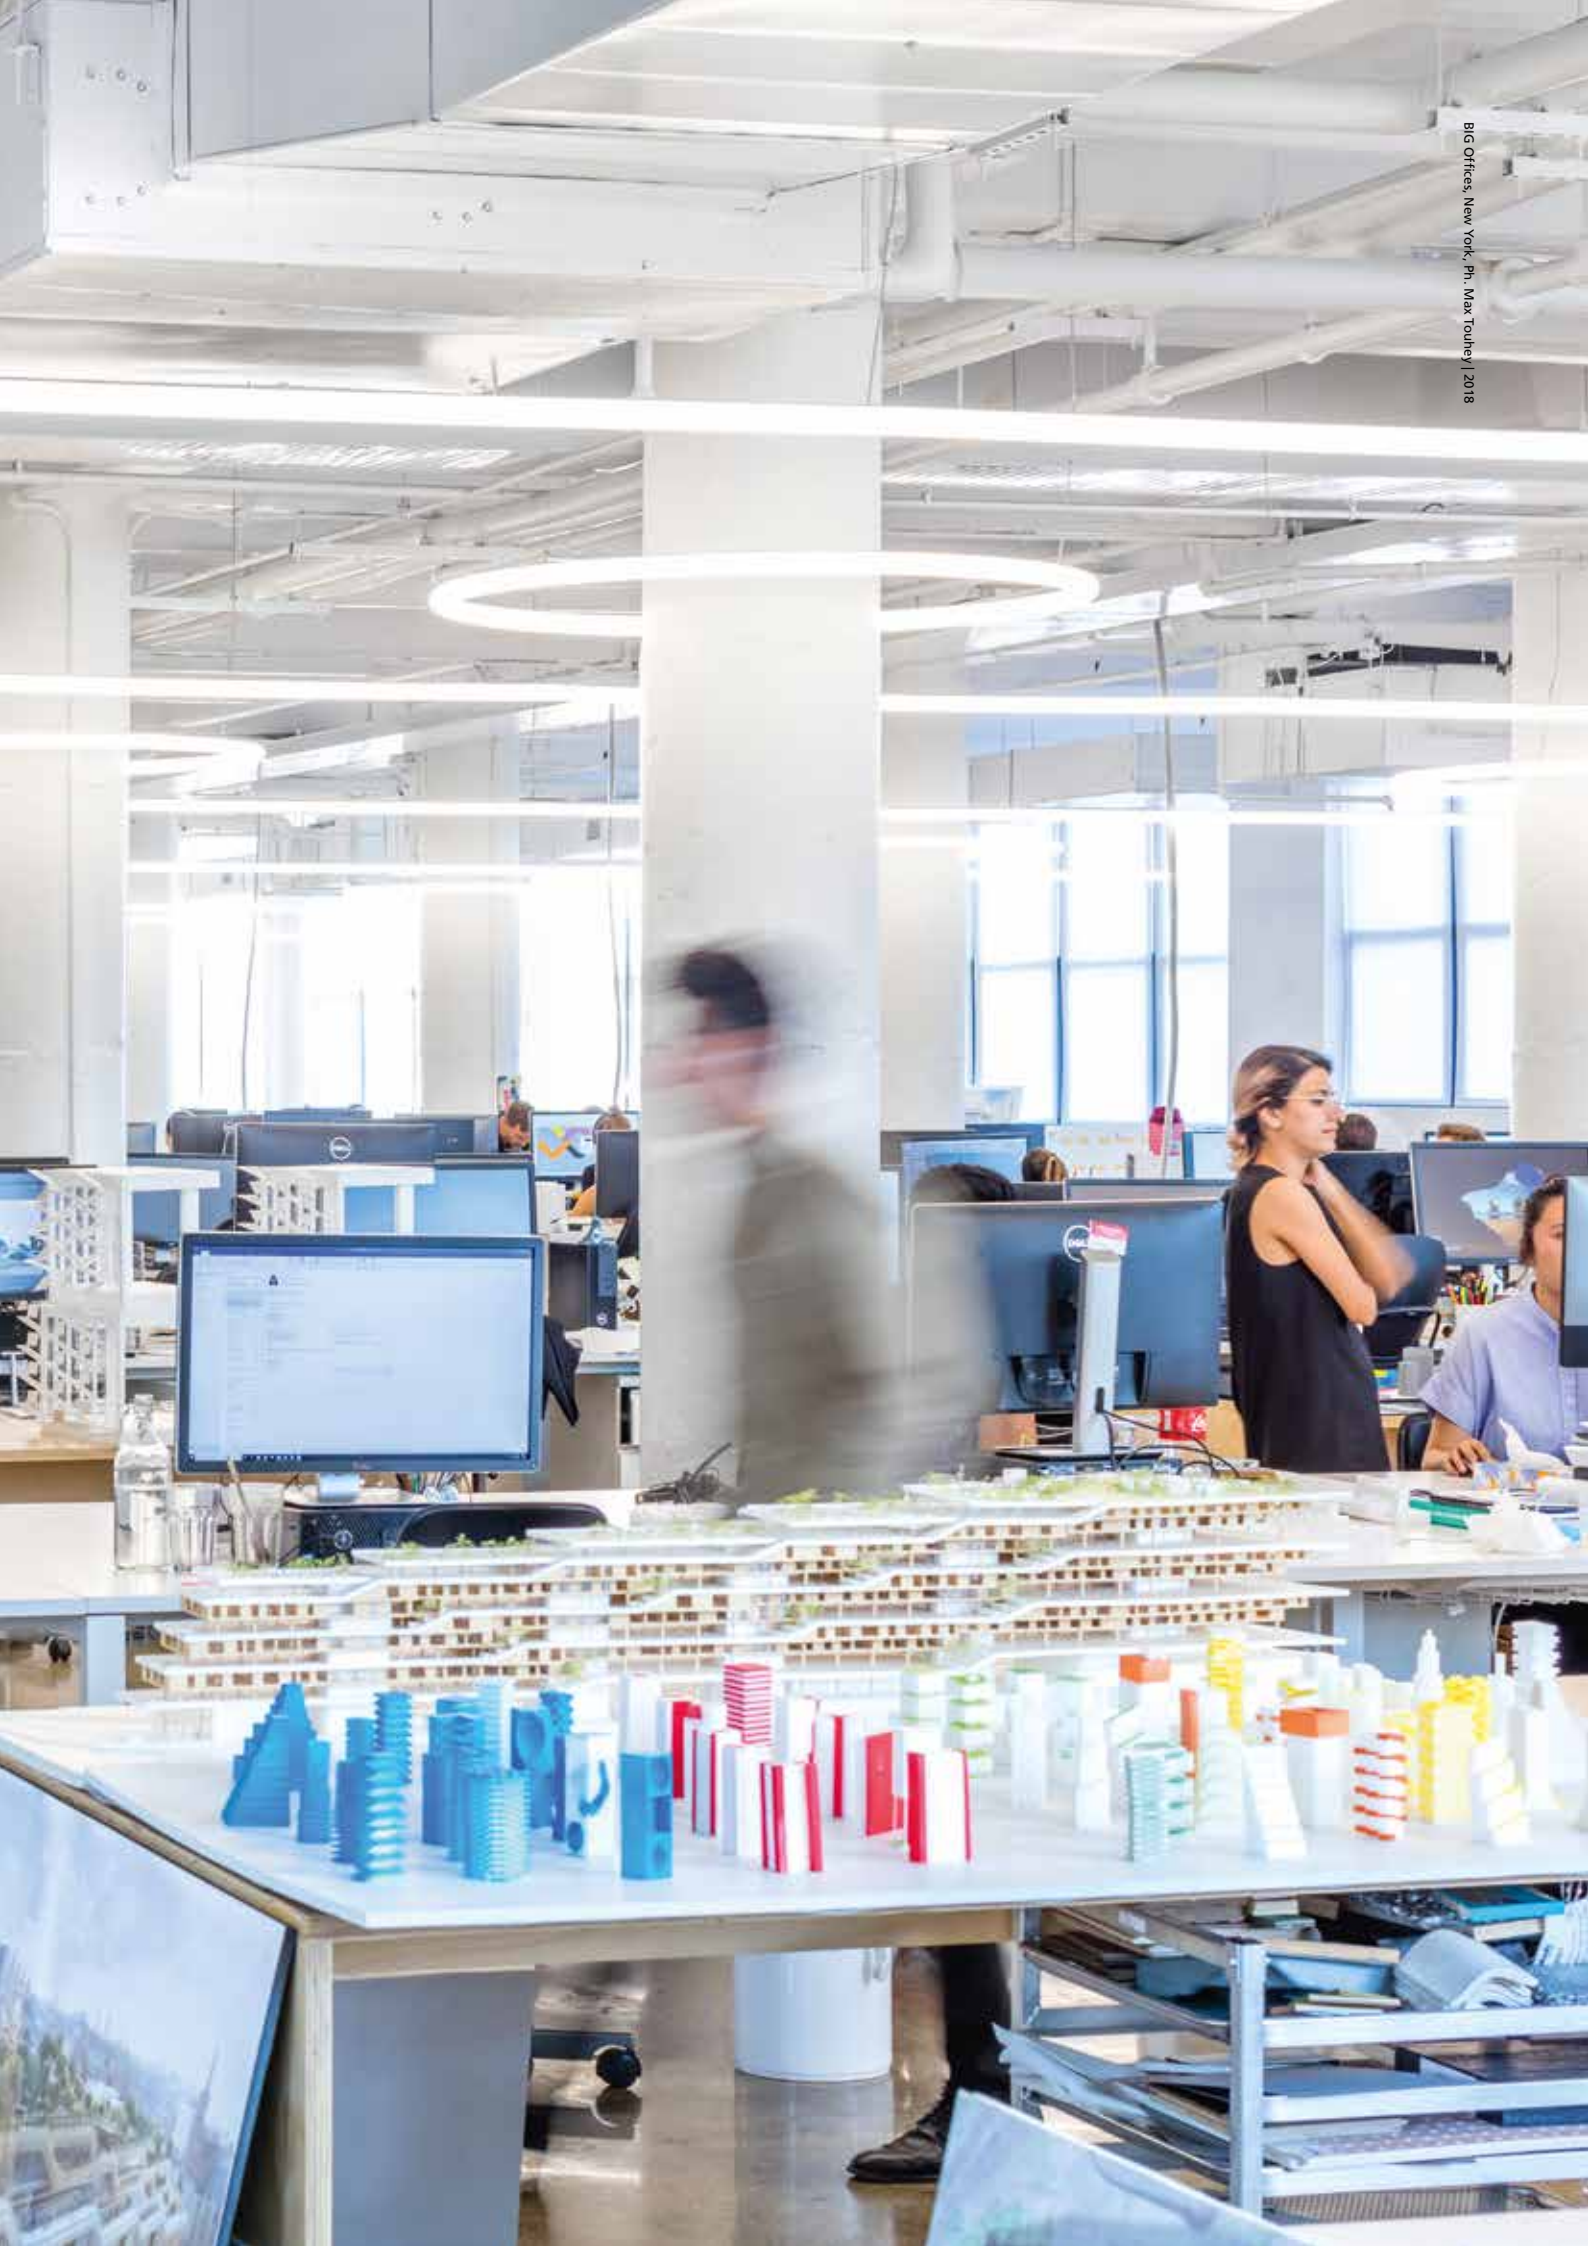

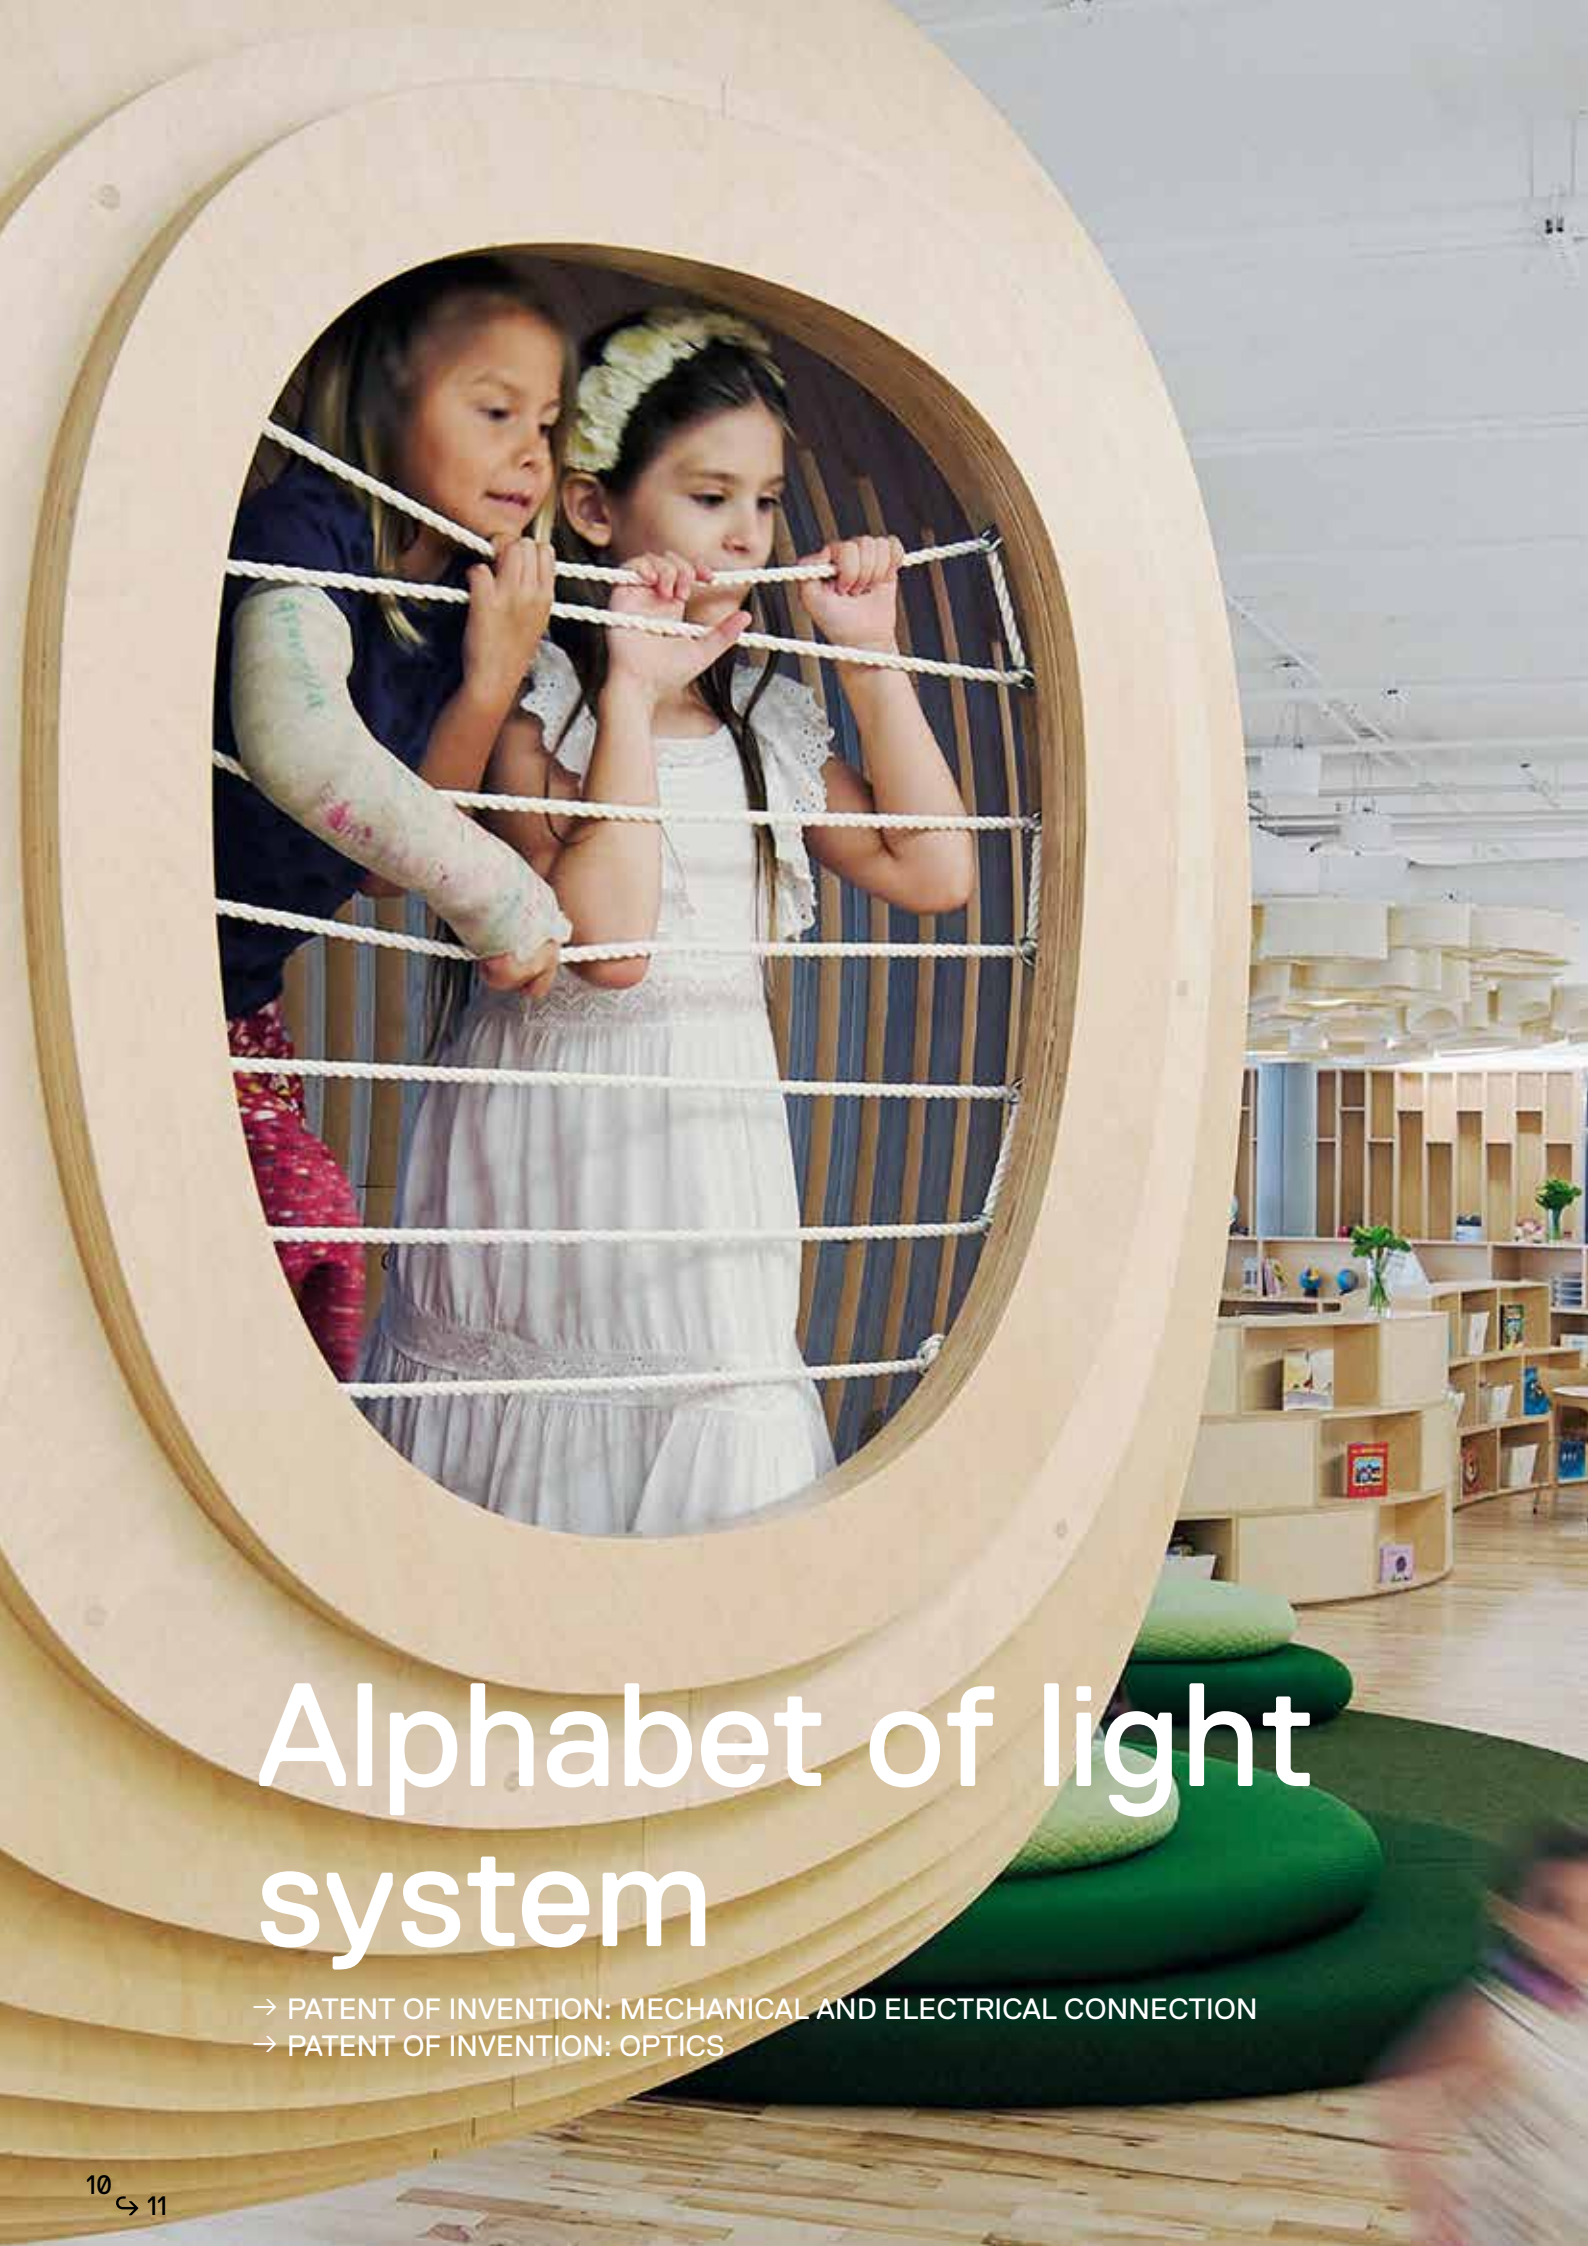

Alphabet of light system

- PATENT OF INVENTION: MECHANICAL AND ELECTRICAL CONNECTION
- PATENT OF INVENTION: OPTICS





IBM

IBM Studios
Milano

WELCOME








Huawei offices, project by Progetto CMR, Milan, Ph. Paolo Rionzi | 2019





Alphabet of light system configuration

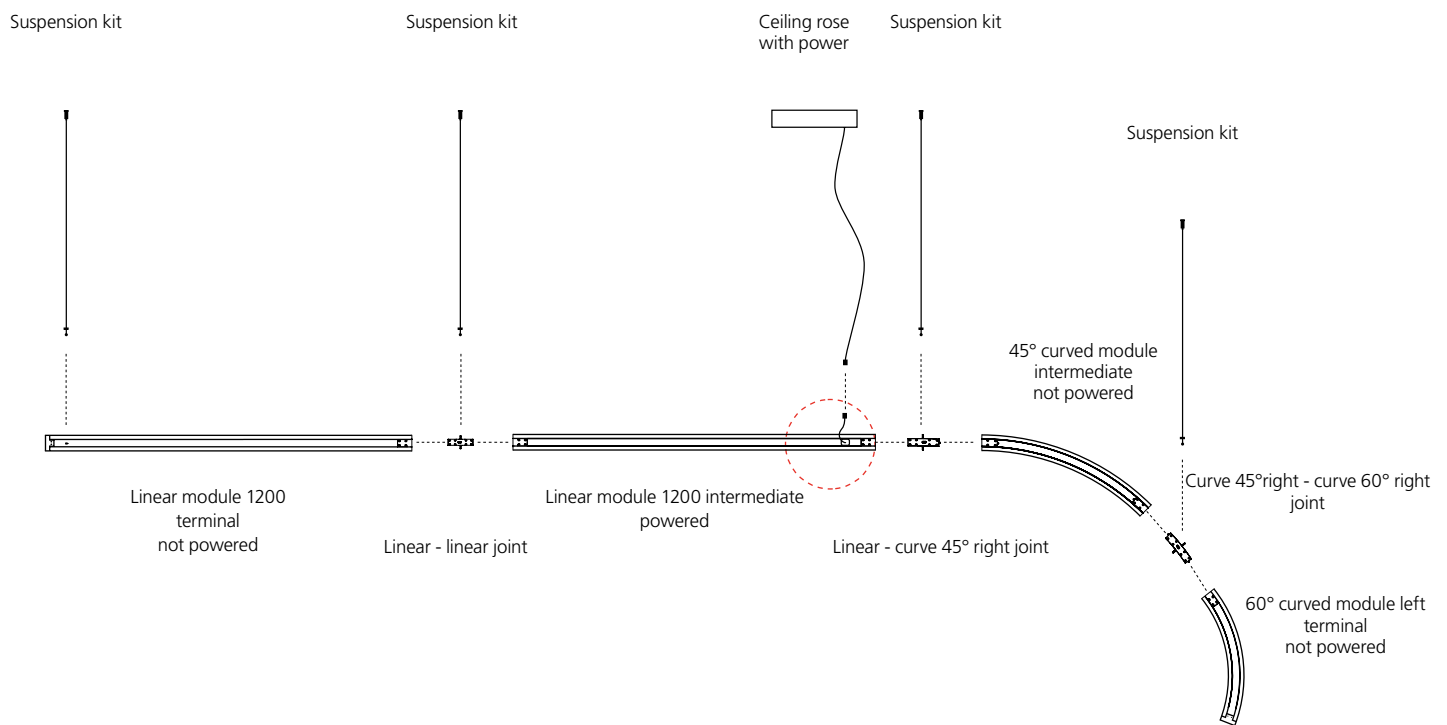

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA.

Linear module are available in three lengths: L 600 / 1200 / 1800 mm
Possibility to articulate the configuration on the horizontal plane with
45° and 60° curves and on the vertical plane with 90° curves.

Max 10 m for each power unit (10 m in one direction or $X+Y=10$ m in both directions).


Dali / 1-10 / Push or APP dimmable power units, recessed or ceiling mounted.

All modules powered by same power unit will use the same dimming.


Suspension modules

→ LINEAR ELEMENTS


600 terminal (588 mm)




600 intermediate (588 mm)




1200 terminal (1180 mm)




1200 intermediate (1180 mm)



1800 terminal (1772 mm)



1800 intermediate (1772 mm)




→ CURVED ELEMENTS


45° terminal right



45° terminal left

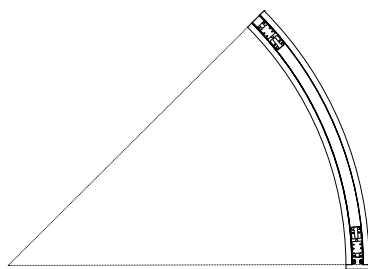


45° intermediate

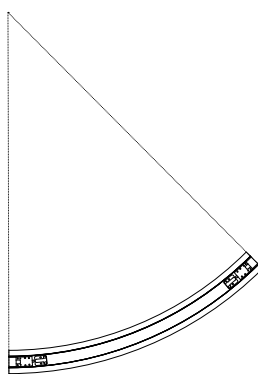


→ VERTICAL ELEMENTS


90° Vertical UP




60° terminal right




60° terminal left



60° intermediate



90° Vertical DOWN



↪ ALPHABET OF LIGHT - SYSTEM

Opal White



XF



MacAdam 3SDCM
Life L80 (12K) 72000h
CRI =80

IP20



SUSPENSION LINEAR ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Not powered Code
600 terminal	11 W	24V	977 lm	3000K 3500K	2100010A 2100C10A	2101010A 2101C10A
600 intermediate	11 W	24V	977 lm	3000K 3500K		2102010A 2102C10A
1200 terminal	21 W	24V	1934 lm	3000K 3500K	2104010A 2104C10A	2106010A 2106C10A
1200 intermediate	21 W	24V	1934 lm	3000K 3500K	2105010A 2105C10A	2107010A 2107C10A
1800 terminal	33 W	24V	2931 lm	3000K 3500K	2108010A 2108C10A	2110010A 2110C10A
1800 intermediate	33 W	24V	2931 lm	3000K 3500K	2109010A 2109C10A	2111010A 2111C10A

SUSPENSION CURVED ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Not powered Code
45° terminal left	11 W	24V	964 lm	3000K 3500K	2112010A 2112C10A	2115010A 2115C10A
45° terminal right	11 W	24V	964 lm	3000K 3500K	2113010A 2113C10A	2116010A 2116C10A
45° intermediate	11 W	24V	964 lm	3000K 3500K	2114010A 2114C10A	2117010A 2117C10A
60° terminal left	8 W	24V	691 lm	3000K 3500K	2118010A 2118C10A	2121010A 2121C10A
60° terminal right	8 W	24V	691 lm	3000K 3500K	2119010A 2119C10A	2122010A 2122C10A
60° intermediate	8 W	24V	691 lm	3000K 3500K	2120010A 2120C10A	2123010A 2123C10A

VERTICAL ELEMENTS

Length	W	V	Flux	CCT	Not powered Code
90° vertical UP	8 W	24V	636 lm	3000K 3500K	2124010A 2124C10A
90° vertical DOWN	8 W	24V	612 lm	3000K 3500K	2125010A 2125C10A

Suspension accessories	Code
Suspension kit L=1,50m	2266010A
Suspension kit L=4,00m	2273010A
*extension feeding cable L=1,25m	2274010A
*extension feeding cable L=2,50m	2275010A

*The total maximum length of the feeding cable is 4,00 m (either for ceiling mounted or remote power units).
Overpassing this value could affect uniformity of light emission.

Suspension Power Units

	Code
Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	2267010A
APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	2267010APP
Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	2272010A
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	2272010APP



Ø 160


Optional control devices - BLL wireless switch

	Code
 Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	DV1080APP


Wall/ceiling modules

→ LINEAR ELEMENTS


600 terminal (588 mm)




600 intermediate (588 mm)




1200 terminal (1180 mm)




1200 intermediate (1180 mm)



1800 terminal (1772 mm)



1800 intermediate (1772 mm)



→ CURVED ELEMENTS




45° terminal right



45° terminal left




45° intermediate

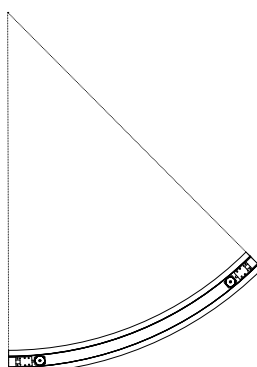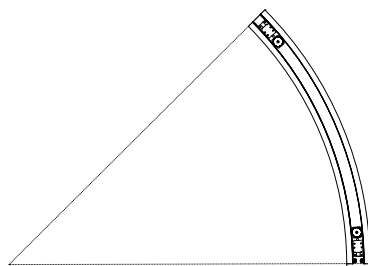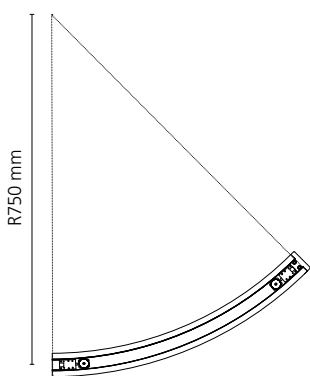


→ VERTICAL ELEMENTS

90° Vertical UP




60° terminal right







60° terminal left



60° intermediate



90° Vertical DOWN



↪ ALPHABET OF LIGHT - SYSTEM

Opal White



XF



MacAdam 3SDCM
Life L80 (12K) 72000h
CRI =80

IP20



WALL/CEILING LINEAR ELEMENTS

Length	W	V	Flux	CCT	Powered Code	Semi-recessed powered Code	Not powered Code
600 terminal	11 W	24V	977 lm	3000K 3500K	2130010A 2130C10A	2160010A 2160C10A	2131010A 2131C10A 2132010A 2132C10A
600 intermediate	11 W	24V	977 lm	3000K 3500K			
1200 terminal	21 W	24V	1934 lm	3000K 3500K	2134010A 2134C10A	2161010A 2161C10A	2136010A 2136C10A
1200 intermediate	21 W	24V	1934 lm	3000K 3500K	2135010A 2135C10A	2162010A 2162C10A	2137010A 2137C10A
1800 terminal	33 W	24V	2931 lm	3000K 3500K	2138010A 2138C10A	2163010A 2163C10A	2140010A 2140C10A
1800 intermediate	33 W	24V	2931 lm	3000K 3500K	2139010A 2139C10A	2164010A 2164C10A	2141010A 2141C10A

WALL/CEILING CURVED ELEMENTS

Length	W	V	Flux	CCT	Code	Code	Not powered Code
45° terminal left	11 W	24V	964 lm	3000K 3500K	2142010A 2142C10A	2165010A 2165C10A	2145010A 2145C10A
45° terminal right	11 W	24V	964 lm	3000K 3500K	2143010A 2143C10A	2166010A 2166C10A	2146010A 2146C10A
45° intermediate	11 W	24V	964 lm	3000K 3500K	2144010A 2144C10A	2167010A 2167C10A	2147010A 2147C10A
60° terminal left	8 W	24V	691 lm	3000K 3500K	2148010A 2148C10A	2168010A 2168C10A	2151010A 2151C10A
60° terminal right	8 W	24V	691 lm	3000K 3500K	2149010A 2149C10A	2169010A 2169C10A	2152010A 2152C10A
60° intermediate	8 W	24V	691 lm	3000K 3500K	2150010A 2150C10A	2170010A 2170C10A	2153010A 2153C10A

VERTICAL ELEMENTS

Length	W	V	Flux	CCT	Not powered Code
90° vertical UP	8 W	24V	636 lm	3000K 3500K	2124010A 2124C10A
90° vertical DOWN	8 W	24V	612 lm	3000K 3500K	2125010A 2125C10A

Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)

Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

Code

2268010A

2268010APP

2271010A

2271010APP



Ø 160

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.

Max N.3 inputs for external push buttons.

Max 1 m distance.

Mains power supply required.

To be installed inside flush mounting boxes or junction boxes.

Code

DV1080APP

X & T Joints

↪ ALPHABET OF LIGHT - X & T JOINTS

Opal White


XF

MacAdam 3SDCM
Life L80 (12K) 72000h
CRI =80

IP20


X JOINT SUSPENSION

Linear			Code	
	W	CCT		
X Joint	2,4 W	3000K	2158010A	
		3500K	2158C10A	




X JOINT CEILING

Linear			Code	
	W	CCT		
X Joint	2,4 W	3000K	2159010A	
		3500K	2159C10A	




T JOINT SUSPENSION

Linear			Code	
	W	CCT		
T Joint	2 W	3000K	2156010A	
		3500K	2156C10A	



T JOINT SUSPENSION

Linear			Code	
	W	CCT		
T Joint	2 W	3000K	2157010A	
		3500K	2157C10A	



90° angle



↪ ALPHABET OF LIGHT - 90° ANGLE

Opal White


XF

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20
⊕


SUSPENSION

Linear			Code	
	W	CCT		
90° angle	1,5 W	3000K	2154010A	
		3500K	2154C10A	



WALL/CEILING

Linear			Code	
	W	CCT		
90° angle	1,5 W	3000K	2155010A	
		3500K	2155C10A	



Joints

Zogenix, Emeryville, USA, ph. Emily Hagopian | 2020



↪ ALPHABET OF LIGHT - SYSTEM

Opal White



XF



MacAdam 3SDCM
Life L80 (12K) 72000h
CRI =80

IP20



JOINTS

Accessories	
Joint	Code
01 → Linear - linear joint ← Linear - linear joint	2250010A
02 → Linear - curve 45° right joint ← Curve 45° left - linear joint	2251010A
03 → Linear - curve 45° left joint ← Curve 45° right - linear joint	2252010A
04a → 45° curve right - 45° curve right joint ← 45° curve left - 45° curve left joint	2255010A
04b → 45° curve left - 45° curve left joint ← 45° curve right - 45° curve right joint	
05 → Linear - curve 60° right joint ← 60° curve left - linear joint	2253010A
06 → Linear - curve 60° left joint ← 60° curve right - linear joint	2254010A
07a → 60° curve right - 60° curve right joint ← 60° curve left - 60° curve left joint	2256010A
07b → 60° curve left - 60° curve left joint ← 60° curve right - 60° curve right joint	
08 → 60° curve right - 45° curve left joint ← 45° curve right - 60° curve left joint	2257010A
09 → 45° curve left - 45° curve right joint ← 45° curve left - 45° curve right joint	2260010A
10 → 60° curve right - 60° curve left joint ← 60° curve right - 60° curve left joint	2259010A
11 → 60° curve right - 45° curve right joint ← 45° curve left - 60° curve left joint	2261010A
12 → 60° curve left - 45° curve left joint ← 45° curve right - 60° curve right joint	2262010A
13 → 90° down - 90° up joint ← 90° up - 90° down joint	2263010A
14 → Linear - 90° vertical up joint ← 90° vertical up joint - linear joint	2264010A
15 → Linear - 90° vertical down joint ← 90° vertical down - linear joint	2265010A
16 → 60° curve left - 45° curve right joint ← 45° curve left - 60° curve right joint	2258010A
17 → 45° curve right - 45° curve left joint ← 45° curve right - 45° curve left joint	2269010A
18 → 60° curve left - 60° curve right joint ← 60° curve right - 60° curve left joint	2270010A

→ left to right path

← right to left path


→ left to right path
 ← right to left path




Code 2250010A_**JOINT 01**
 → LINEAR - LINEAR JOINT
 ← LINEAR - LINEAR JOINT




Code 2251010A_**JOINT 02**
 → LINEAR - CURVE 45° RIGHT JOINT
 ← CURVE 45° LEFT - LINEAR JOINT



Code 2252010A_**JOINT 03**
 → LINEAR - CURVE 45° LEFT JOINT
 ← CURVE 45° RIGHT - LINEAR JOINT



Code 2255010A_**JOINT 04a**
 → 45° CURVE RIGHT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 45° CURVE LEFT JOINT




Code 2255010A_**JOINT 04b**
 → 45° CURVE LEFT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 45° CURVE RIGHT JOINT




Code 2253010A_**JOINT 05**
 → LINEAR - CURVE 60° RIGHT JOINT
 ← 60° CURVE LEFT - LINEAR JOINT RIGHT




Code 2254010A_**JOINT 06**
 → LINEAR - CURVE 60° LEFT JOINT
 ← 60° CURVE RIGHT - LINEAR JOINT




Code 2256010A_**JOINT 07a**
 → 60° CURVE RIGHT - 60° CURVE RIGHT JOINT
 ← 60° CURVE LEFT - 60° CURVE LEFT JOINT




Code 2256010A_**JOINT 07b**
 → 60° CURVE LEFT - 60° CURVE LEFT JOINT
 ← 60° CURVE RIGHT - 60° CURVE RIGHT JOINT




Code 2257010A_**JOINT 08**
 → 60° CURVE RIGHT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 60° CURVE LEFT JOINT



Code 2258010A_**JOINT 16**
 → 60° CURVE LEFT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 60° CURVE RIGHT JOINT




Code 2259010A_ **JOINT 10**
 → 60° CURVE RIGHT - 60° CURVE LEFT JOINT
 ← 60° CURVE RIGHT - 60° CURVE LEFT JOINT




Code 2270010A_ **JOINT 18**
 → 60° CURVE LEFT - 60° CURVE RIGHT JOINT
 ← 60° CURVE LEFT - 60° CURVE RIGHT JOINT



Code 2261010A_ **JOINT 11**
 → 60° CURVE RIGHT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 60° CURVE LEFT JOINT



Code 2262010A_ **JOINT 12**
 → 60° CURVE LEFT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 60° CURVE RIGHT JOINT




Code 2263010A_ **JOINT 13**
 → 90° VERTICAL DOWN - 90° VERTICAL UP JOINT
 ← 90° VERTICAL UP - 90° VERTICAL DOWN JOINT




Code 2264010A_ **JOINT 14**
 → LINEAR - 90° VERTICAL UP JOINT
 ← 90° VERTICAL UP - LINEAR JOINT




Code 2265010A_ **JOINT 15**
 → LINEAR - 90° VERTICAL DOWN JOINT
 ← 90° VERTICAL DOWN - LINEAR JOINT



Code 2260010A_ **JOINT 09**
 → 45° CURVE LEFT - 45° CURVE RIGHT JOINT
 ← 45° CURVE LEFT - 45° CURVE RIGHT JOINT



Code 2269010A_ **JOINT 17**
 → 45° CURVE RIGHT - 45° CURVE LEFT JOINT
 ← 45° CURVE RIGHT - 45° CURVE LEFT JOINT

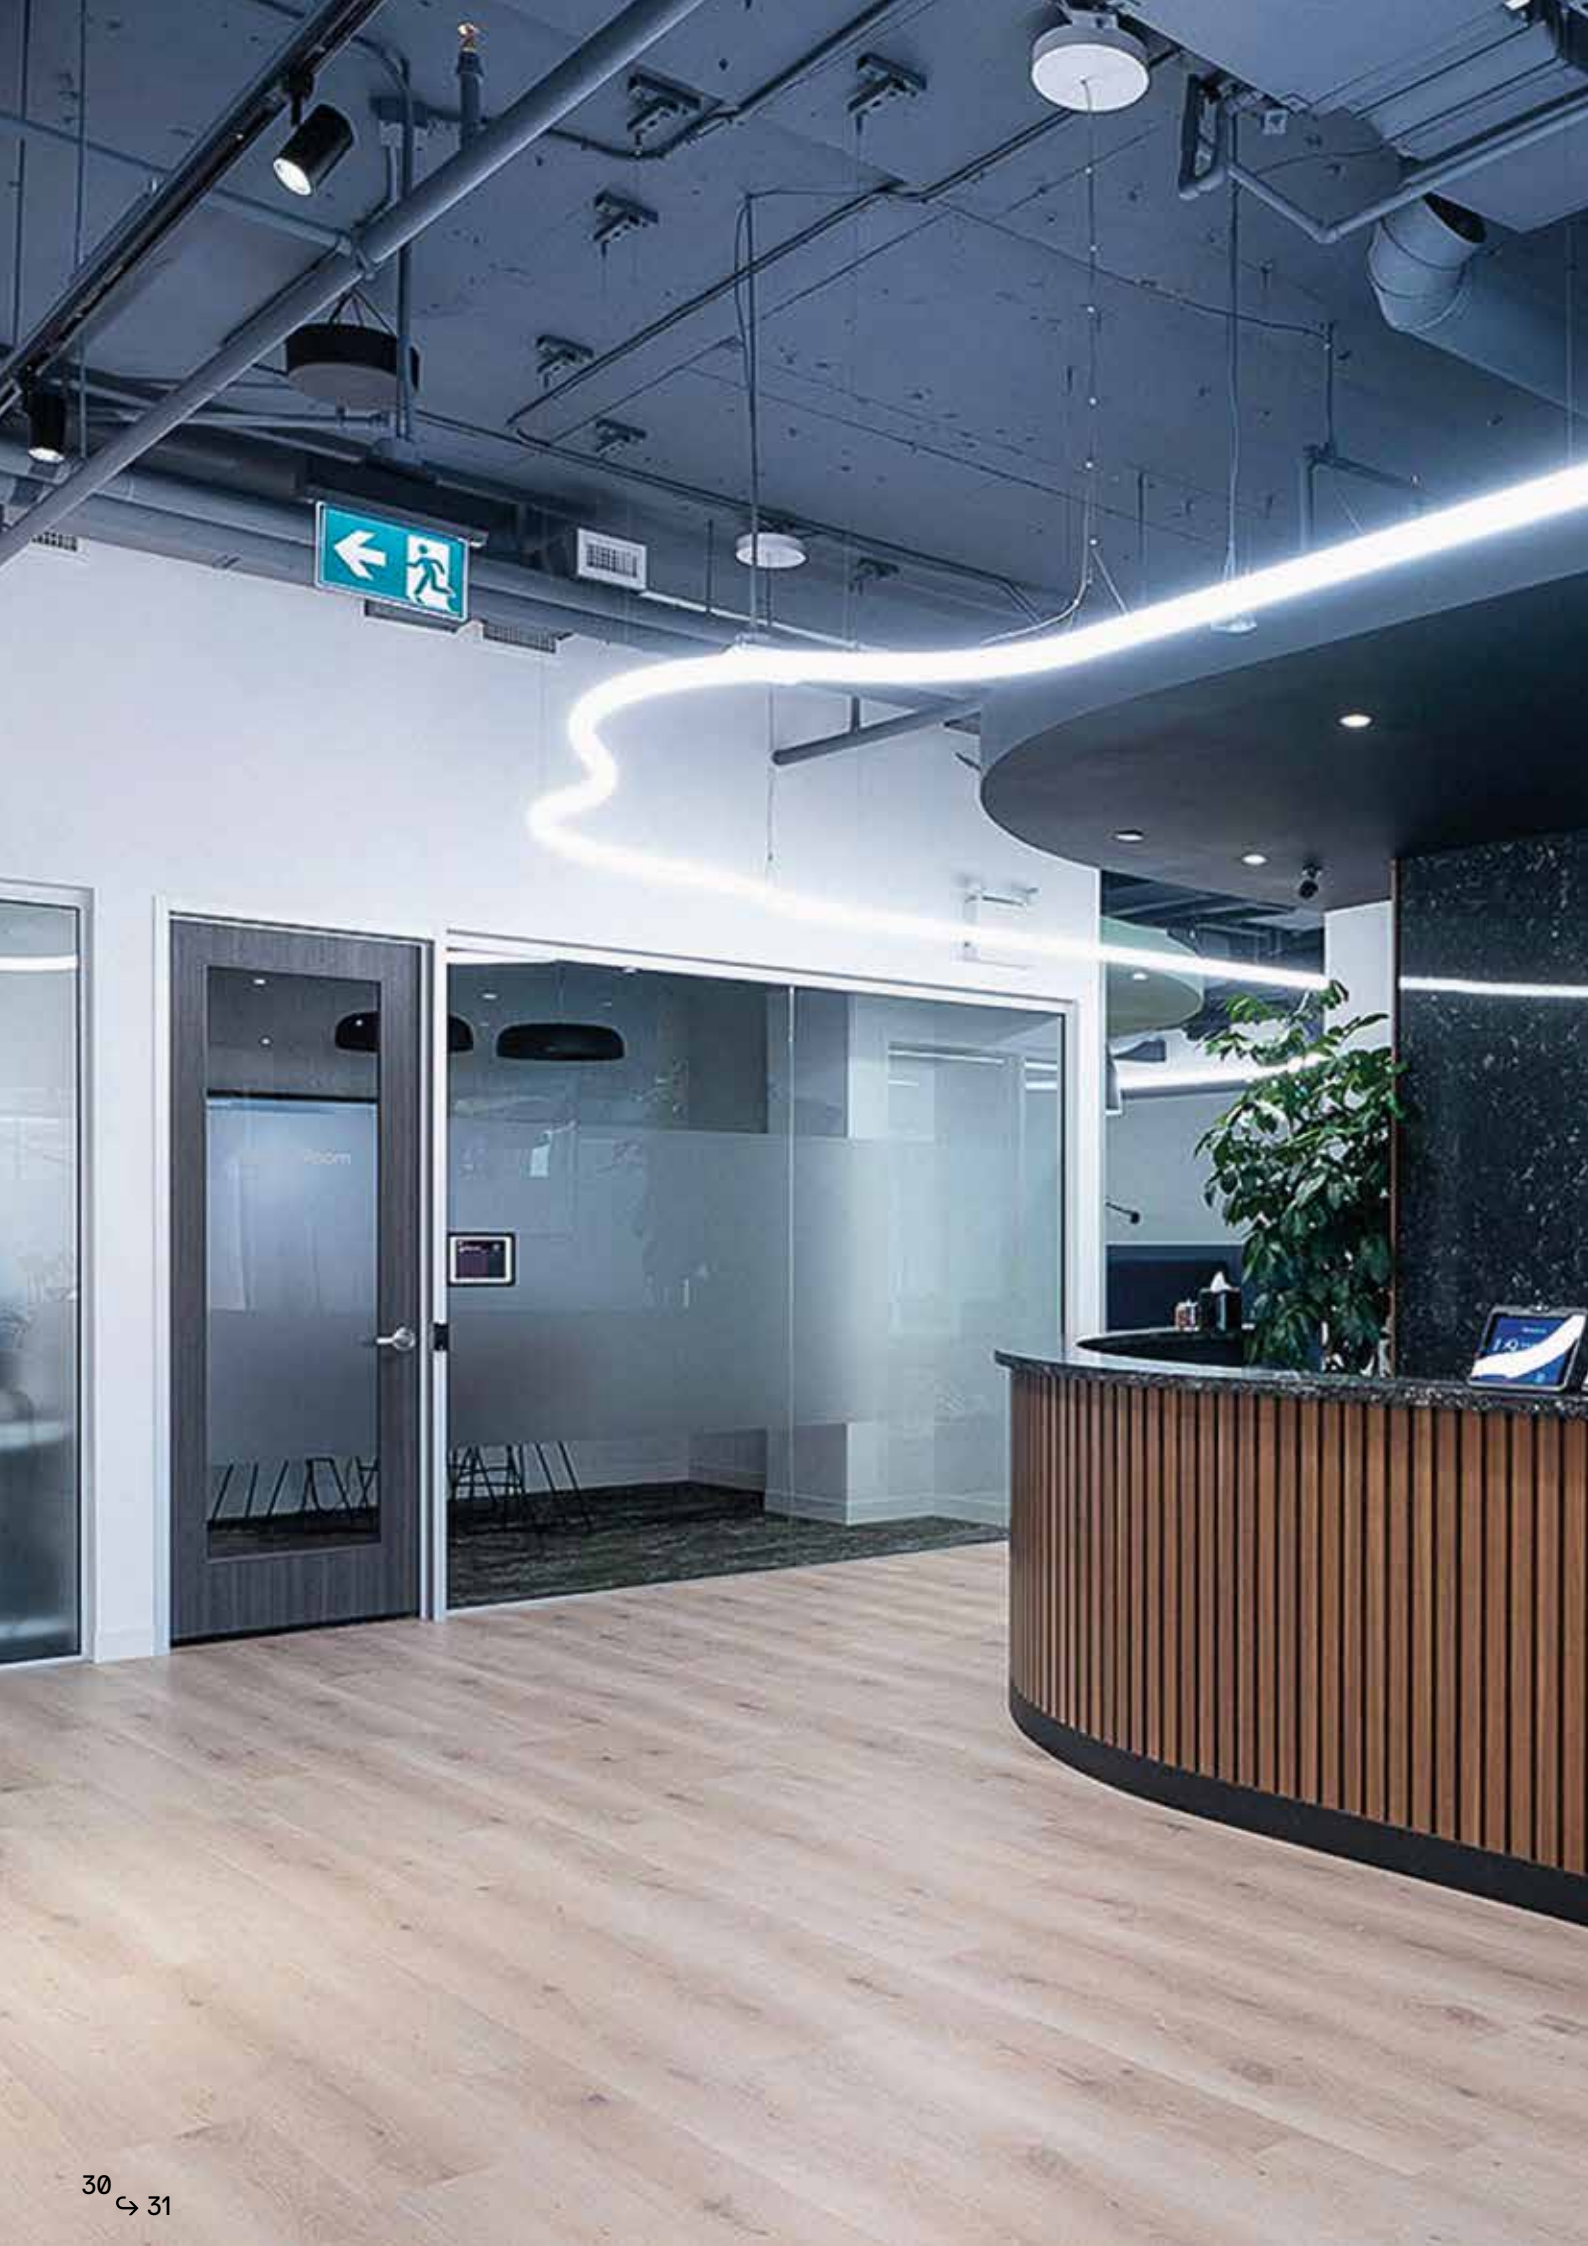



Alphabet of light Configurator


Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.

For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.


Alphabet of light system Configurator is a useful tool to simplify the design of your composition.

After defining the layout of the space, the desired system can be created by reconstructing it with a practical drag and drop of the various available modules. Once the project is completed, the system returns a complete datasheet with all the details to proceed with the order.


1. Build your space

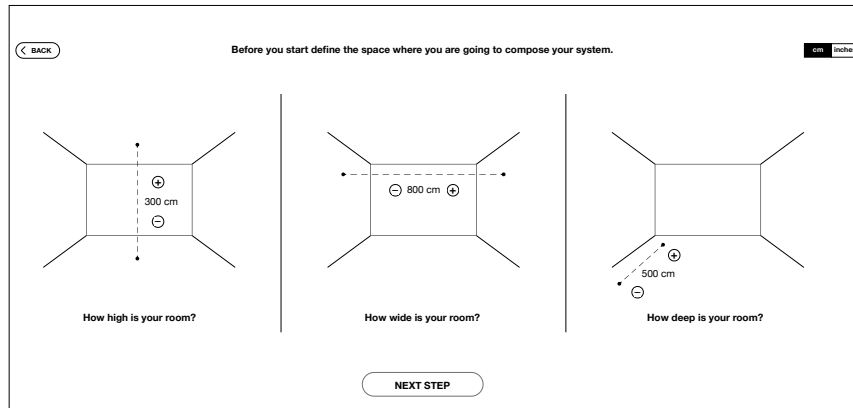

2. Drag and drop

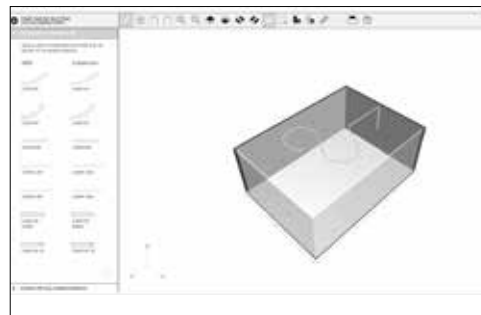

3. Save it and send it!

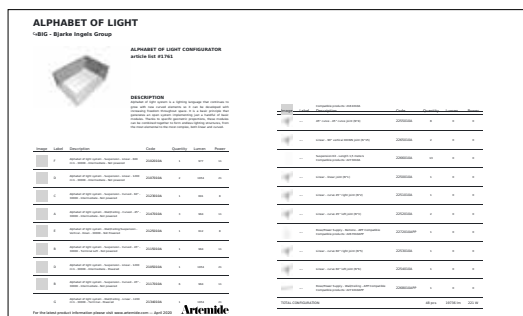

Gople system

BIG - Bjarke Ingles Group
2020

Gople system combines with the Alphabet of light system, creating a universal lighting able to meet the requirements of any space, but above all to define a new approach to lighting projects.

This is an increasingly universal language that diversifies its performance and expands the freedom to illuminate every angle.

Gople spot adds accent lights to break up the diffused light of Alphabet of light. Light thus follows spaces and activities not just by tracing geometries that move fluidly in three directions, but also through an alternation of light and shadow, the choice of light emissions that are diversified and specialised.


Alphabet of light is a versatile, multi-use project, perfect for illuminating any space, which in combination with Gople system opens up new fields of application and increasingly becomes the ideal tool for retail spaces.


Gople spot offers efficient performance, excellent colour rendering and numerous variables in terms of emission qualities such as colour temperature and beam angles, which make it a professional, technical product.



**Artemide
App**



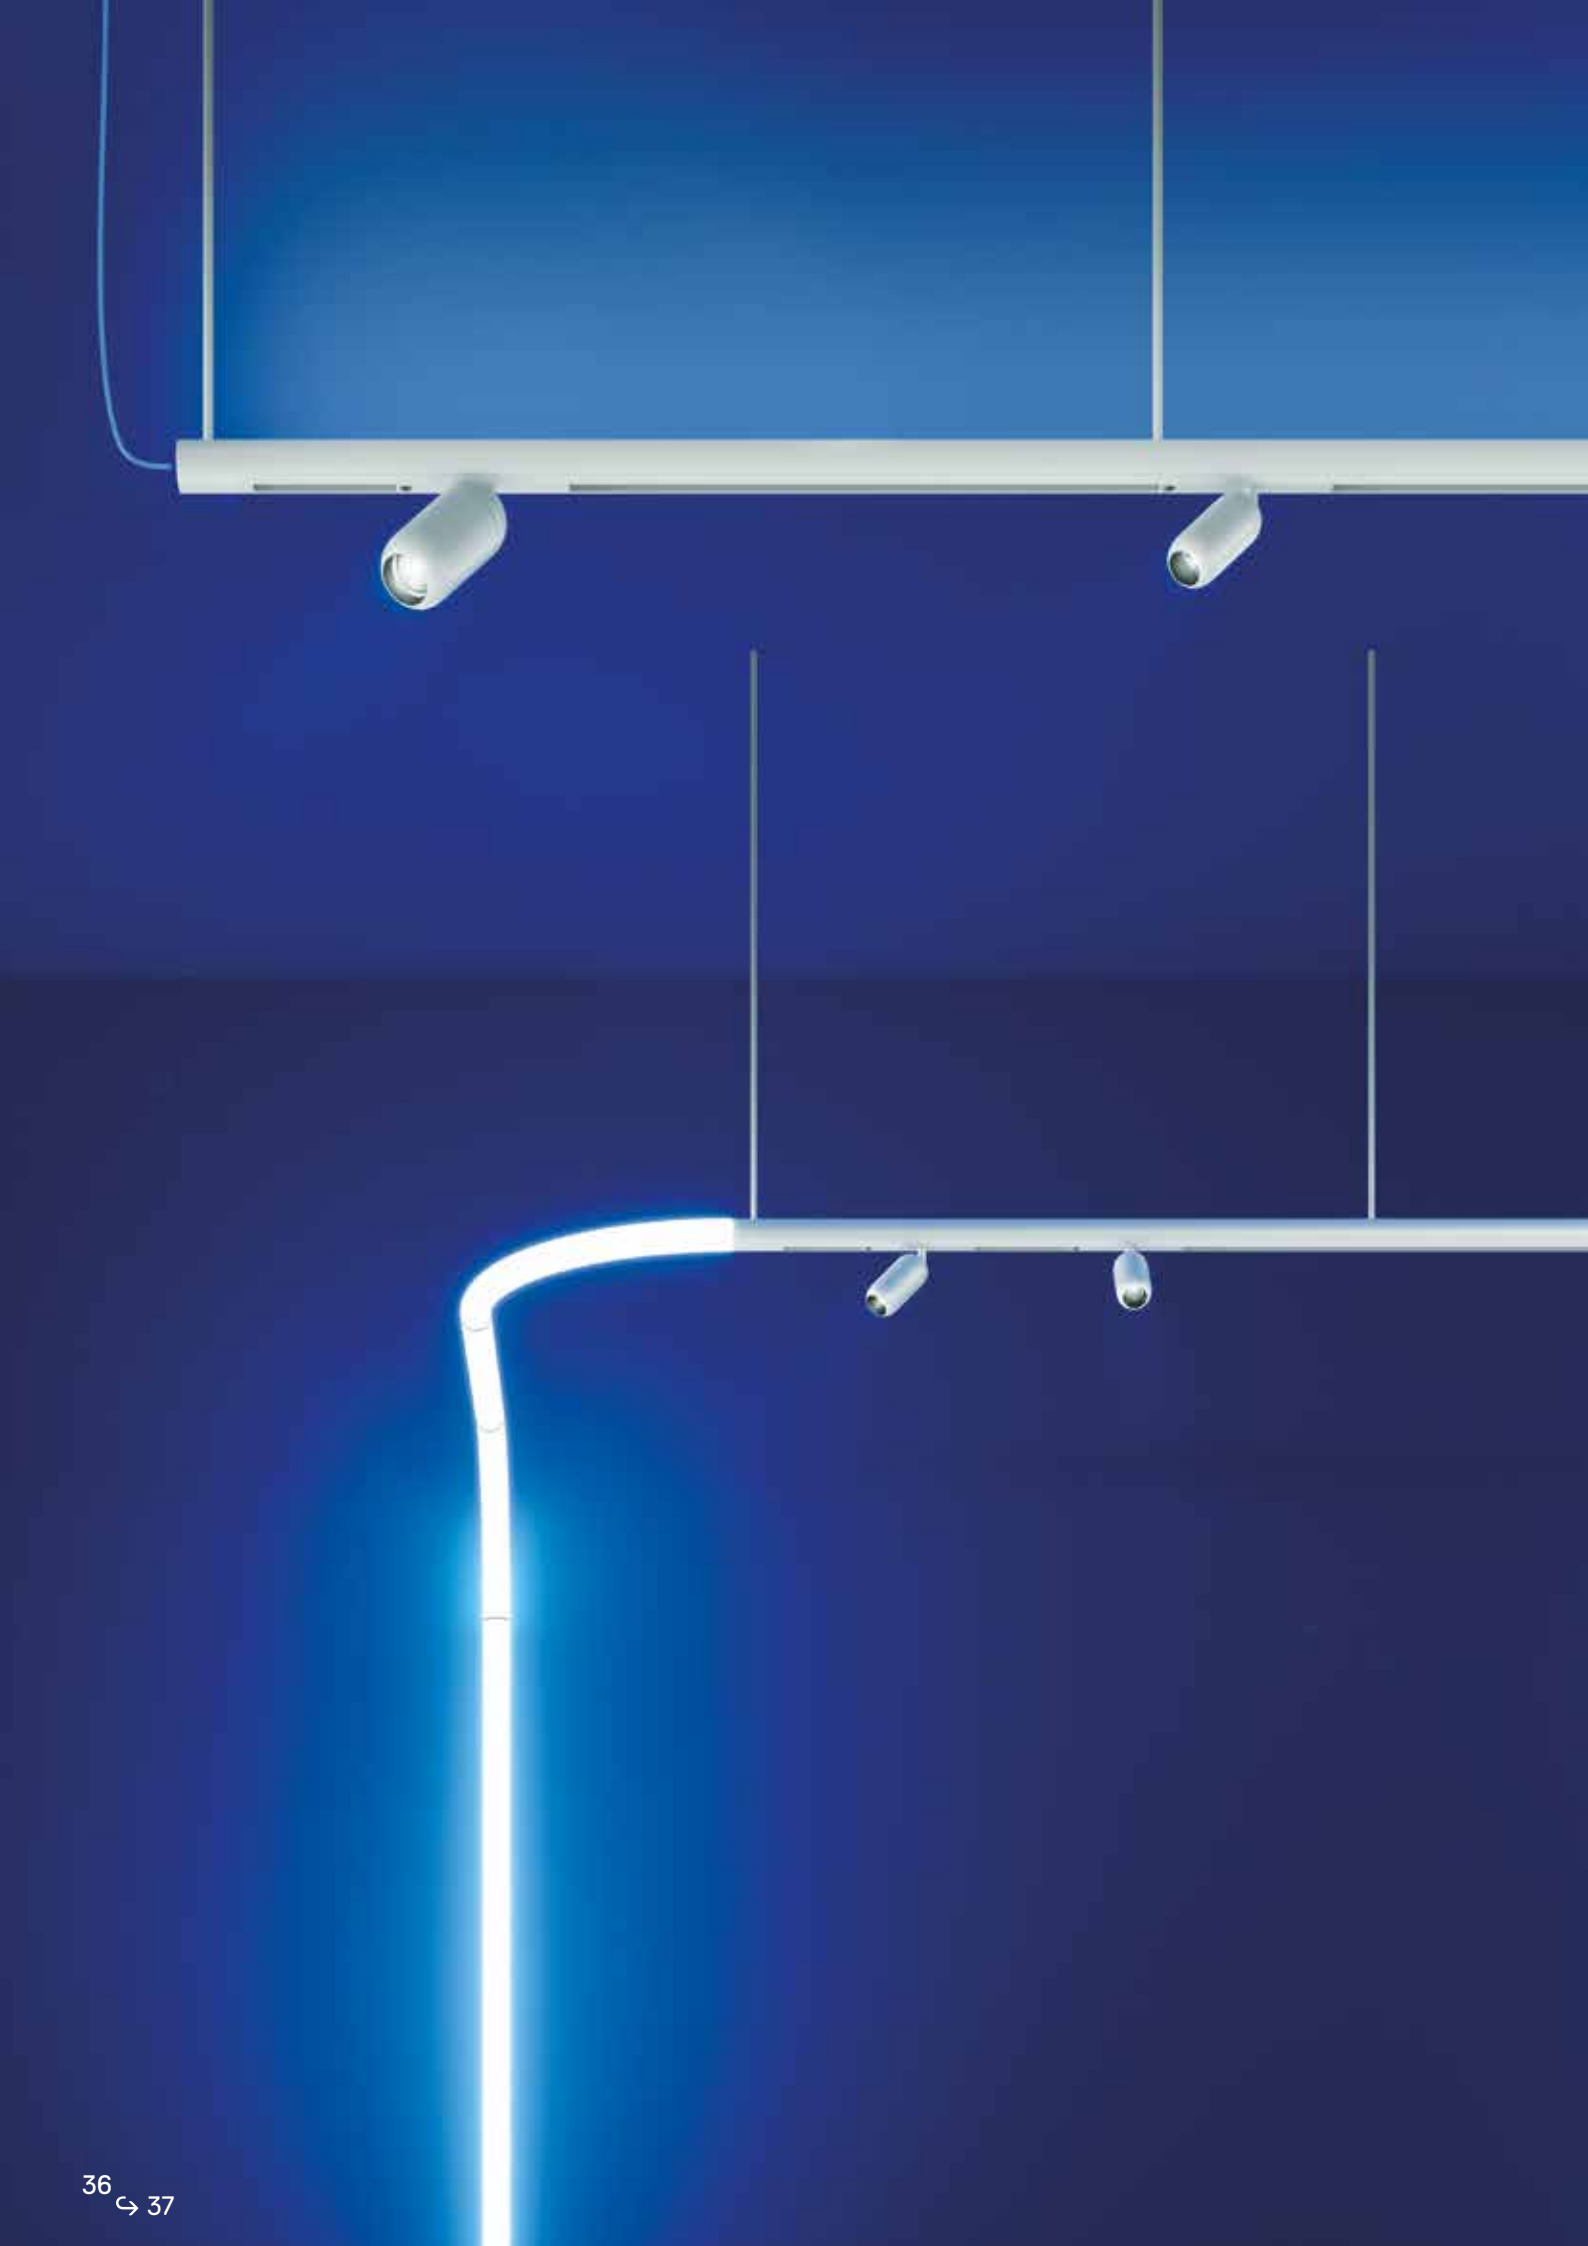

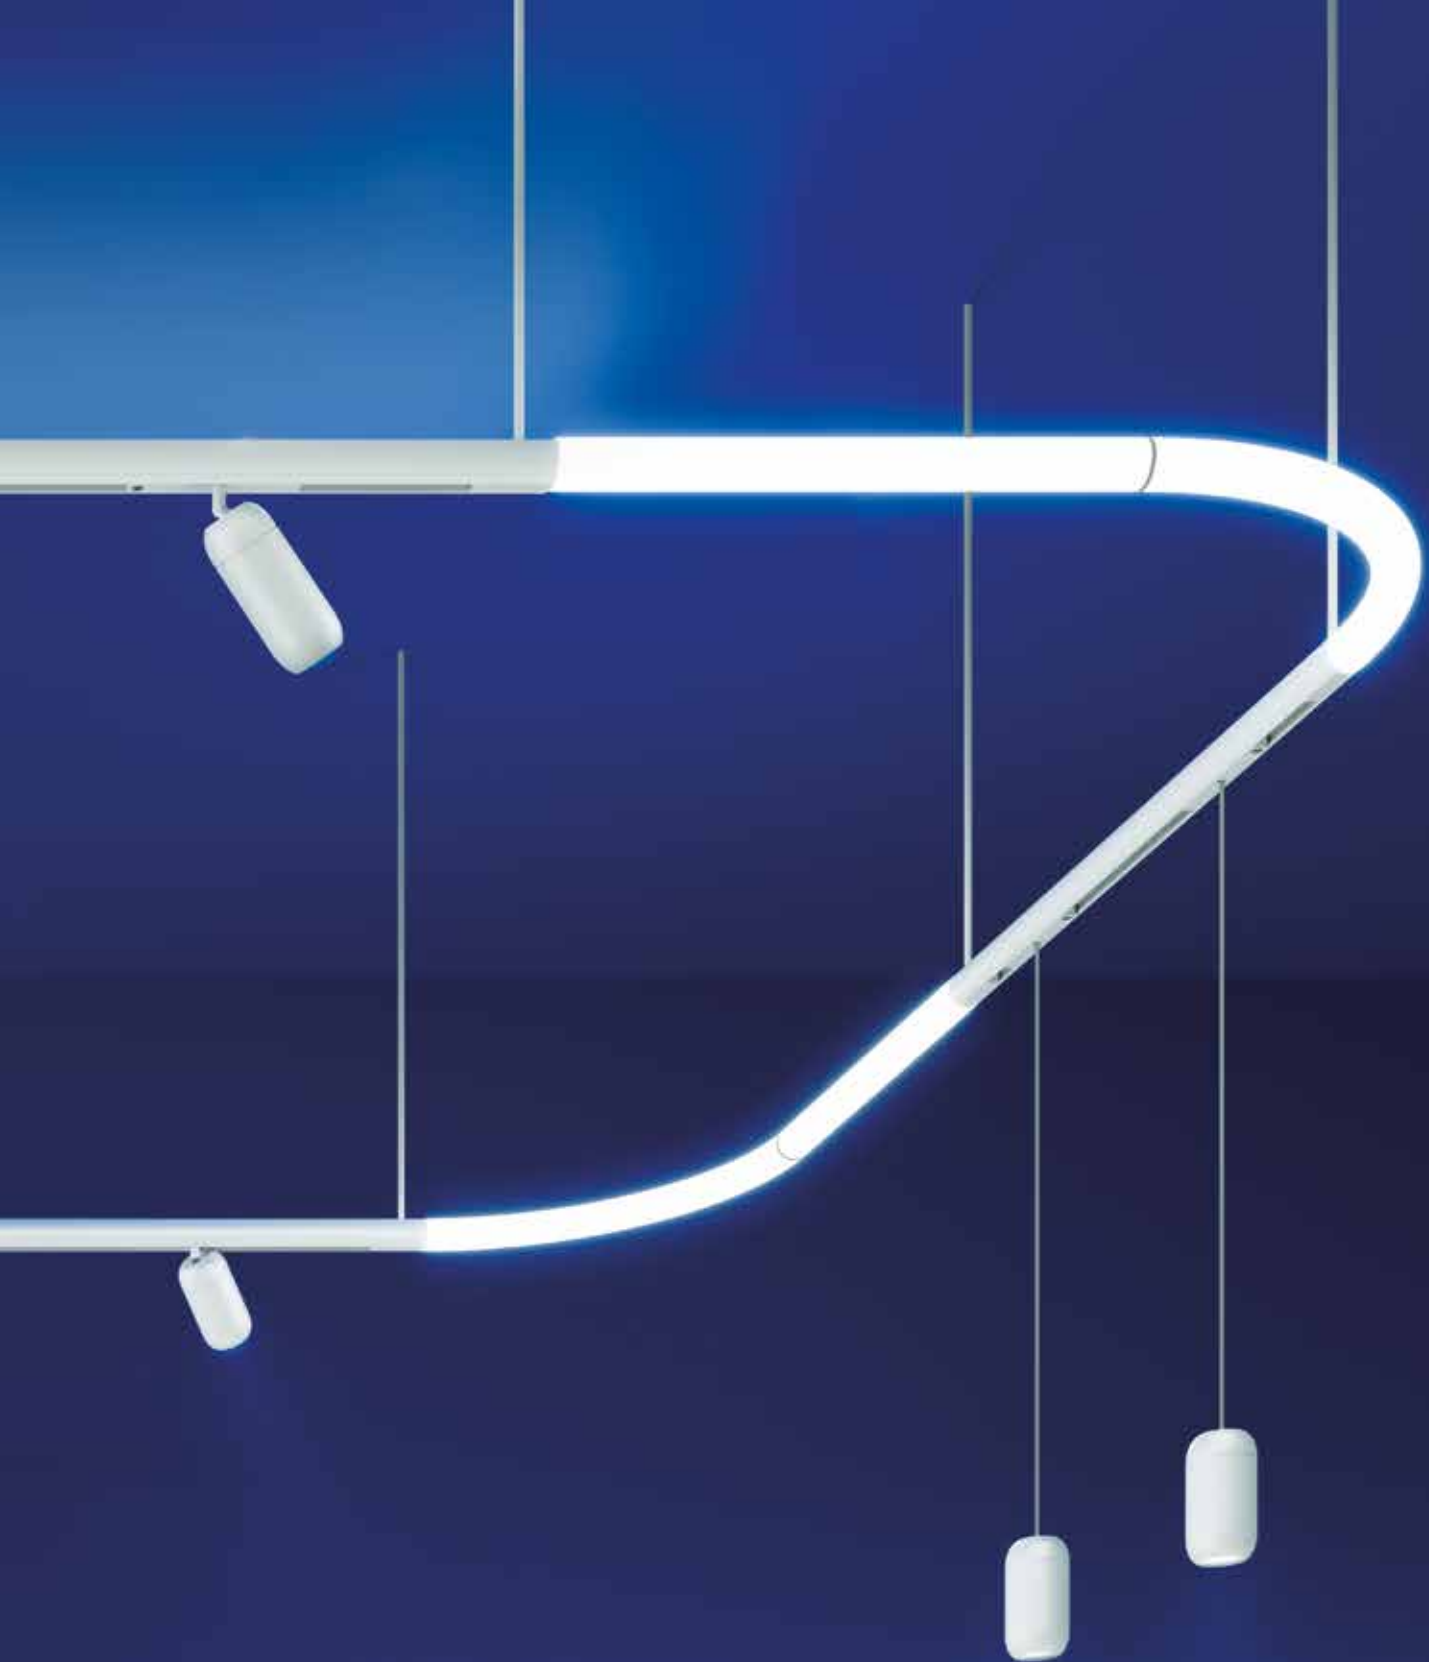

"The new Gople system follows the success of our original Gople pendant lamps, extending the language of Alphabet of light into new architectural typologies."

BIG

Complete system

Gople system is designed to allow double emission: it can have a track for direct spot emission and a diffused indirect light.

The different typology of Gople system modules can be combined with the maximum freedom.

The same diameter of Alphabet of light and Gople system allows to combine the two systems with mechanical continuity.




ALPHABET OF LIGHT

24V


GOPLE SYSTEM
TRACK

48V

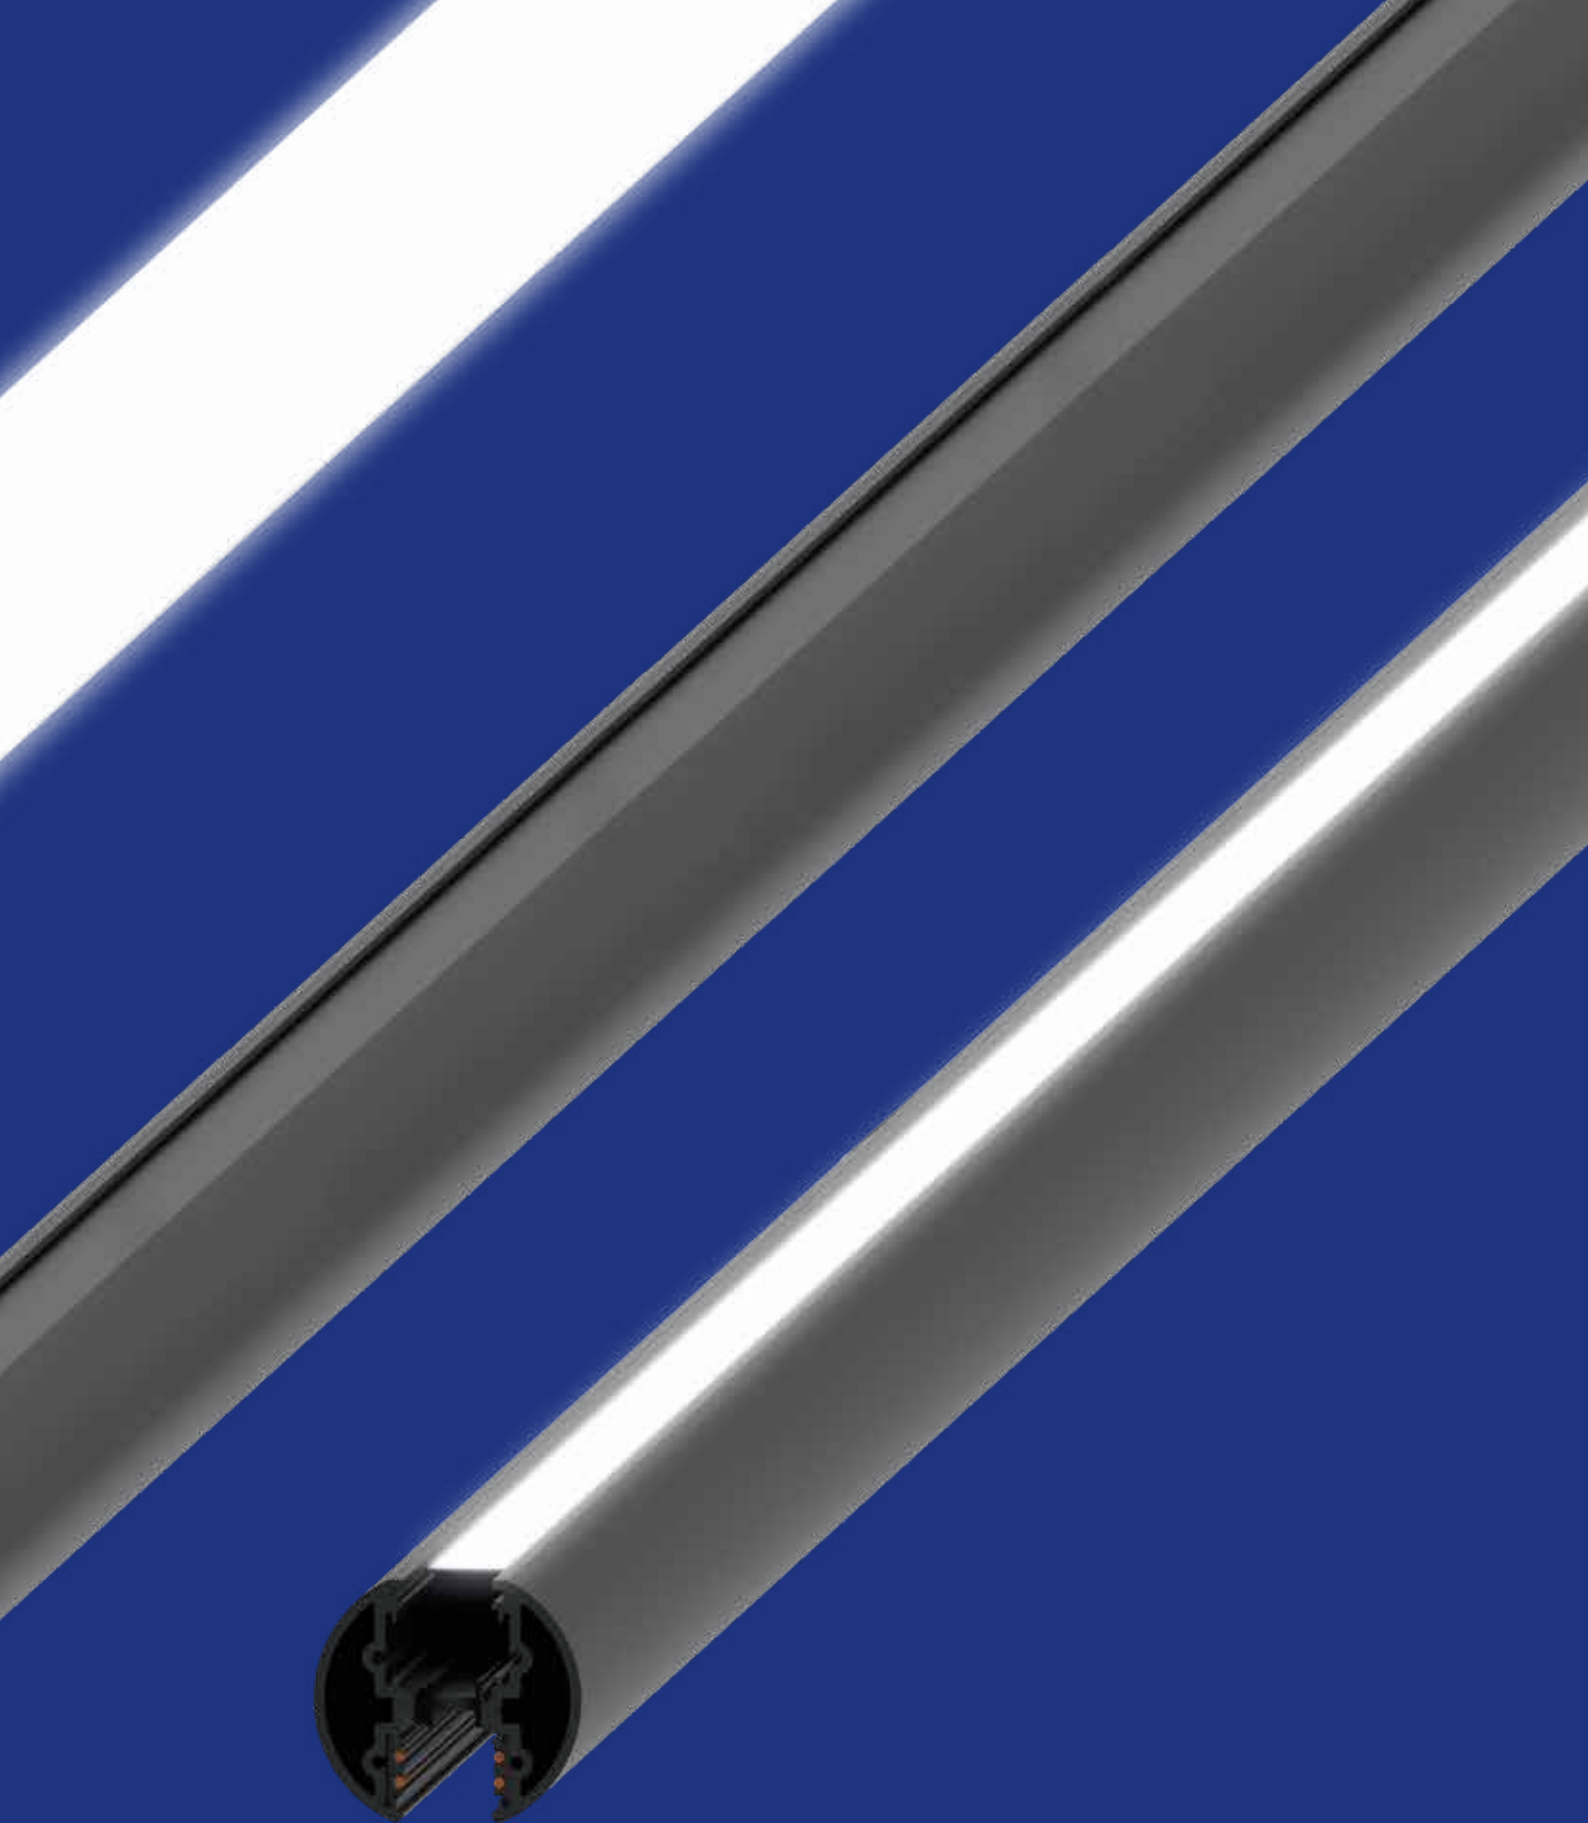


GOPLE SYSTEM
TRACK + INDIRECT EMISSION

48V

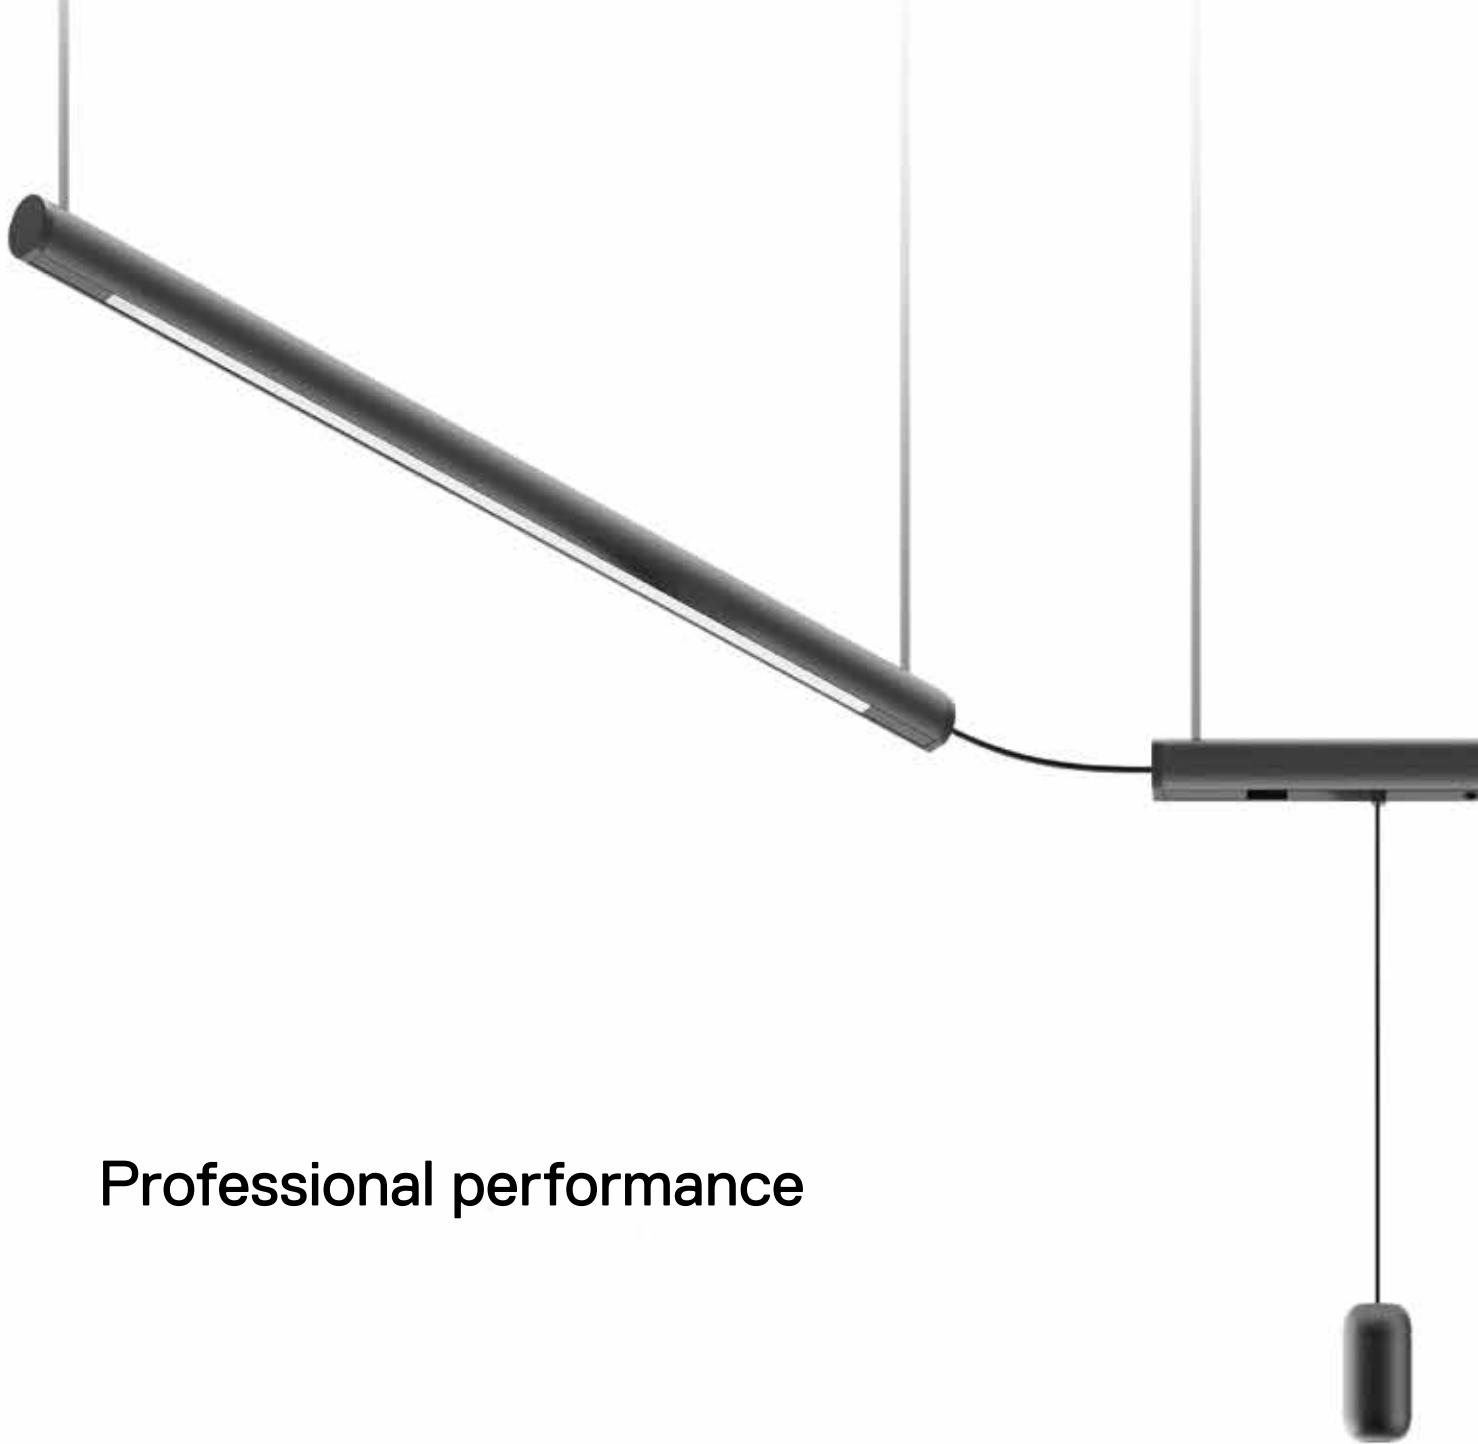

Professional performance

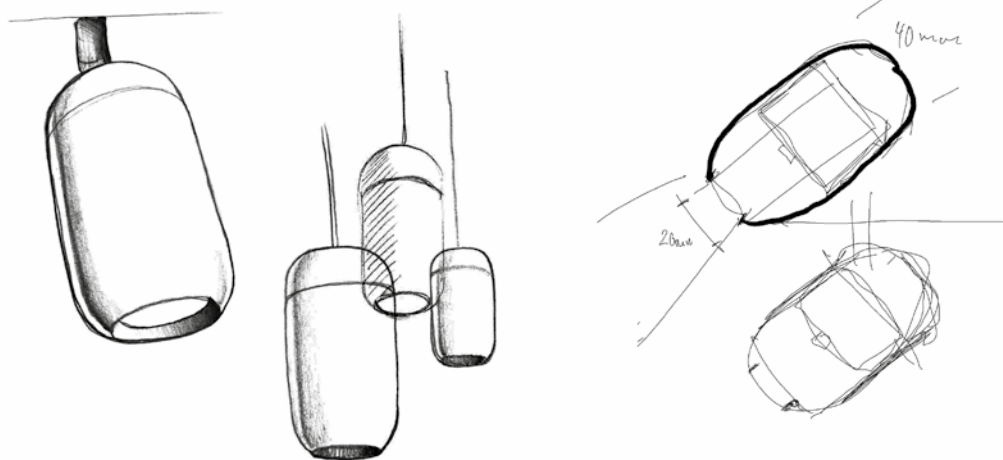



Gople spot offers highly professional performance within the soft geometries that remind in reduced-scale the iconic Gople diffuser.

The spotlight comes in two sizes, corresponding to different power and flux levels, each with multiple beam angles.

Artemide's expertise in managing the different qualities of light is also expressed in the ability to personalise light emissions with custom solutions, selecting the parameters of colour rendering (Gamut index and Fidelity Index) and spectrum quality dedicated to specific display situations.





Gople spot



GOPLE SPOT 60



S 13°	F 20°	WF 28°
9W	9W	9W
557 lm*	598 lm*	542 lm*



GOPLE SPOT 80



S 16°	F 22°	WF 32°
23W	23W	23W
1767 lm*	1786 lm*	1854 lm*




GOPLE SPOT PENDANT 60



S 13°	F 20°	WF 28°
9W	9W	9W
557 lm*	598 lm*	542 lm*




GOPLE SPOT PENDANT 80



S 16°	F 22°	WF 32°
23W	23W	23W
1767 lm*	1786 lm*	1854 lm*

* 3000 K Values.



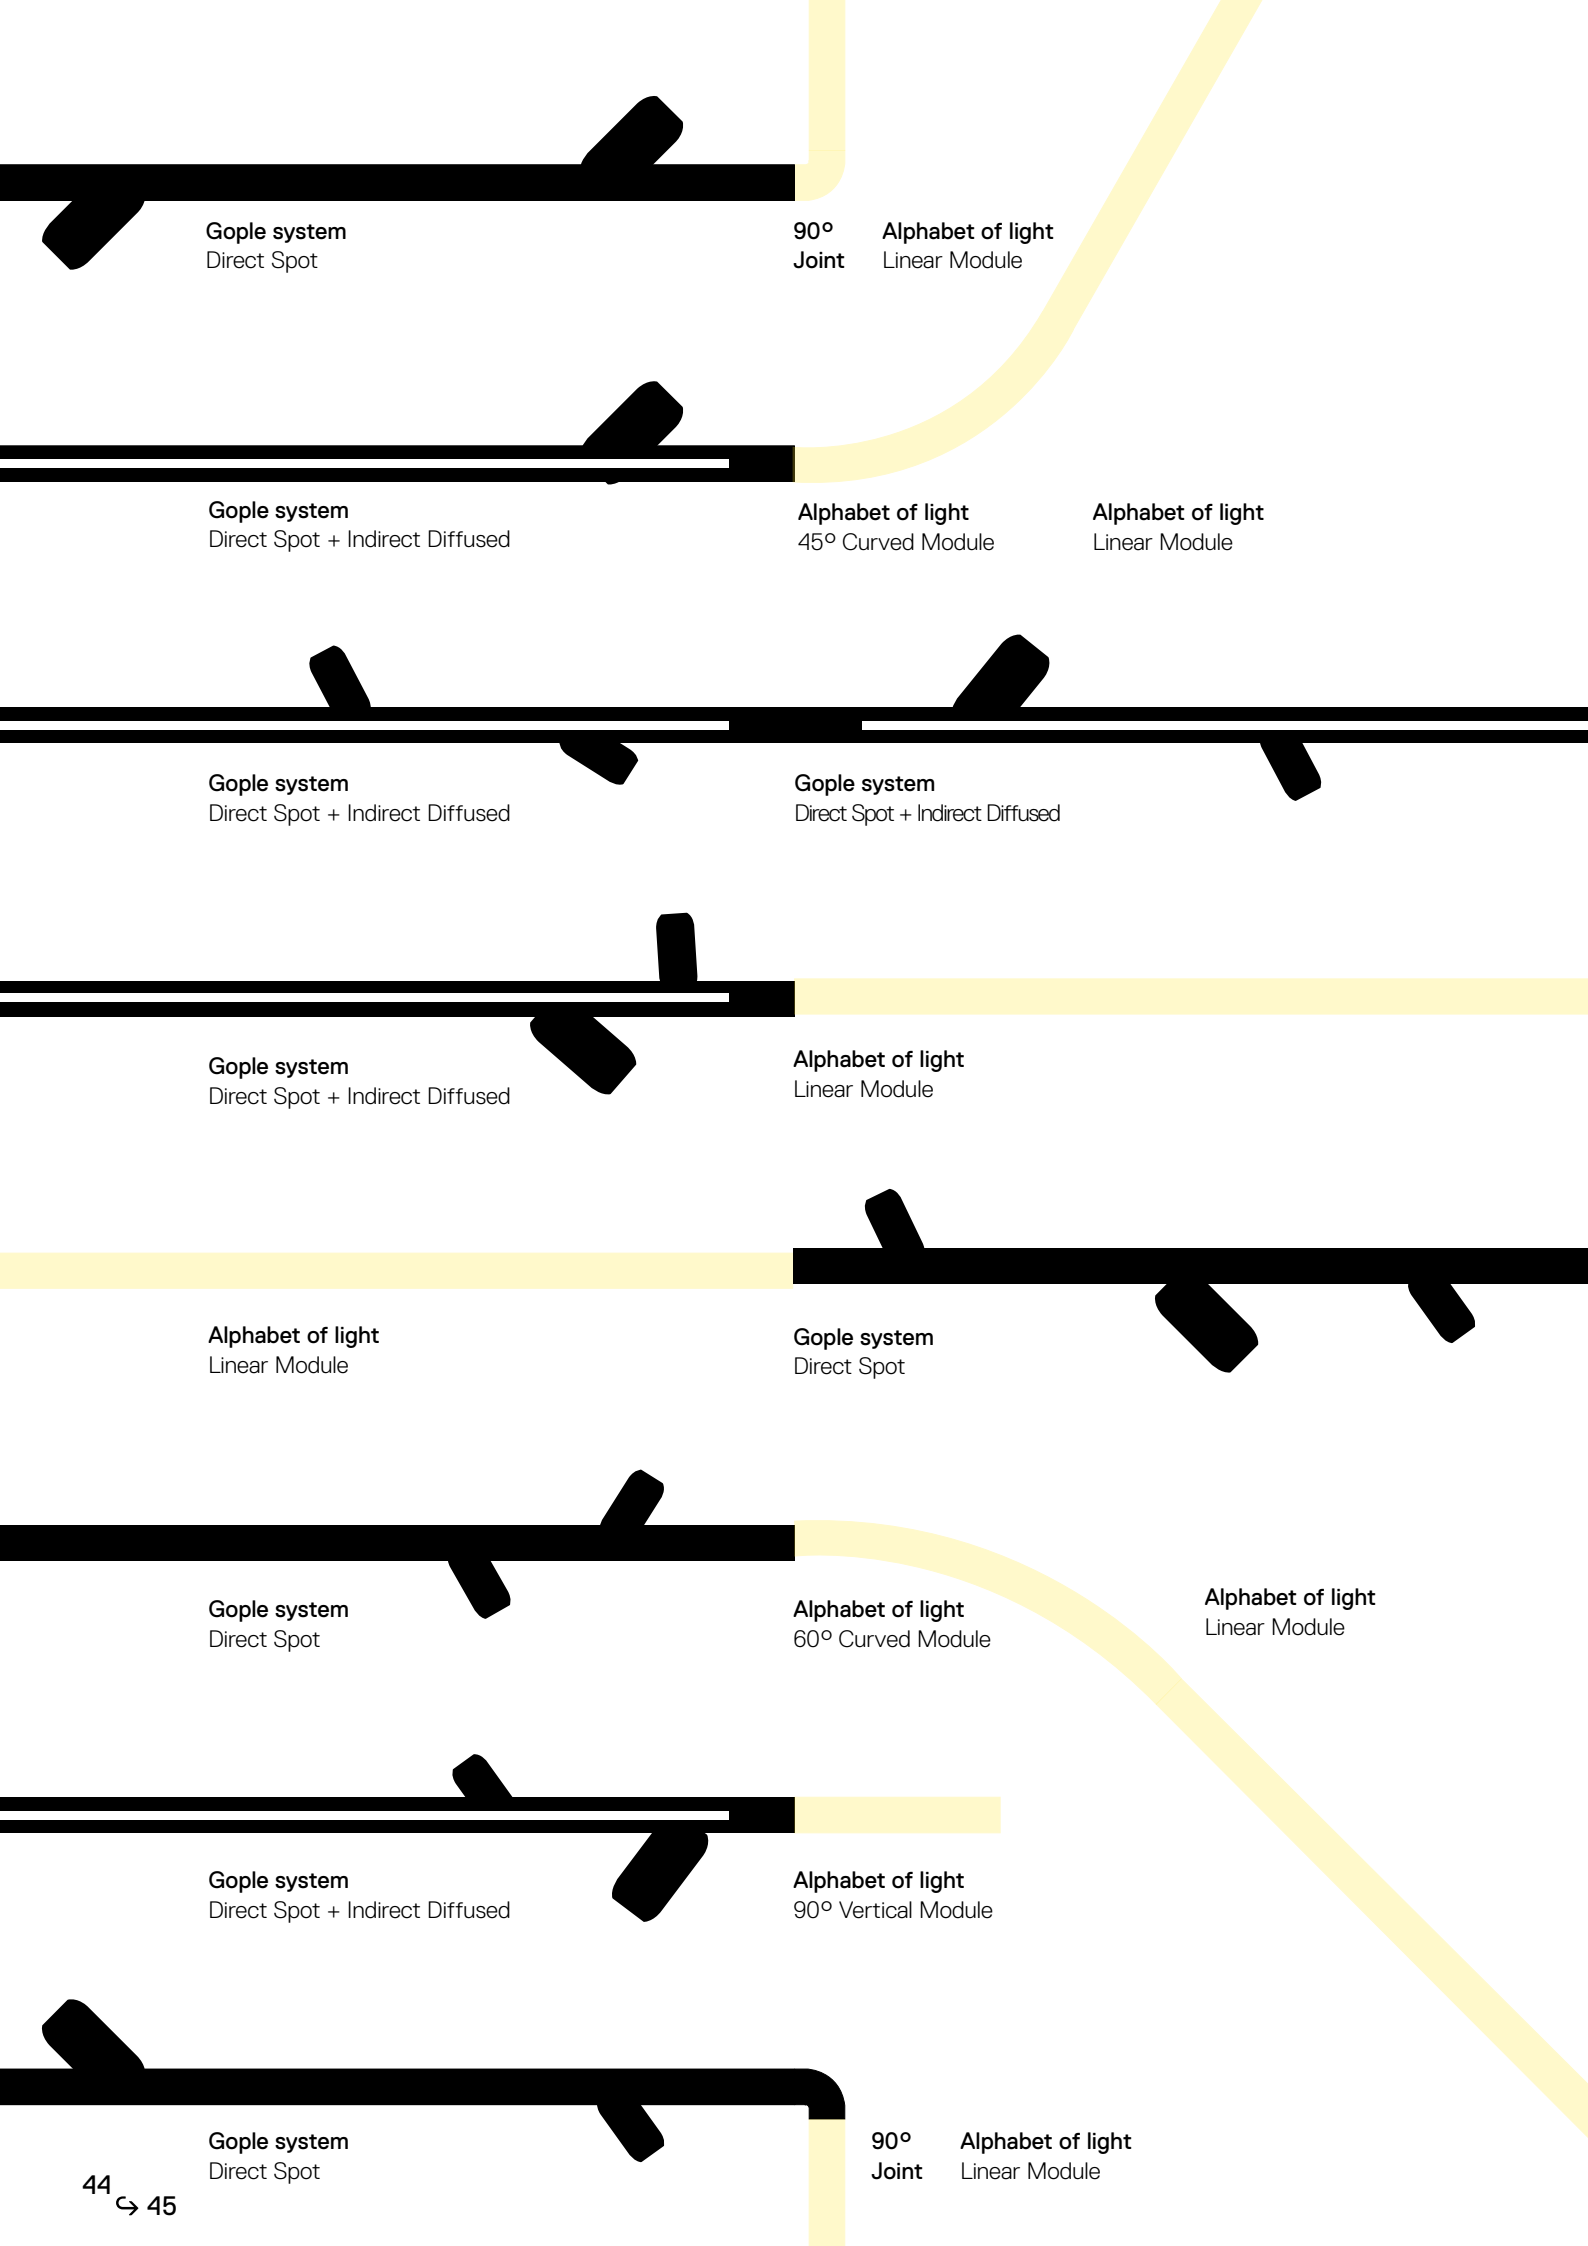

Gople system
Direct Spot

90° Joint
Alphabet of light
Linear Module

Gople system
Direct Spot + Indirect Diffused

Alphabet of light
45° Curved Module

Alphabet of light
Linear Module

Gople system
Direct Spot + Indirect Diffused

Gople system
Direct Spot + Indirect Diffused

Gople system
Direct Spot + Indirect Diffused

Alphabet of light
Linear Module

Alphabet of light
Linear Module

Gople system
Direct Spot

Gople system
Direct Spot

Alphabet of light
60° Curved Module


Alphabet of light
Linear Module

Gople system
Direct Spot + Indirect Diffused

Alphabet of light
90° Vertical Module

Gople system
Direct Spot

90° Joint
Alphabet of light
Linear Module

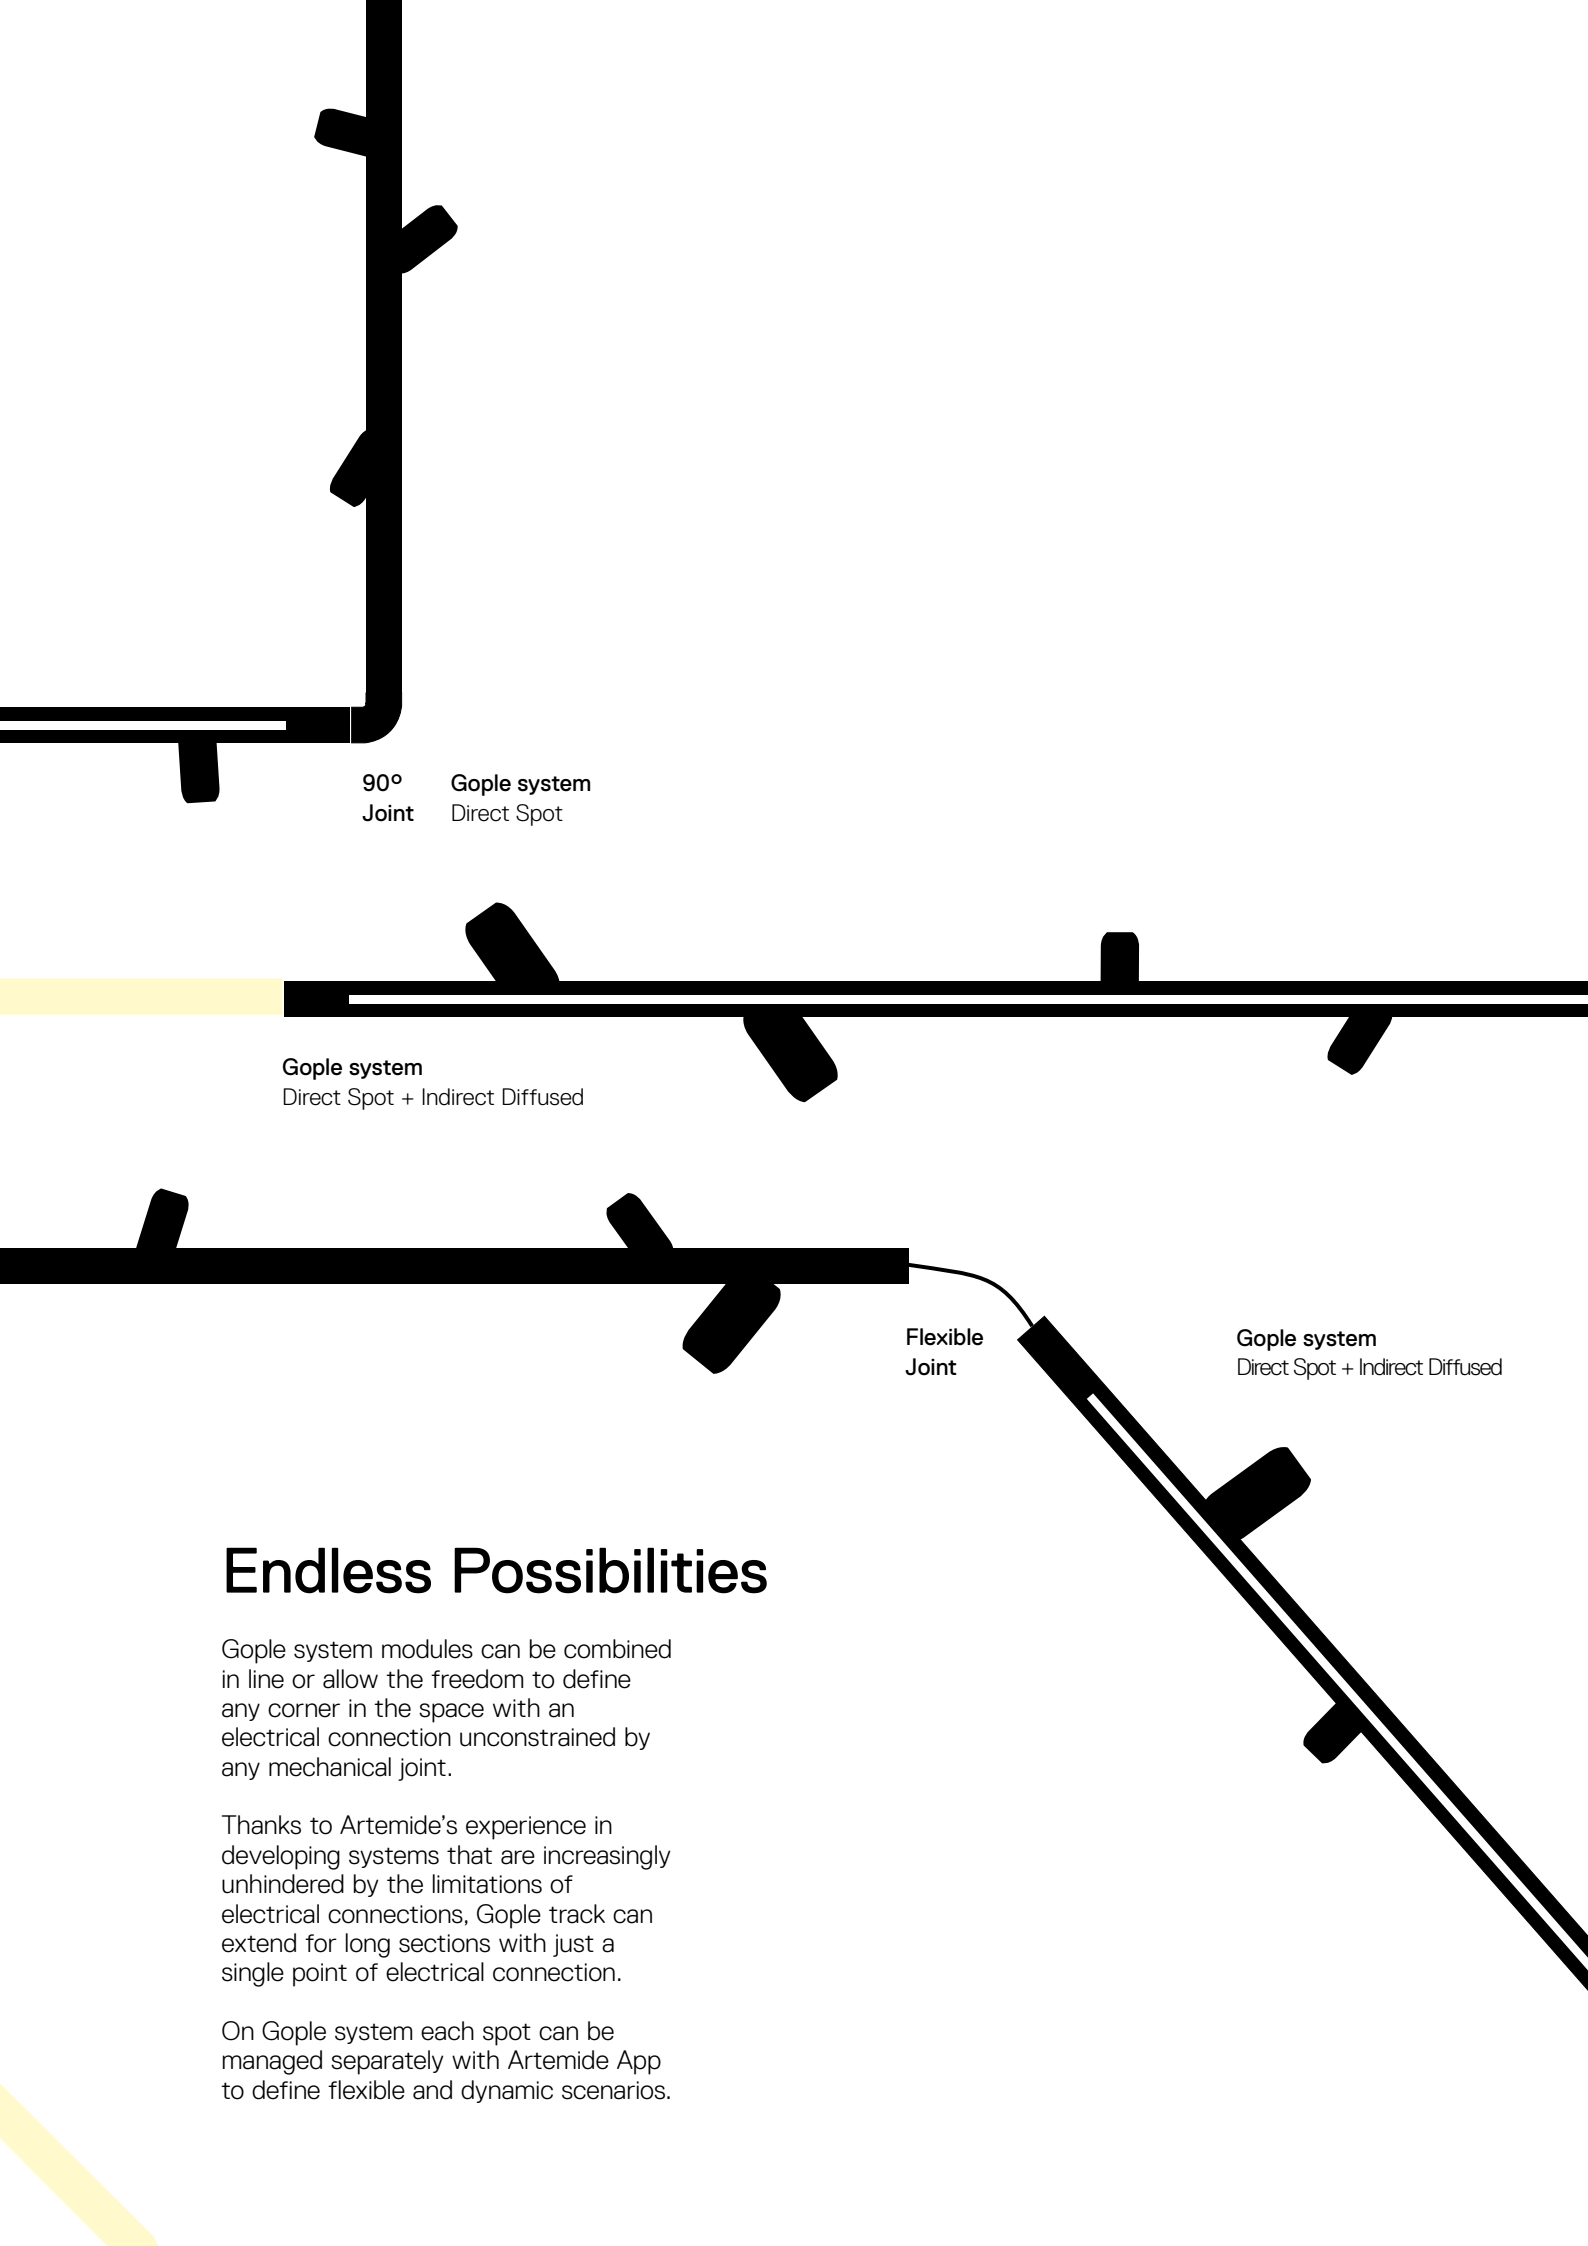

90°
Joint Gople system
Direct Spot

Gople system
Direct Spot + Indirect Diffused

Flexible
Joint

Gople system
Direct Spot + Indirect Diffused

Endless Possibilities

Gople system modules can be combined in line or allow the freedom to define any corner in the space with an electrical connection unconstrained by any mechanical joint.

Thanks to Artemide's experience in developing systems that are increasingly unhindered by the limitations of electrical connections, Gople track can extend for long sections with just a single point of electrical connection.

On Gople system each spot can be managed separately with Artemide App to define flexible and dynamic scenarios.

↪ GOPLE SYSTEM - ELEMENTS

White

Black

XF

01

04

MacAdam 3SDCM


Life L80 (10K) 55000h

CRI =80


IP20

→ LINEAR ELEMENTS


Direct Track 1180 mm




Direct Track 1772 mm



Direct Track + Indirect Emission 1180 mm



Direct Track + Indirect Emission 1772 mm




LINEAR DIRECT TRACK ELEMENTS

Suspension/Ceiling			
Length	V	Code	
1180 mm	48V	CB003. 01/04	
1772 mm	48V	CB004. 01/04	



LINEAR DIRECT TRACK + INDIRECT LIGHT ELEMENTS

Suspension					
Length	W	V	Flux	CCT	Code
1180 mm	16W indirect	48V	1420 lm indirect	3000 K	CB006. 01/04
1772 mm	32W indirect	48V	2840 lm indirect	3000 K	CB007. 01/04



↪ GOPLE SYSTEM - ACCESSORIES

White Black



01



04

Suspension / Ceiling accessories

	Code
 End cap	CB300. 04
 Flexible joint	CB207. 04
 Rigid suspension/ceiling joint with electrical connection	CB208. 01/04

Suspension accessories

	Code
 Powered suspension tige for ceiling rose (L=470mm)	CB100. 01/04
 Powered suspension tige / ceiling mounted for recessed and remote rose (L=500mm)	CB102. 01/04
 Suspension/ceiling tige	CB103. 01/04
 Powered suspension rigid joint for ceiling rose	CB209. 01/04
 Powered suspension rigid joint for recessed and remote rose	CB212. 01/04

Ceiling accessories

	Code
 Ceiling tige with powered head	CB101. 01/04
 Powered ceiling tige / ceiling mounted for recessed and remote rose	CB112. 01/04
 Suspension/ceiling tige	CB103. 01/04
 Ceiling rigid joint with powered head	CB211. 01/04
 Powered ceiling rigid joint for recessed and remote rose	CB213. 01/04

↪ GOPLE SYSTEM - 90° ANGLE

White

Black

01

04


IP20

SUSPENSION / CEILING JOINT

90° Angle with electrical connection

Code

CB400. 01/04

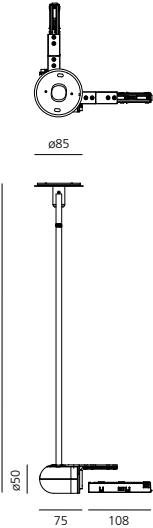


GOPLE SYSTEM + ALPHABET OF LIGHT 90° ANGLE
SUSPENSION / CEILING JOINT

90° Left Angle
(with rigid tige for suspension version and rigid tige for ceiling version)

Code

CB401. 01/04

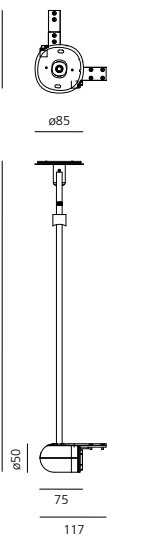


GOPLE SYSTEM + ALPHABET OF LIGHT 90° ANGLE
SUSPENSION / CEILING JOINT

90° Right Angle
(with rigid tige for suspension version and rigid tige for ceiling version)


Code

CB402. 01/04

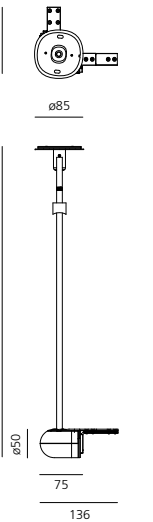



Gople system configuration

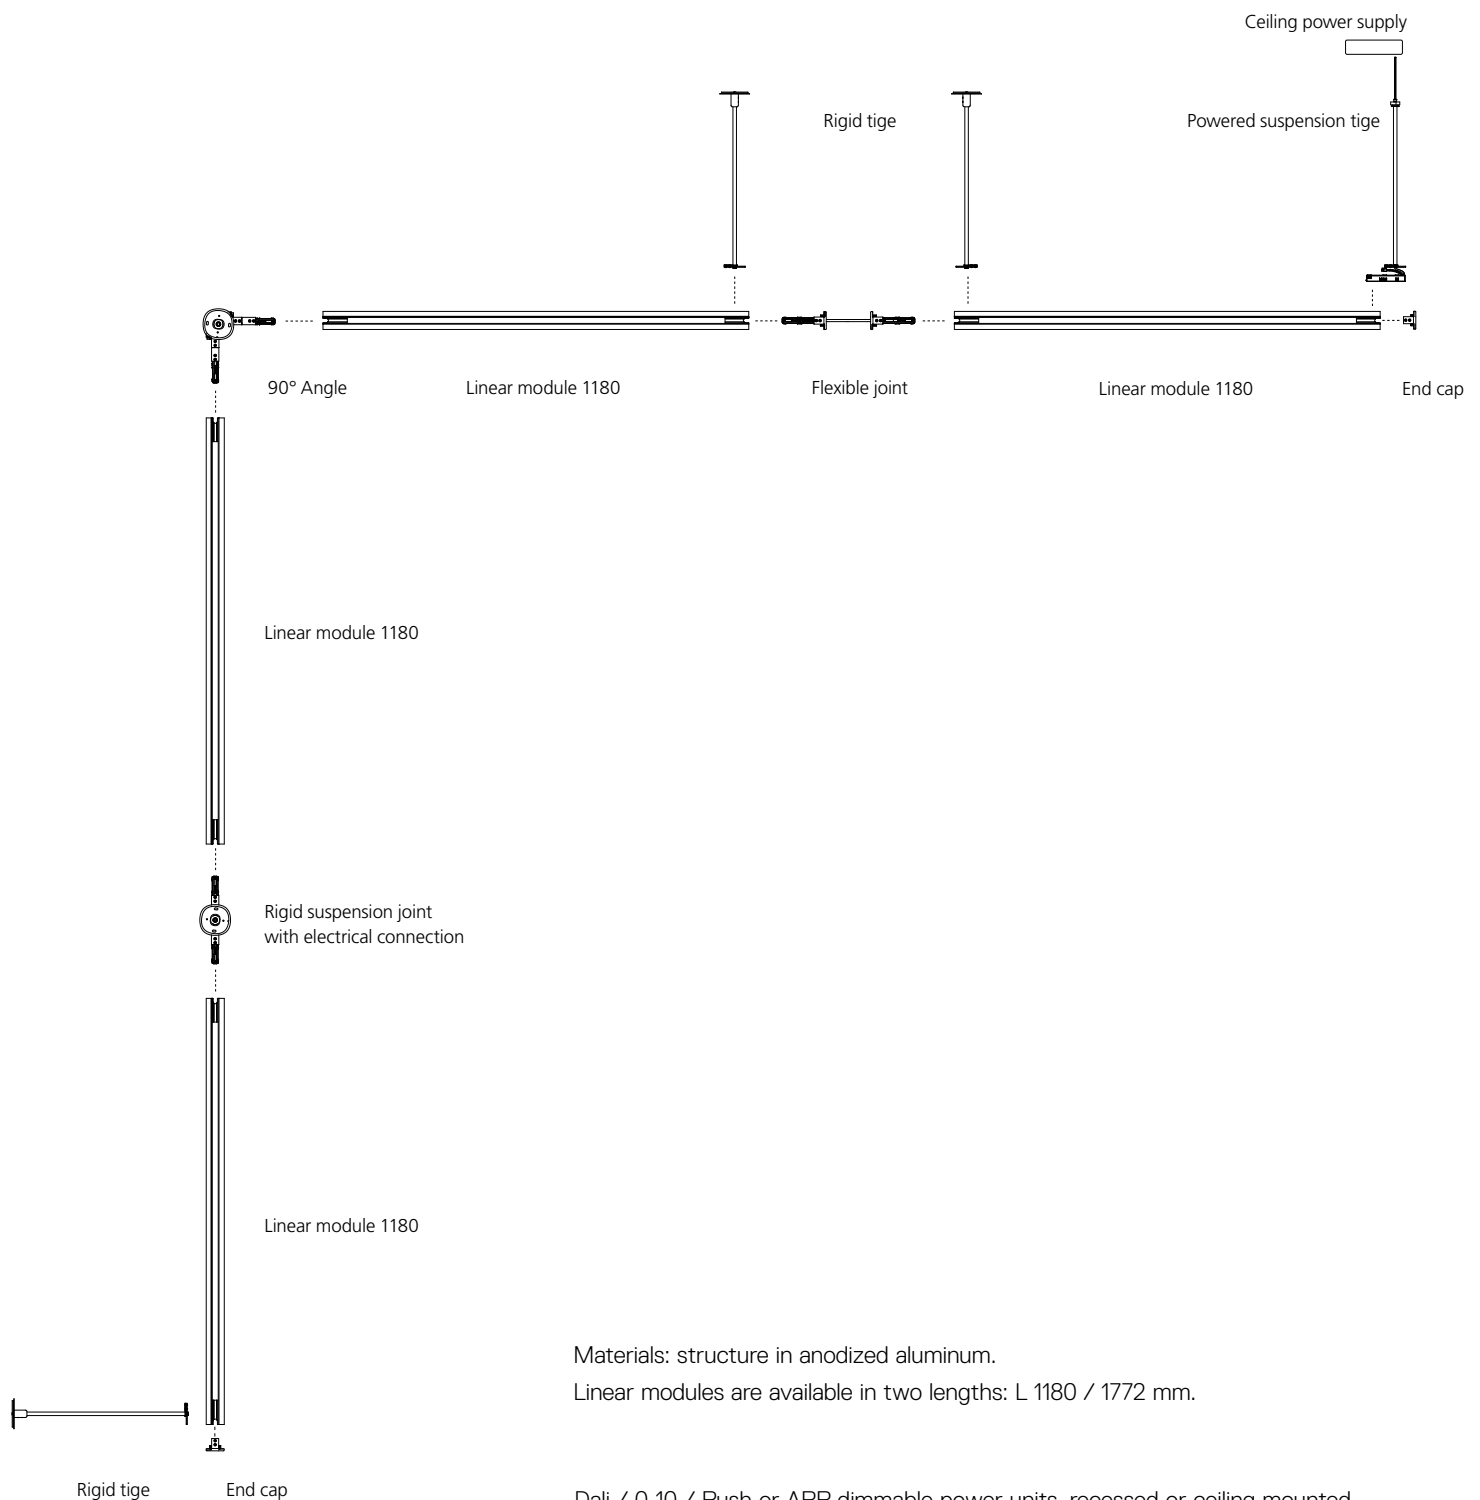

GOPL SYSTEM - POWER SUPPLY KIT

White Black



01



04

The APP driver can not be controlled by DALI dimming system and viceversa.

IP20




CEILING

Power supply kit	ND	DALI/PUSH/0-10	Artemide App
	Code	Code	Code
 Ceiling Power supply kit (ND / DALI / PUSH / 0-10/ APP) 150W 400x110x49H	CB500. 01/04	CB501. 01/04	CB502. 01/04
 Ceiling Power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 400x110x49H	CB503. 01/04	CB504. 01/04	CB505. 01/04

RECESSED

Power supply kit	ND	DALI/PUSH/0-10	Artemide App
	Code	Code	Code
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 150W 396x178x108H	CB60001	CB60101	CB60201
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 396x178x108H	CB60301	CB60401	CB60501
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 320W 396x178x108H	CB60601	CB60701	CB60801

REMOTE

Power supply kit	DALI/PUSH/0-10	Artemide App
	Code	Code
 Remote power supply kit (DALI / PUSH / 0-10/APP) 240W 313x243x57,5H	CB70001	CB70101
 Remote power supply kit (DALI / PUSH / 0-10/APP) 320W 313x243x57,5H	CB70201	CB70301

Optional control devices - BLL wireless switch

	Code
 Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	DV1080APP

Gople spots



↳ GOPLE SYSTEM - SPOT TRACK

White Black



01



04

S



F



WF



Delivery time on demand
2700K / 4000K


MacAdam 3SDCM
*MacAdam 2SDCM
CRI = 90

IP20




GOPLE 60 SPOT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
9 W	48V	S 13°	557 lm	2700K	CA000. 01/04
			557 lm	3000K	CA010. 01/04
			557 lm	4000K	CA020. 01/04
		*F 20°	556 lm	2700K	CA001. 01/04
			598 lm	3000K	CA011. 01/04
			641 lm	4000K	CA021. 01/04
		*WF 28°	503 lm	2700K	CA002. 01/04
			542 lm	3000K	CA012. 01/04
			580 lm	4000K	CA022. 01/04




GOPLE 80 SPOT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
23 W	48V	S 16°	1698 lm	2700K	CA100. 01/04
			1767 lm	3000K	CA110. 01/04
			1795 lm	4000K	CA120. 01/04
		F 22°	1716 lm	2700K	CA101. 01/04
			1786 lm	3000K	CA111. 01/04
			1814 lm	4000K	CA121. 01/04
		WF 32°	1782 lm	2700K	CA102. 01/04
			1854 lm	3000K	CA112. 01/04
			1883 lm	4000K	CA122. 01/04




GOPLE 60 SPOT PENDANT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
9 W	48V	S 13°	557 lm	2700K	CA200. 01/04
			557 lm	3000K	CA210. 01/04
			557 lm	4000K	CA220. 01/04
		*F 20°	556 lm	2700K	CA201. 01/04
			598 lm	3000K	CA211. 01/04
			641 lm	4000K	CA221. 01/04
		*WF 28°	503 lm	2700K	CA202. 01/04
			542 lm	3000K	CA212. 01/04
			580 lm	4000K	CA222. 01/04



GOPLE 80 SPOT PENDANT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
23 W	48V	S 16°	1698 lm	2700K	CA300. 01/04
			1767 lm	3000K	CA310. 01/04
			1795 lm	4000K	CA320. 01/04
		F 22°	1716 lm	2700K	CA301. 01/04
			1786 lm	3000K	CA311. 01/04
			1814 lm	4000K	CA321. 01/04
		WF 32°	1782 lm	2700K	CA302. 01/04
			1854 lm	3000K	CA312. 01/04
			1883 lm	4000K	CA322. 01/04



Alphabet of light & Gople system Joints



↪ ALPHABET OF LIGHT AND GOPLE SYSTEM - JOINTS

White Black



01



04

IP20




JOINTS

		Code
01	→ Linear - linear joint	CB200. 01/04
02	→ Linear - curve 45° right joint	CB201. 01/04
03	→ Linear - curve 45° left joint	CB202. 01/04
04	→ Linear - curve 60° right joint	CB203. 01/04
05	→ Linear - curve 60° left joint	CB204. 01/04
06	→ Linear - curve up joint	CB205. 01/04
07	→ Linear - curve down joint	CB206. 01/04
08	→ Linear - curve 90° right joint	CB307. 01/04
09	→ Linear - curve 90° left joint	CB306. 01/04



Code CB200.01/04_ **JOINT 1**
→ LINEAR - LINEAR JOINT



Code CB201.01/04_ **JOINT 2**
→ LINEAR - CURVE 45° RIGHT JOINT



Code CB202.01/04_ **JOINT 3**
→ LINEAR - CURVE 45° LEFT JOINT



Code CB203.01/04_ **JOINT 4**
→ LINEAR - CURVE 60° RIGHT JOINT



Code CB204.01/04_ **JOINT 5**
→ LINEAR - CURVE 60° LEFT JOINT



Code CB205.01/04_ **JOINT 6**
→ LINEAR - CURVE UP JOINT



Code CB206.01/04_ **JOINT 7**
→ LINEAR - CURVE DOWN JOINT





Code CB306.01/04_ **JOINT 8**
→ LINEAR - CURVE 90° RIGHT JOINT



Code CB307.01/04_ **JOINT 9**
→ LINEAR - CURVE 90° LEFT JOINT


Alphabet of light & Gople system Configuration

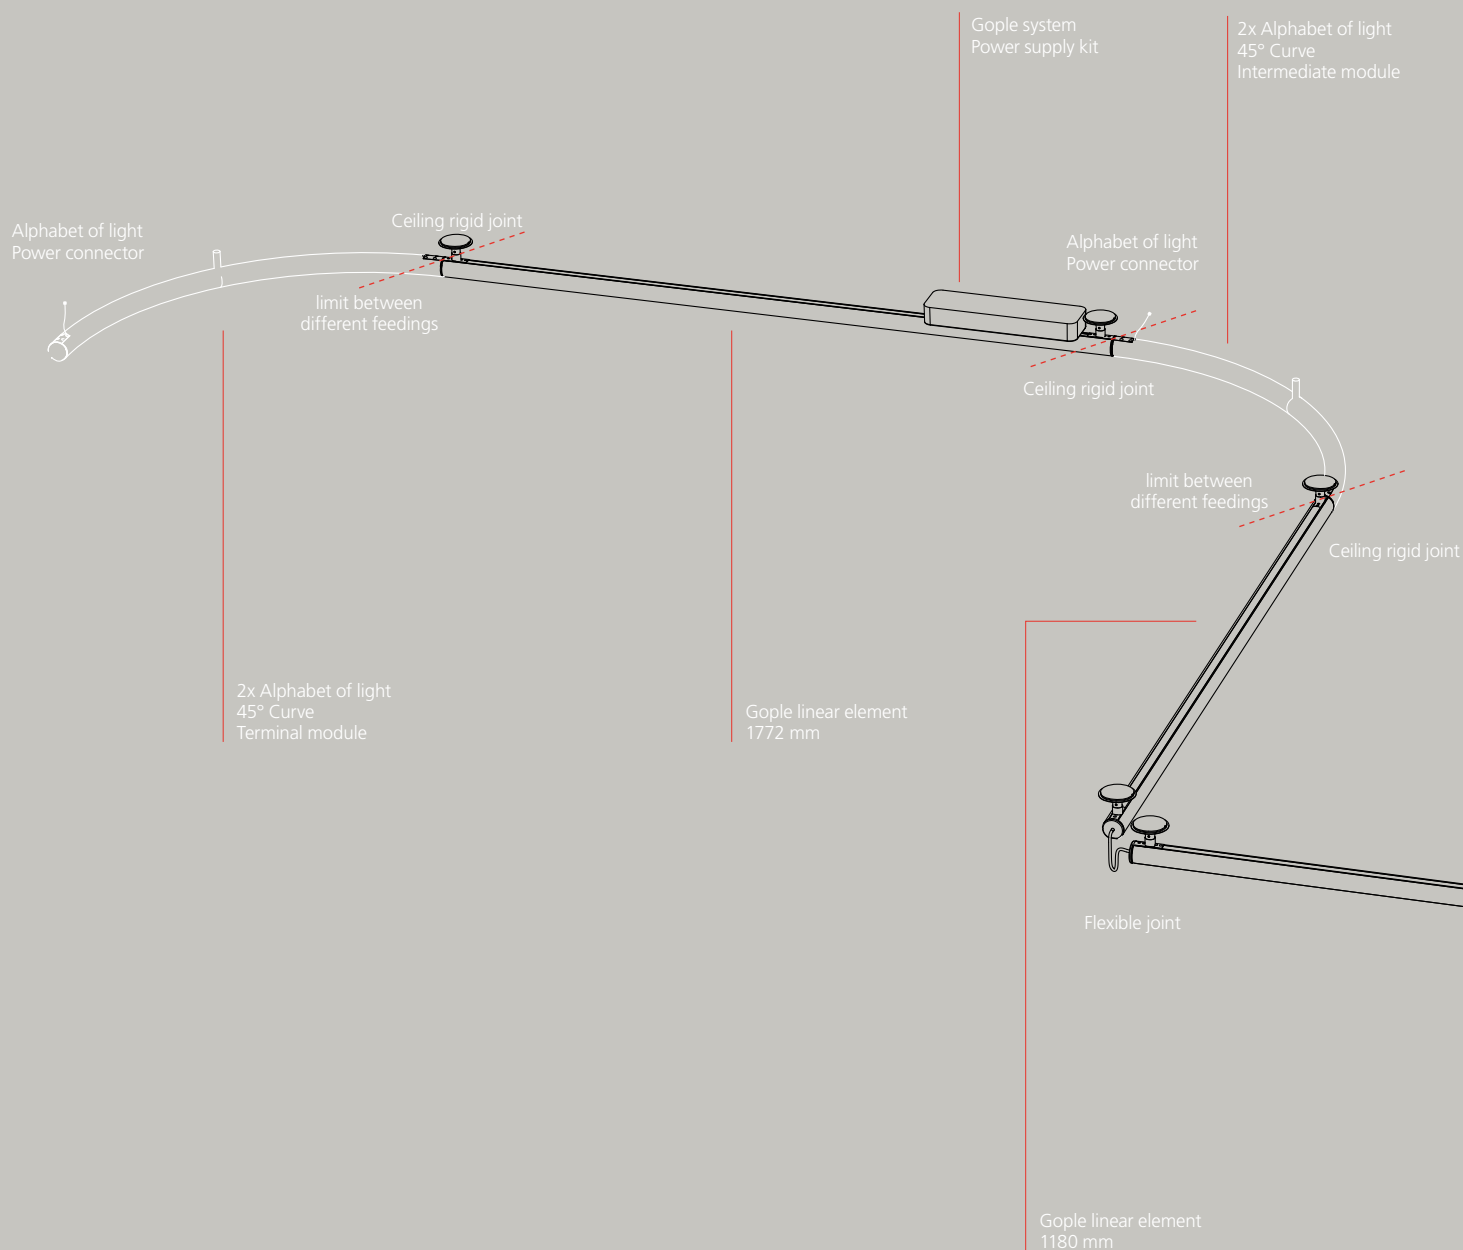

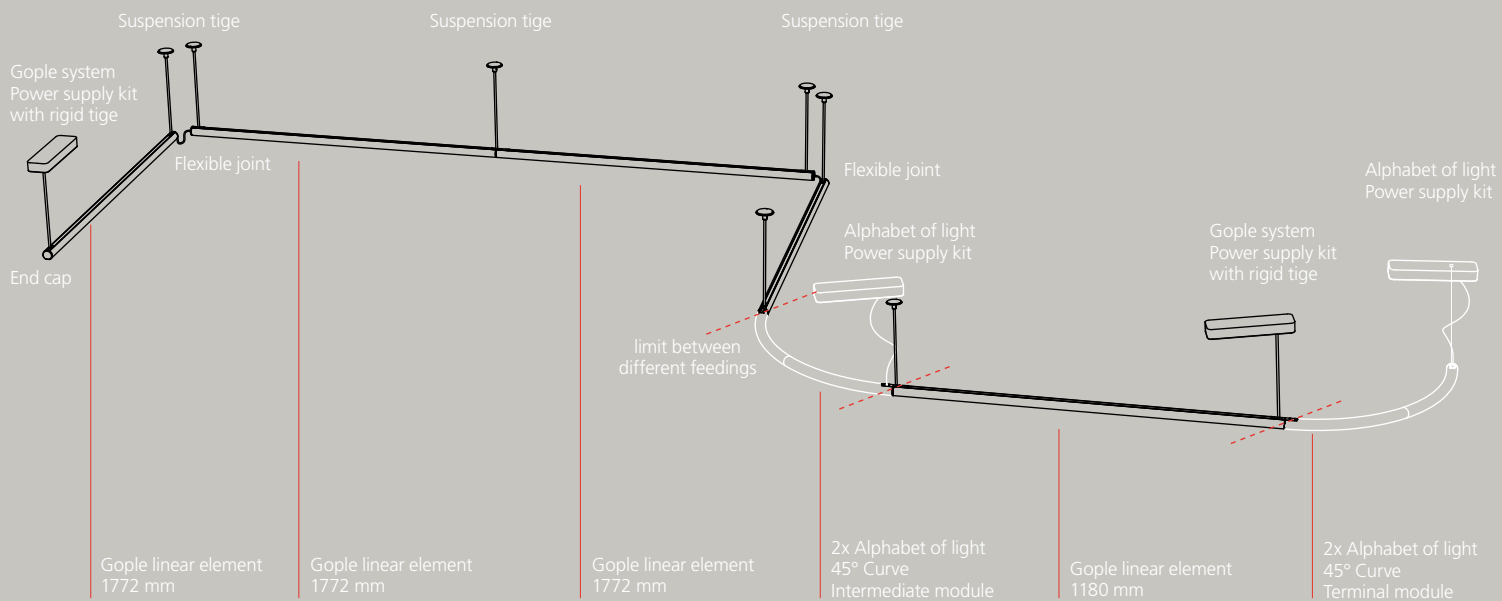





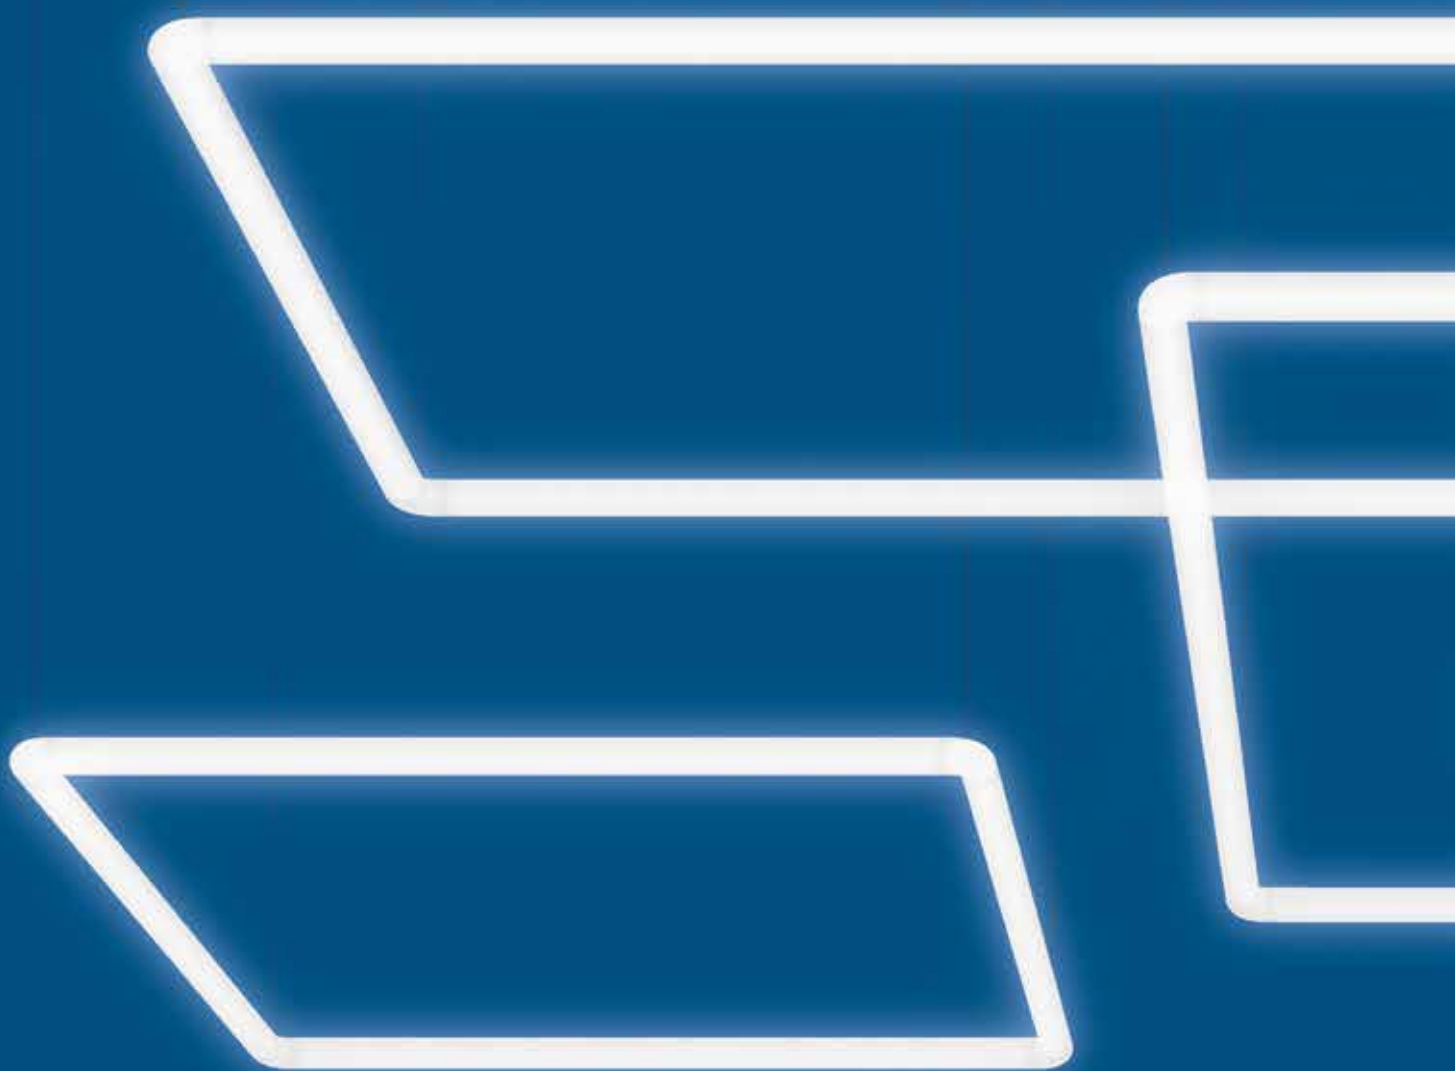


Alphabet of light Square-Rectangular

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA.



→ PATENT OF INVENTION: MECHANICAL AND ELECTRICAL CONNECTION
→ PATENT OF INVENTION: OPTICS



↪ ALPHABET OF LIGHT - WALL/CEILING SEMI-RECESSED

Opal White



XF






MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20





SQUARE

	W	Flux	CCT	Code
Square 120	90 W	8195 lm	3000K	1430110A
Square 180	138W	12104 lm	3000K	1430120A

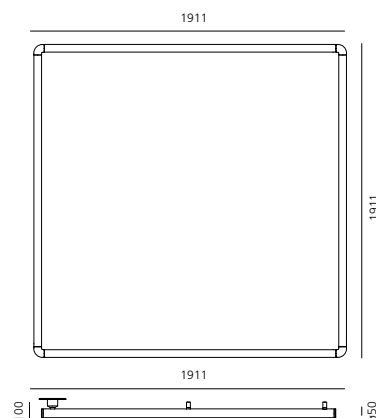

RECTANGULAR

	W	Flux	CCT	Code
Rectangular	114 W	10150 lm	3000K	1430130A

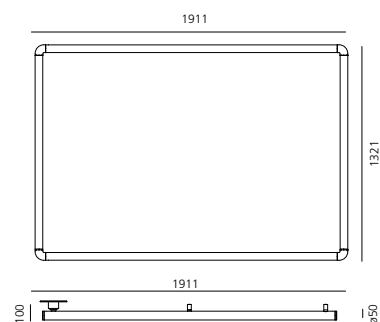

Wall/Ceiling Semi-recessed Power Units

Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)

Code

2271010A

2271010APP

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code

DV1080APP



↪ ALPHABET OF LIGHT - WALL/CEILING

Opal White



XF



MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20
⊕

SQUARE

	W	Flux	CCT
Square 120	100 W	8195 lm	3000K
Square 180	145W	12104 lm	3000K

DALI / PUSH

Code

1430210A




1430220A

APP & PUSH

Code

1430210APP

1430220APP

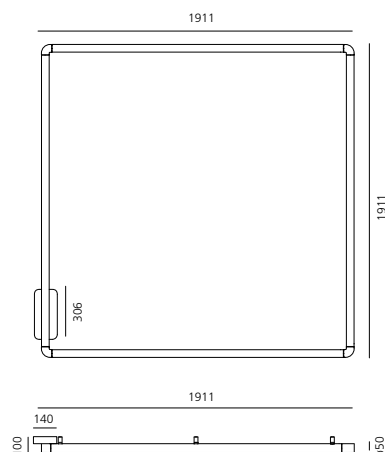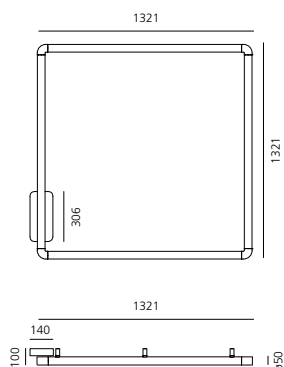

RECTANGULAR

	W	Flux	CCT
Rectangular	120 W	10150 lm	3000K

DALI / PUSH


Code

1430230A

APP & PUSH

Code

1430230APP

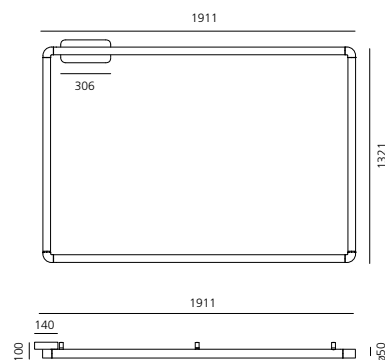

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code

DV1080APP

↪ ALPHABET OF LIGHT - SUSPENSION

Opal White

XF



MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20

SQUARE



	W	Flux	CCT
Square 120	100 W	8195 lm	3000K
Square 180	145W	12104 lm	3000K

DALI / PUSH

Code
1430010A
1430020A

APP & PUSH

Code
1430010APP
1430020APP

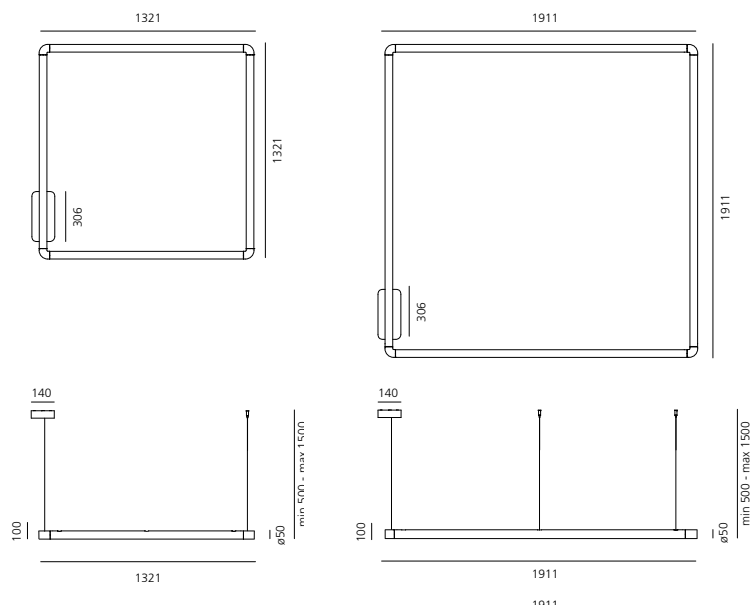

RECTANGULAR



	W	Flux	CCT
Rectangular	120 W	10150 lm	3000K

DALI / PUSH

Code
1430030A

APP & PUSH

Code
1430030APP

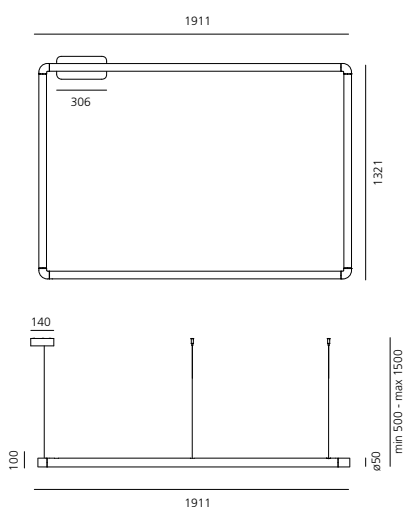

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

Alphabet of light

Linear-Circular

→ PATENT OF INVENTION: MECHANICAL AND ELECTRICAL CONNECTION

→ PATENT OF INVENTION: OPTICS



La Biennale di Venezia, "Robin Hood Gardens: A Ruin in Reverse" Exhibition, | 2018

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA.

Linear modules are available in three lengths: L 1200 / 1800 / 2400 mm.

Circular modules are available in two diameters: $\varnothing$ tot 900 / 1550 mm.



Artemide
App







↪ ALPHABET OF LIGHT - WALL/CEILING

Opal White



XF



MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20



LINEAR

	W	Flux	CCT
Linear 120	35 W	3480 lm	3000K
Linear 180	50 W	5226 lm	3000K
Linear 240	63 W	6968 lm	3000K

DALI / PUSH

Code

1304000A

1305000A

1308000A




APP & PUSH

Code

1304000APP

1305000APP

1308000APP

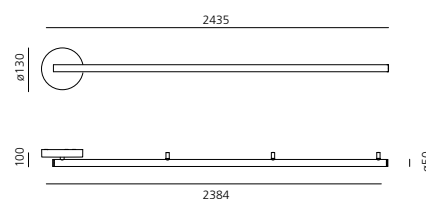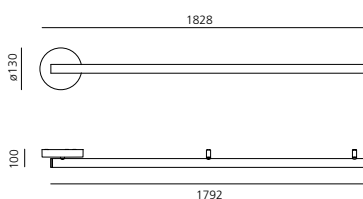

CIRCULAR

	W	Flux	CCT
Circular ø 90	55 W	6040 lm	3000K
Circular ø155	91W	10740 lm	3000K

DALI / PUSH

Code

1306000A



1307000A

APP & PUSH

Code

1306000APP

1307000APP

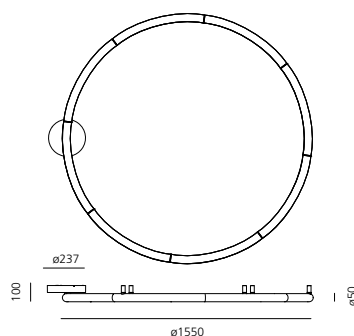

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code

DV1080APP

↪ ALPHABET OF LIGHT - WALL/CEILING SEMI-RECESSED

Opal White



XF




Constant current SELV
driver supplied separately

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20
⊕


LINEAR SEMI-RECESSED

	I	W	Flux	CCT	Code
Linear 120	800mA	29 W	3480 lm	3000K	1425000A
Linear 180	1200mA	44 W	5226 lm	3000K	1426000A
Linear 240	1600mA	58 W	6968 lm	3000K	1427000A

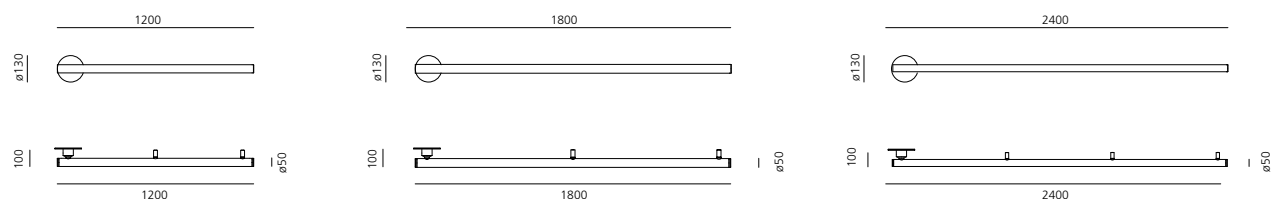

CIRCULAR SEMI-RECESSED

	I	W	Flux	CCT	Code
Circular ø 90	1400mA	50 W	6040 lm	3000K	1428000A
Circular ø155	1200mA +1200mA	86 W	10740 lm	3000K	1429000A

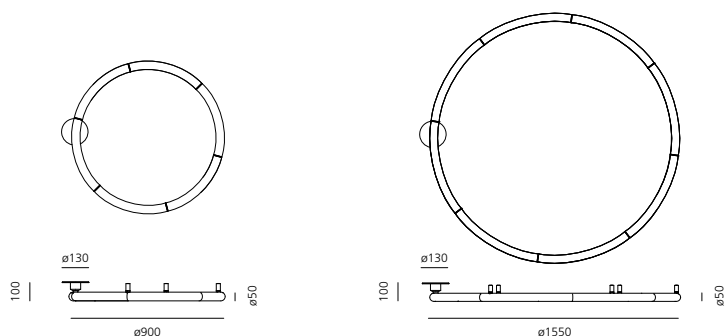

Model	Driver	Vac	Pw	L _{mm}	W _{mm}	H _{mm}		Code
Linear 120	CC 800mA	220-240	35	124	80	22	DALI / 1-10 / PUSH	DV1035
Linear 120	CC 800mA	220-240	35	124	80	22	APP / PUSH	DV1035APP
Linear 180	CC 1200mA	220-240	50	124	80	22	DALI / 1-10 / PUSH	DV1035
Linear 180	CC 1200mA	220-240	50	124	80	22	APP / PUSH	DV1035APP
Linear 240	CC 1600mA	220-240	63	130	76	30	DALI / 1-10 / PUSH	DV1034
Linear 240	CC 1600mA	220-240	63	130	76	30	APP / PUSH	DV1034APP
Circular Ø90	CC 1400mA	220-240	55	130	76	30	DALI / 1-10 / PUSH	DV1034
Circular Ø90	CC 1400mA	220-240	55	130	76	30	APP / PUSH	DV1034APP
Circular Ø155	CC 1200+1200mA	220-240	91	350	80	23	DALI / 1-10 / PUSH	DV1036
Circular Ø155	CC 1200+1200mA	220-240	91	350	80	23	APP / PUSH	DV1036APP





↪ ALPHABET OF LIGHT - SUSPENSION

Opal White



XF



MacAdam 3SDCM
Life L80 (10K) 55000h
CRI =80

IP20
⊕

LINEAR







	W	Flux	CCT
Linear 120	35 W	3484 lm	3000K
Linear 180	50 W	5226 lm	3000K
Linear 240	63 W	6968 lm	3000K

DALI / PUSH

Code
1204000A
1205000A
1208000A

APP / PUSH

Code
1204000APP
1205000APP
1208000APP

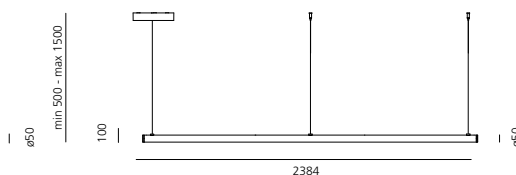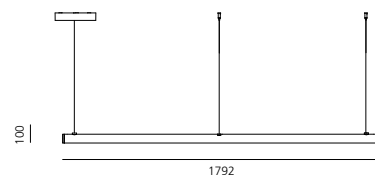

CIRCULAR





	W	Flux	CCT
Circular ø 90	55 W	6040 lm	3000K
Circular ø 155	91W	10740 lm	3000K

DALI / PUSH

Code
1206000A
1207000A

APP / PUSH

Code
1206000APP
1207000APP

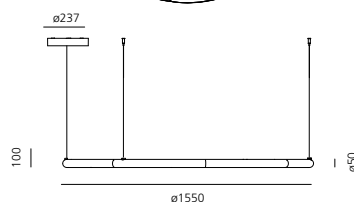

Code

1209100A
1209000A

4.5 m extension feeding cable + 4 suspension wires L=6m for AoL circular Ø155
4.5 m extension feeding cable + 3 suspension wires L=6m for AoL linear 120/180/240
and AoL circular Ø90

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code

DV1080APP












TEATRO ARENA





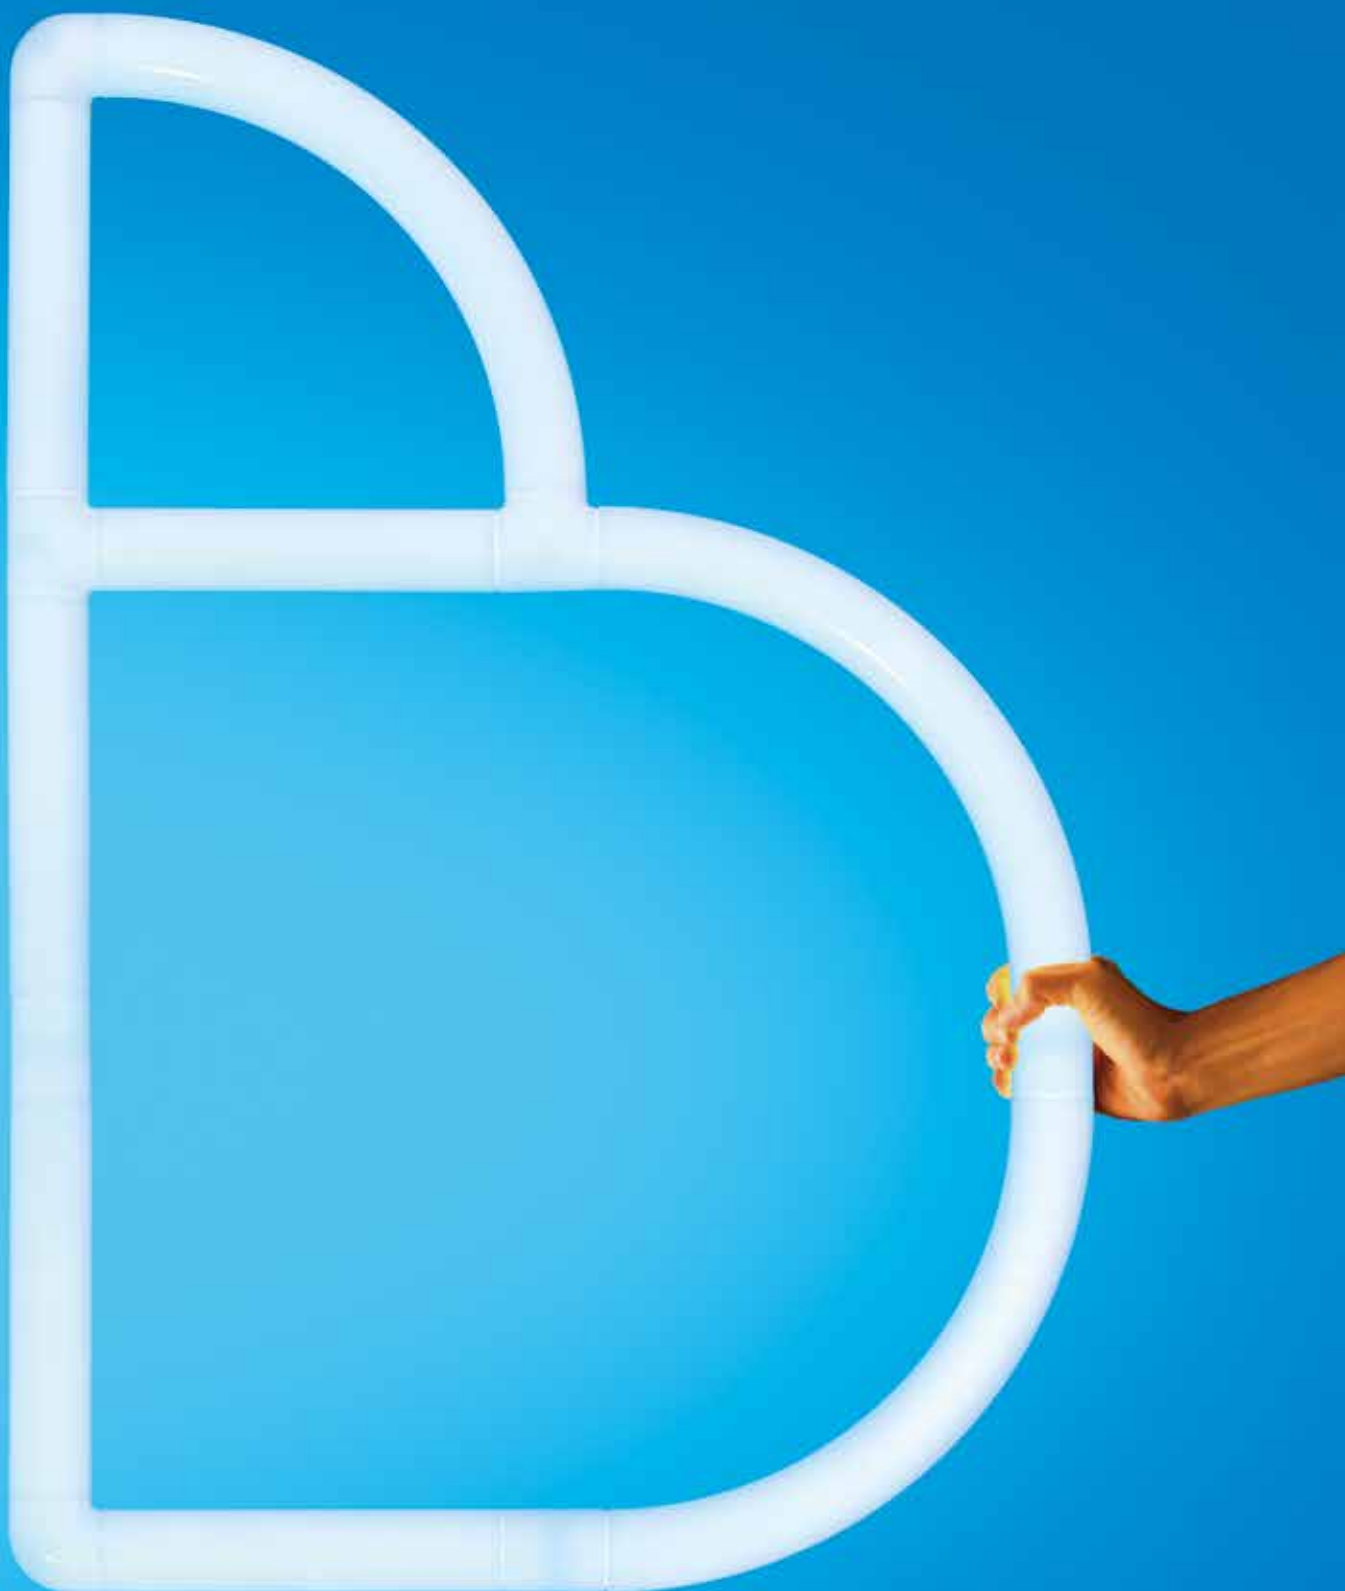


Alphabet of light Letters










os over the lazy dog

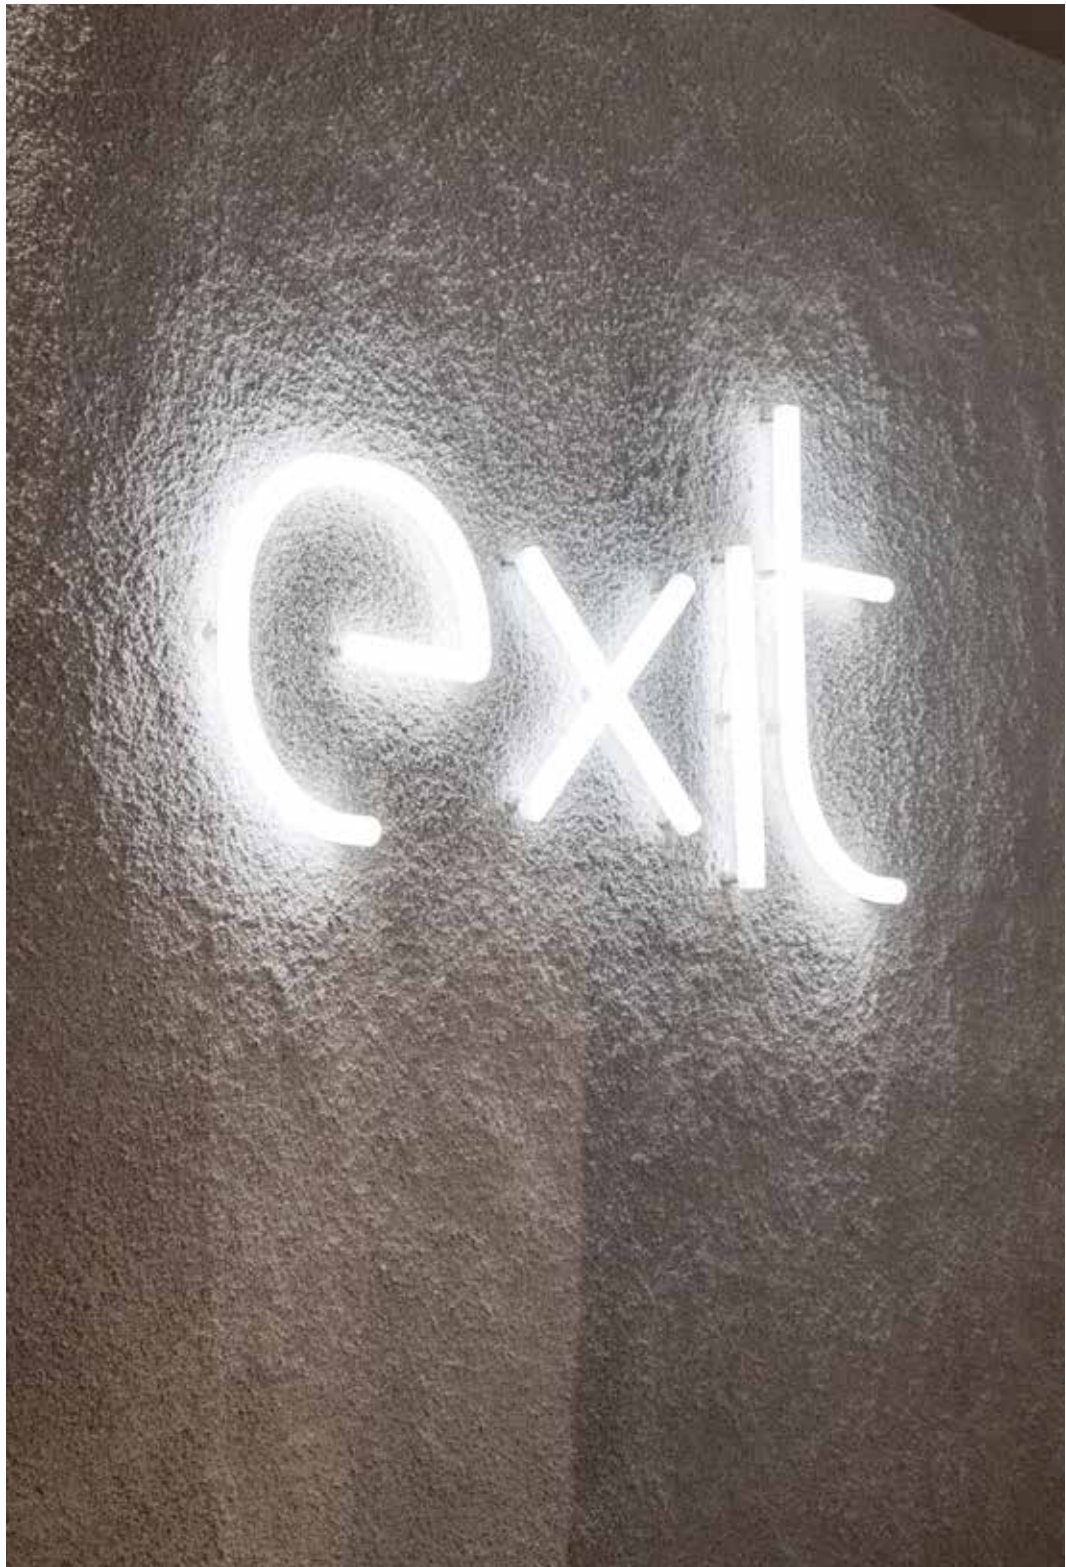



Alphabet of light Letters installation

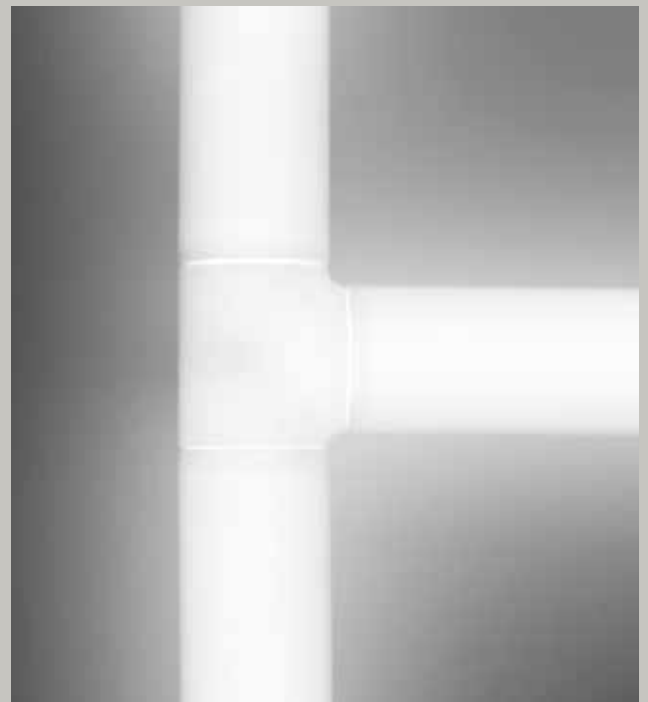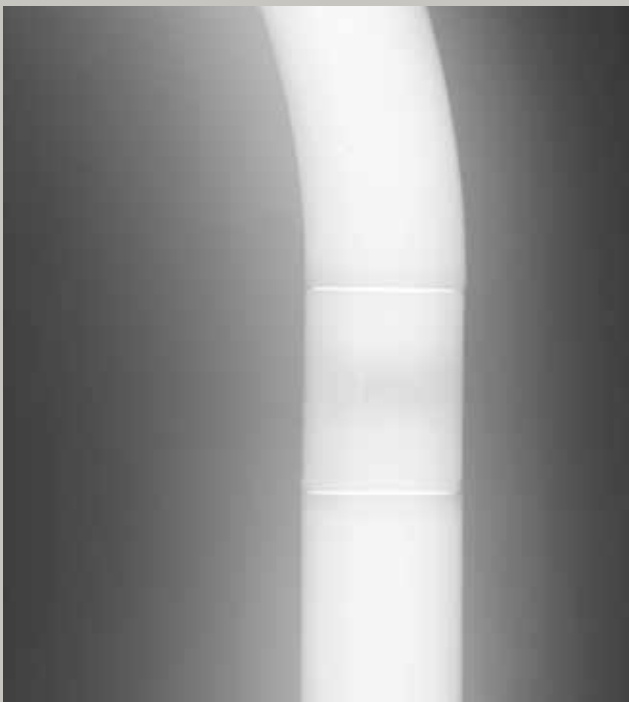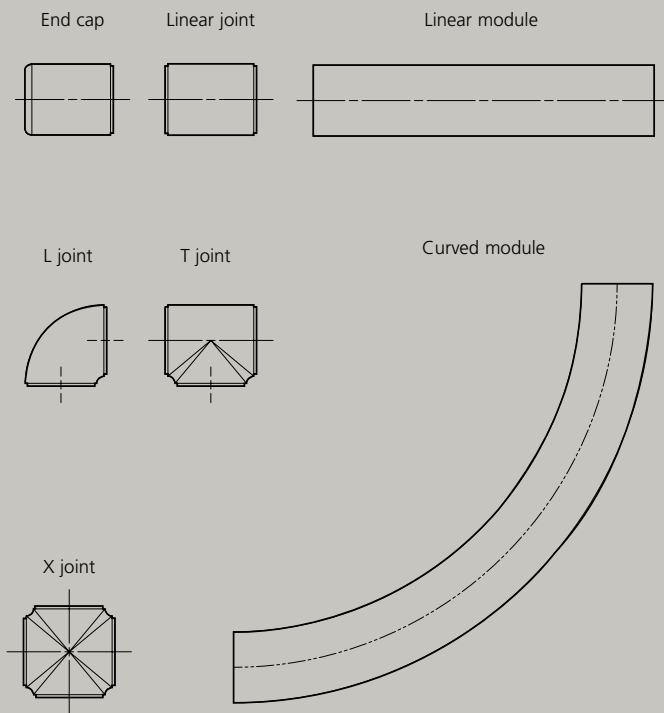


Modules

An entire alphabet composed by 7 elements:
5 joints + 2 constructive modules
with electro - mechanical connections.

→ MDF SUPPORT INSTALLATION

The letters are provided mounted on MDF panels to allow installation on any kind of wall. Installation requires creating a counter-frame to accommodate the drivers, supplied separately, and the power cables.

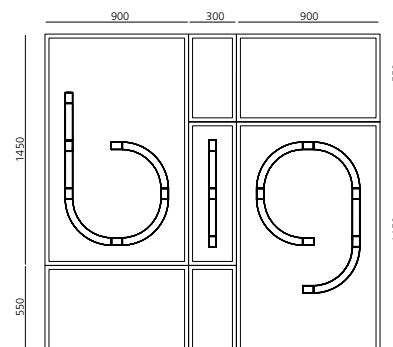

1. Create the supporting frame and provide for power connections for the individual letters.



2. Connect panel b to power source.



3. Fix panel b and connect panel i to power source.



4. Fix panel i and connect panel g to power source.



5. Fix panel g and close using the supplied panels.



6. Complete closing using the supplied panels.



7. Frame ready for finishing.




8. Apply the gauze and plaster flush with the gaps between panels.




9. Final painting.

→ CARDBOARD MOUNTING-SUPPORT INSTALLATION


The letters are provided with a packaging that ensures the right support during the installation process. This type of installation is suitable for existing drywalls that have accessible back space for the housing of drivers (code DV1009) supplied separately and cables (power supply 75 W max - 2 letters or more up to max 85% load).

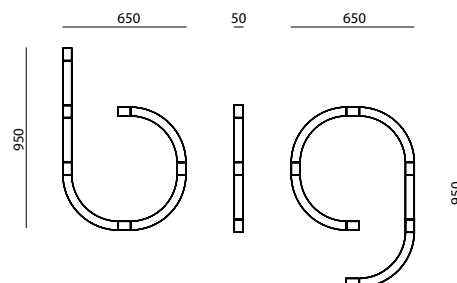


1. Drywall with accessible back space.

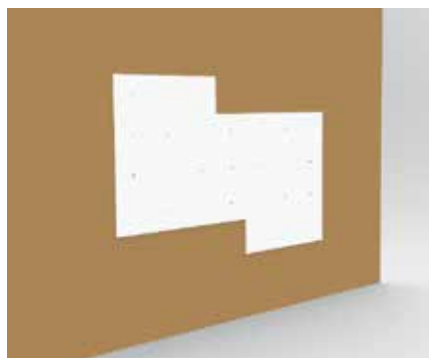

2. Use the provided template to drill the holes and paint the drywall.

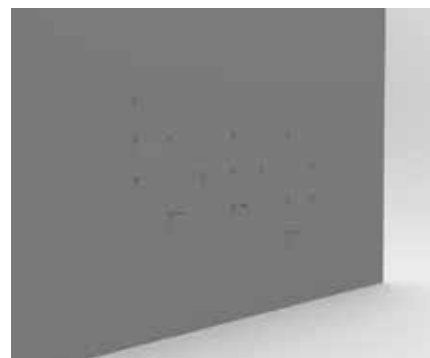

3. Install wall pins, identify output points and prepare wiring connections.

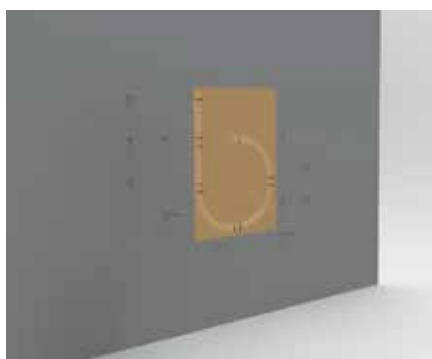

4. Connection of letter b to first wall output.



5. Attachment of letter b on wall pins.




6. Detail of the wall pins fixing.



7. Detail of the wall pins fixing.



8. Removal of the nylon wrapper.

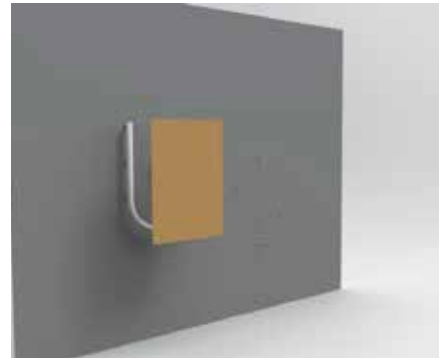

9. Removal of the cardboard support.



10. Connect letter I to first wall output.



11. Fix letter I on wall pins.



12. Removal of the nylon wrapper.



13. Attachment of letter G to first wall output.



14. Removal of the nylon wrapper.



15. Finished.



↪ ALPHABET OF LIGHT - LETTERS

Opal White	XF	24VDC Driver supplied separately.	MacAdam 3SDCM Life L80 (10K) 55000h CRI =80	IP20
				

Size			
Letter	W	Flux	H x L
A	30 W	2011 lm	950 x 650
B	31 W	2156 lm	950 x 650
C	20 W	1296 lm	950 x 650
D	29 W	2011 lm	950 x 650
E	26 W	1651 lm	950 x 650
F	19 W	1221 lm	950 x 650
G	21 W	1366 lm	950 x 650
H	27 W	1721 lm	950 x 650
I	11 W	646 lm	950 x 50
J	21 W	1366 lm	950 x 650
K	26 W	1651 lm	950 x 650
L	17 W	1076 lm	950 x 650
M	38 W	2512 lm	950 x 950
N	25 W	1651 lm	950 x 650
O	27 W	1871 lm	950 x 650
P	27 W	1796 lm	950 x 650
Q	31 W	2086 lm	950 x 650
R	30 W	2011 lm	950 x 650
S	23 W	1511 lm	950 x 650
T	17 W	1076 lm	950 x 650
U	24 W	1581 lm	950 x 650
V	25 W	1651 lm	950 x 650
W	38 W	2512 lm	950 x 950
X	27 W	1721 lm	950 x 900
Y	21 W	1366 lm	950 x 650
Æ	42 W	2727 lm	950 x 950
Ø	36 W	2517 lm	950 x 650
Å	35 W	2372 lm	950 x 650
Z	27 W	1796 lm	950 x 650

Letters	+ MDF Support
1201A00A	1211A00A
1201B00A	1211B00A
1201C00A	1211C00A
1201D00A	1211D00A
1201E00A	1211E00A
1201F00A	1211F00A
1201G00A	1211G00A
1201H00A	1211H00A
1201I00A	1211I00A
1201J00A	1211J00A
1201K00A	1211K00A
1201L00A	1211L00A
1201M00A	1211M00A
1201N00A	1211N00A
1201O00A	1211O00A
1201P00A	1211P00A
1201Q00A	1211Q00A
1201R00A	1211R00A
1201S00A	1211S00A
1201T00A	1211T00A
1201U00A	1211U00A
1201V00A	1211V00A
1201W00A	1211W00A
1201X00A	1211X00A
1201Y00A	1211Y00A
1201AE00A	1211AE00A
1201\$00A	1211\$00A
1201£00A	1211£00A
1201Z00A	1211Z00A

Size			
Letter	W	Flux	H x L
0	27 W	1871 lm	950 x 650
1	23 W	1436 lm	950 x 650
2	28 W	1871 lm	950 x 650
3	24 W	1511 lm	950 x 650
4	23 W	1436 lm	950 x 650
5	29 W	1941 lm	950 x 650
6	25 W	1656 lm	950 x 650
7	19 W	1221 lm	950 x 650
8	33 W	2301 m	950 x 650
9	25 W	1656 lm	950 x 650

Letters	+ MDF Support
1200000A	1210000A
1200100A	1210100A
1200200A	1210200A
1200300A	1210300A
1200400A	1210400A
1200500A	1210500A
1200600A	1210600A
1200700A	1210700A
1200800A	1210800A
1200900A	1210900A

Size			
Letter	W	Flux	H x L
a	20 W	1296 lm	650 x 650
b	23 W	1511 lm	950 x 650
c	17 W	1081 lm	650 x 650
d	23 W	1511 lm	950 x 650
e	20 W	1296 lm	650 x 650
f	16 W	1006 lm	950 x 350
g	25 W	1656 lm	950 x 650
h	23 W	1436 lm	950 x 650
i	8 W	430 m	650 x 50
j	13 W	791 m	950 x 350
k	23 W	1436 lm	950 x 650
l	11 W	646 lm	950 x 50
m	29 W	1866 lm	650 x 950
n	19 W	1221 lm	650 x 650
o	21 W	1441 lm	650 x 650
p	23 W	1511 lm	950 x 650
q	23 W	1511 lm	950 x 650
r	14 W	791 lm	650 x 350
s	21 W	1366 lm	650 x 650
t	17 W	1006 lm	950 x 350
u	19 W	1221 lm	650 x 650
v	18 W	1151 lm	650 x 650
w	24 W	1581 lm	650 x 950
x	15 W	861 lm	650 x 650
y	25 W	1581 lm	950 x 650
æ	32 W	2016 lm	650 x 950
ø	27 W	1871 lm	650 x 650
å	25 W	1656 lm	650 x 650
z	24 W	1581 lm	650 x 650

Letters	+ MDF Support
1202a00A	1212a00A
1202b00A	1212b00A
1202c00A	1212c00A
1202d00A	1212d00A
1202e00A	1212e00A
1202f00A	1212f00A
1202g00A	1212g00A
1202h00A	1212h00A
1202i00A	1212i00A
1202j00A	1212j00A
1202k00A	1212k00A
1202l00A	1212l00A
1202m00A	1212m00A
1202n00A	1212n00A
1202o00A	1212o00A
1202p00A	1212p00A
1202q00A	1212q00A
1202r00A	1212r00A
1202s00A	1212s00A
1202t00A	1212t00A
1202u00A	1212u00A
1202v00A	1212v00A
1202w00A	1212w00A
1202x00A	1212x00A
1202y00A	1212y00A
1202ae00A	1212ae00A
1202\$00A	1212\$00A
1202£00A	1212£00A
1202z00A	1212z00A

Driver									
Driver	Vac	Lmm	Wmm	Hmm	IP	N° device	Code		
75 W	220-240	180	52	30	20	1min-2max	Undimmable	DV1009	





Alphabet of light and Gople system are compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.





Download Artemide App
and find more information on
[artemide.com](https://www.artemide.com)

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

2022 updated version. V.3

Artemide®

artemide.com
2022 10 version