


LED recessed downlight, IP54
Artikel-Nr. 12366073

Licht.
Für Generationen.

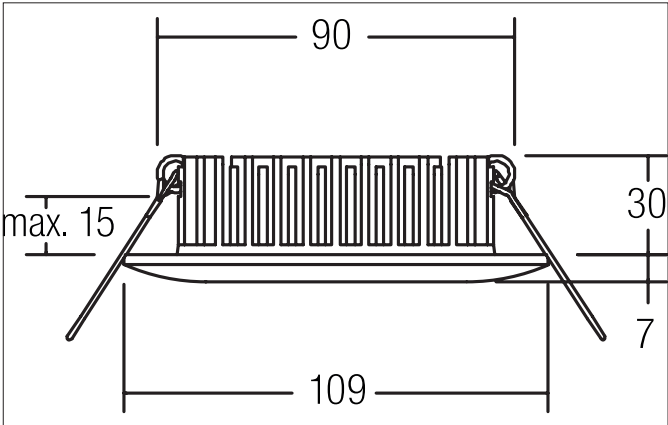

Tender	
LED recessed downlight, IP54, white, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) III, Current: 350 mA, Power: 10W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 750lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 90°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.	

Article data	
Artikel-Nr.	12366073
GTIN	4250047798057
Kurzbeschreibung	LED recessed downlight, IP54
Material	Aluminium / Plastic
Colour	White
Type of surface	Matt
Shape	round
Outer diameter	109 mm
Built-in diameter	90 mm
Installation depth	30 mm
Aufbauhöhe	7 mm
weight	0.209 kg

LED recessed downlight, IP54

Artikel-Nr. 12366073

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	750 lm
System efficiency	75 lm/W
Colour rendering	CRI > 80
Reflector	Without
Beam angle	90 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	10 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP54
Schutzart deckenseitig	IP20
Converter - possible luminaire 1 pc.	17613 17621 17640 17643 17657 17683 17648 17671 17672
Control	Dimming depending on driver
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Plastic, opal

Packing data	
Gross weight	0.29 kg
Length of packaging	135 mm
Packaging width	115 mm
Packaging height	90 mm

LED recessed downlight, IP54

Artikel-Nr. 12366073

Licht.
Für Generationen.

Accessories	
	Artikel-Nr.: 17613000 Kurzbeschreibung: LED converter 350 mA, on/off Leistung: 1 - 15 W Abmessung: 115 mm x 34 mm x 19 mm
	Artikel-Nr.: 17621020 Kurzbeschreibung: LED converter 350 mA, on/off Leistung: 1 - 21 W Abmessung: 128 mm x 50 mm x 13 mm
	Artikel-Nr.: 17640020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 4,2 - 10 W Abmessung: 102 mm x 38 mm x 21 mm
	Artikel-Nr.: 17643020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 8,8 - 18 W Abmessung: 110 mm x 52 mm x 22 mm
	Artikel-Nr.: 17657000 Kurzbeschreibung: LED converter 350 mA, 1-10 V dimmable (analog) Leistung: 5,2 - 18 W Abmessung: 110.5 mm x 52 mm x 22 mm
	Artikel-Nr.: 17683020 Kurzbeschreibung: LED converter 350 mA, DALI dimmable (digital) Leistung: 3,5 - 17 W Abmessung: 110.5 mm x 52 mm x 22 mm
	Artikel-Nr.: 17648020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 0,7 - 17 W Abmessung: 166 mm x 46 mm x 34 mm
	Artikel-Nr.: 17671020 Kurzbeschreibung: LED converter 350mA, ZigBee dimmable Leistung: 3,5 - 18,5 W Abmessung: 146.5 mm x 44 mm x 30 mm
	Artikel-Nr.: 17672020 Kurzbeschreibung: LED converter 350mA, Casambi dimmable Leistung: 3,5 - 18 W Abmessung: 146.5 mm x 44 mm x 30 mm