

sceneCOM UPB4

sceneCOM L, XL (multi-channel)



Product description

- _ DALI input controller
- _ 4 independent inputs for floating contacts
- _ For connecting standard momentary-action switch or switches
- _ Multiple UPB4s possible on the DALI line
- _ Power supply via DALI line
- _ Connection wires according to the terminal colours with 25 cm length included
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacture-guarantee-conditions>)


Website

<http://www.tridonic.com/28002684>



sceneCOM UPB4

sceneCOM L, XL (multi-channel)

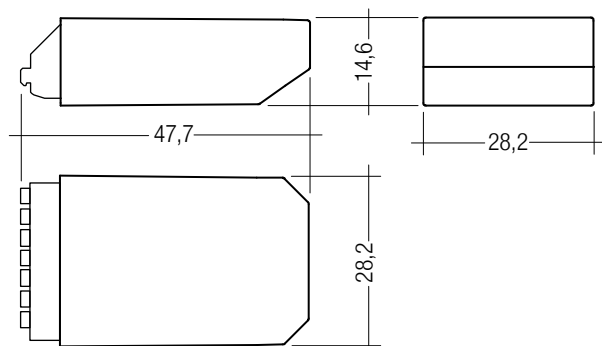

Ordering data

Type	Article number	Packaging, carton	Weight per pc.
UPB4 sC	28002684	125 pc(s).	0.012 kg

Technical data

Supply via	DALI cable
Current draw	6 mA
Input	4 Taster/Schalter
Output	DALI
Ambient temperature t_a	0 ... +60 °C
Storage temperature t_s	-25 ... +80 °C
Humidity	20 ... 90 % not condensed
Starting time	≤ 6 s
Type of protection	IP20
Mounting	Mounting box 60 x 61 (ø x d)
Housing material	PC, halogen-free polycarbonate, non-flammable
Dimensions L x W x H	47.7 x 28.2 x 14.6 mm
Guarantee (conditions at www.tridonic.com)	5 Year(s)

Approval marks

