

I-PYROS LED









Brida
Clamp
Collier



Tapón Ex db
Plug Ex db
Bouchon Ex db



Prensaestopa Ex db
Cablegland Ex db
Presse-étoupe Ex db



APLICACIONES INDICADAS SUITABLE APPLICATIONS APPLICATIONS APPROPRIÉES




Tapas aluminio anodizado resistentes a corrosión y ambientes marinos.

End caps manufactured in anodized aluminum, for marine environments and corrosion resistant.


Embouts en aluminium anodisé résistant à la corrosion et adapté aux environnements marins.

Temperatura ambiente: -20 a +50°C.
Ambient working temperature: -20 a +50°C.
Température de travail : -20 a +50°C.



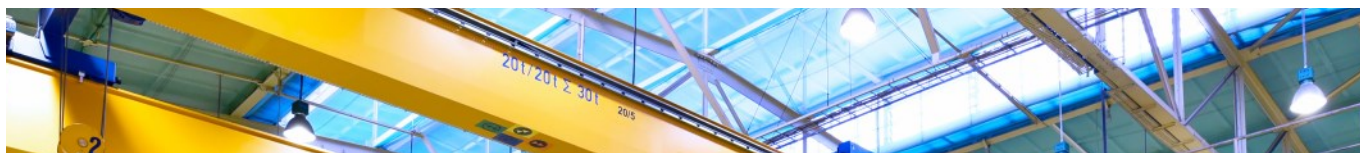

RG1	MACADAM 3/4	UGR ⊙	CR>0	L0B3D > 2.000	IP66 IK10	CE	2014/34/EU Ex II 2GD Ex db IIB+HT6Gb Ex tb IIIC T6Db
------------	-----------------------	-----------------	----------------	-----------------------------------	----------------------------	-----------	--

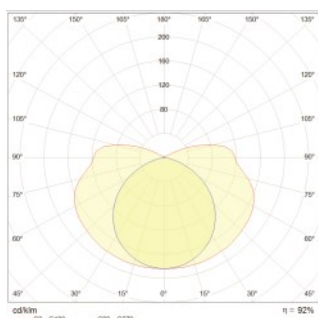

Ref.	Tamaño Size Dimension (mm)	Potencia Power Puissance (W)	Emisión bruta Gross output Flux de la source (Lm)	Tª color Tª colour Tª couleur (°K)	L (mm)	D (mm)	D +brida D + clamp D + fixations (mm)	Embalaje Packaging Emballage
PY223Z	Ø0	12	2.281	4.000	78	10	208	1
PY123	Ø0	24	4.571	4.000	78	10	208	1
PY213	1.200	24	4.571	4.000	1.357	10	208	1
PY223	1.200	48	9.222	4.000	1.357	10	208	1
PY313	1.900	30	5.701	4.000	1.69	10	208	1
PY323	1.900	Ø	11.403	4.000	1.69	10	208	1


ACCESORIOS PYROS LED / PYROS LED ACCESORIES / ACCESSOIRES PYROS LED



PRENSAESTOPA CABLE ARMADO / ARMED CABLEGLAND EX PRESSE-ÉTOUPE ARMÉ EX

Ref.	Tamaño de rosca (R) Thread size Taille du filet (R)			Ø Exterior Ø Outer Ø Extérieur		
	Métrica Metrics Métrique	PG.	NPT	Gas cónica Gas conic Gaz conique	Min.	Max.
EX 507	M25x1,5	21	3/4"	3/4"	9	16

Disponible sistema inteligente inalámbrico Atenea.
Available ATENEA Intelligent Wireless System.

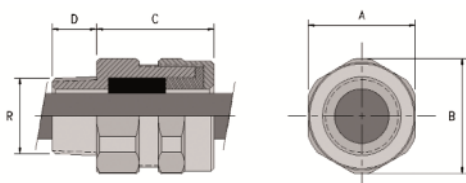

Ex II 2GD Ex db IIC T6

DALI
EMERGENCY
1/3 hrs
(Ta mín = 0°C)


IECEx Certificate Number:
IECEx INE 21.0025X



RG1	MACADAM 3/4	UGR ⊙	CR>0	L0B0 > 2.000	IP66 IK10	CE	2014/34/EU Ex
------------	-----------------------	-----------------	----------------	----------------------------------	----------------------------	-----------	--------------------------------



VERSION OPAL OPAL VERSION VERSION OPALE



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Nettoutput Émission nette	Tª color Tª colour Tª couleur	L	D	D +brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
PY1130	Ø0	12	2.281	176	4.000	78	10	208	1
PY1230	Ø0	24	4.51	352	4.000	78	10	208	1
PY2130	1.200	24	4.51	352	4.000	1.357	10	208	1
PY2230	1.200	48	922	724	4.000	1.357	10	208	1
PY3130	1.900	30	5701	430	4.000	1.69	10	208	1
PY3230	1.900	60	11.403	860	4.000	1.69	10	208	1

ACCESORIOS PYROS LED / PYROS LED ACCESORIES / ACCESSOIRES PYROS LED

FIJACIÓN A BÁCULO / POLE FIXING / POSTE DE FIXATION



Anclaje a poste o báculo mediante doble brida de diámetro según necesidad del cliente.

Pole fixing with double clamp, following customer diameter requirements.

Ancrage au poteau ou au bâton au moyen d'une double bride dont le diamètre dépend des besoins du client.