

LED floodlight without sensor - Professional Line

XLED PRO 240

V2 white

EAN 4007841 068103

Article number 068103



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44



networkable via cable



energy saving

5 years

manufacturer's warranty
steinel-professional.de/garantie



ENEC 05



KEMA KEUR



Light source not exchangeable

Function description

Day-bright illumination throughout: the XLED PRO 240 outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 2124 lm, 3000 K, 19,3 W. Available in black, white and anthracite.

Technical specifications

Dimensions (L x W x H)	161 x 180 x 199 mm	Basic light level function	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Main light adjustable	No
Output	19,3 W	Soft light start	No
Interconnection	No	Impact resistance	IK03
Lichtstrom Gesamtprodukt	2124 lm	IP-rating	IP44
Gesamtprodukt Effizienz	110 lm/W	Protection class	II
Colour temperature	3000 K	Ambient temperature	-20 – 40 °C
Colour variation LED	SDCM3	Housing material	HCMC
With lamp	Yes, STEINEL LED system	Cover material	Plastic, opal
Lamp	LED cannot be replaced	Manufacturer's Warranty	5 years
LED life expectancy (25 °C)	> 60000 h	Installation site	wall, corner
Base	without	Version	white
LED cooling system	HCMC (High Conductive Magnesium Composite)	PU1, EAN	4007841068103
With motion detector	No		


XLED PRO 240

V2 white

EAN 4007841 068103

Article number 068103

Dimension Drawing

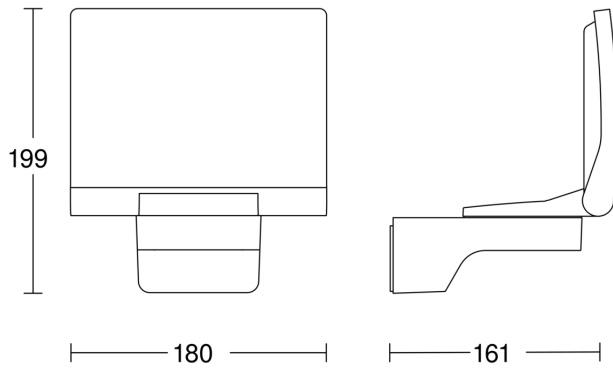

Master/slave interconnection circuit diagram

