

## OTi DALI 80/220-240/24 4CH DT6/8 G3

Optotronic Intelligent - 24 V DALI



### Product family features

- Dimmable via Touch DIM
- Available as single-channel or multi-channel with DT6 and DT8 in one device
- Dimming range: 0.1...100 % (for 50-80-160W) or 1...100 % (for 30W)
- Line frequency: 0 Hz | 50 Hz | 60 Hz

### Product family benefits

- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection "LED Module failure"
- IP rating: IP20

## Areas of application

- Cove lighting, wall washer, corridor, handrail, luminous ceilings
- Suitable for use in luminaires of protection class I and II

## Technical data

### Electrical data


Nominal input voltage	220...240 V
Mains frequency	0/50/60 Hz
Input voltage AC	198...264 V
Input voltage DC	176...276 V
Total harmonic distortion	< 5 %
Power factor $\lambda$	0.89C...0.99
Efficiency in full-load	93% <sup>1)</sup>
Device power loss	6.0 W
Inrush current	46 A
Max. ECG no. on circuit breaker 10 A (B)	9
Max. ECG no. on circuit breaker 16 A (B)	15
Surge capability (L/N-Ground)	2 kV
Surge capability (L-N)	1 kV
Nominal output voltage	24 V <sup>2)</sup>
U-OUT (working voltage)	24.2 V
Output PSTLM	<1
Output SVM	<0.4
Nominal output power	80 W
Maximum output power	80 W <sup>3)</sup>
Galvanic isolation	SELV
Galvanic isolation DALI/mains	Basic
Galvanic isolation DALI/output	Double
Networked standby power	<0.30 W

1) at 230 V, 50 Hz

2) DC voltage

3) at steady state

## Dimensions & weight

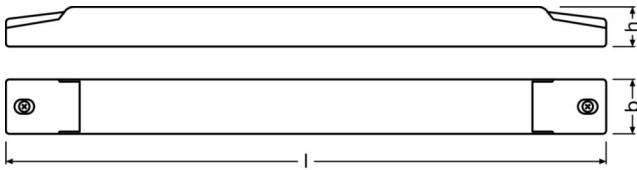

<b>Length</b>	346.0 mm
<b>Width</b>	32.0 mm
<b>Height</b>	22.0 mm
<b>Mounting hole spacing, length</b>	300.6 mm
<b>Cable cross-section, input side</b>	0.5...2.5 mm <sup>2</sup>
<b>Cable cross-section, output side</b>	0.2...1.5 mm <sup>2</sup>
<b>Wire preparation length, input side</b>	6.0 mm
<b>Wire preparation length, output side</b>	5.0 mm
<b>Product weight</b>	191.00 g

## Colors & materials

<b>Casing material</b>	Plastic
<b>Product color</b>	White

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+45 °C
<b>Maximum temperature at tc test point</b>	80 °C
<b>Max.housing temperature in case of fault</b>	110 °C
<b>Temperature range at storage</b>	-40...+85 °C
<b>Permitted rel. humidity during operation</b>	5...85 % <sup>1)</sup>

1) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	50000 h
---------------------	---------

## Capabilities

<b>Programming interface</b>	DALI
<b>Dimmable</b>	Yes
<b>Dimming interface</b>	DALI-2 / Corridor / Touch DIM
<b>Dimming range</b>	0.1...100 %
<b>Dimming method</b>	Pulse Width Modulation
<b>DALI-2 Diagnostic Data</b>	No
<b>DALI-2 Energy Data</b>	No
<b>Max. cable length to lamp/LED module</b>	50 m <sup>1)</sup>
<b>Suitable for fixtures with prot. class</b>	I / II
<b>Suitable for emergency lighting</b>	Yes
<b>Type of connection, input side</b>	Screw terminal
<b>Type of connection, output side</b>	Screw terminal
<b>Number of channels</b>	4
<b>Overheating protection</b>	Automatic reversible
<b>Overload protection</b>	Automatic reversible
<b>Short-circuit protection</b>	Automatic reversible
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Yes

1) Output wires must be routed as close as possible to each other

## Programming

Tuner4TRONIC	Yes
--------------	-----

## Programmable features

DALI-2 Luminaire Data	No
TouchDIM + Sensor	Yes
Corridor Functionality	Yes

## Certificates & standards

Approval marks – approval	BIS / CCC / EAC / EL / ENEC 10 / RCM / VDE
Standards	EN 55015 / EN 60598-2-22 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547 / EN 62384 / EN 62386
Type of protection	IP20

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	31-03-2026
Primary Article Identifier	4062172274302   6977770431942
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

## Equipment / Accessories

- Suitable for 24 V LED modules

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

---

## Download Data

File		
User instruction	PDF	▶OTi DALI 50 80 24 1-4CH UI G15130923 040725

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6977770431942 INVENTRONICS	OTi DALI 80/220-240/24 4CH DT6/8 G3	Shipping carton box 20 Pieces	371 x 171 x 105 mm	6.66 dm <sup>3</sup>	199.44 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.