

NiCd Accus 1.6 – 4.5 Ah

Nickel-Cadmium cells (NiCd)



Product description

- _ High-temperature NiCd cells for use with emergency lighting unit
- _ 4-year design life
- _ 1-year guarantee

Properties

- _ Constant high-temperature operation – depending on the emergency lighting unit used (refer to respective emergency control gear data sheet)
- _ Good charging properties at high temperature
- _ High energy maintenance of the charged battery
- _ Certified quality manufacturer
- _ In various configurations
- _ Simple connection with blade terminal respectively plug terminal
- _ With polycarbonate fixing caps and connecting cable
- _ Electrical connection with mounted end caps possible
- _ Suitable for emergency lighting equipment as per IEC 60598-2-22

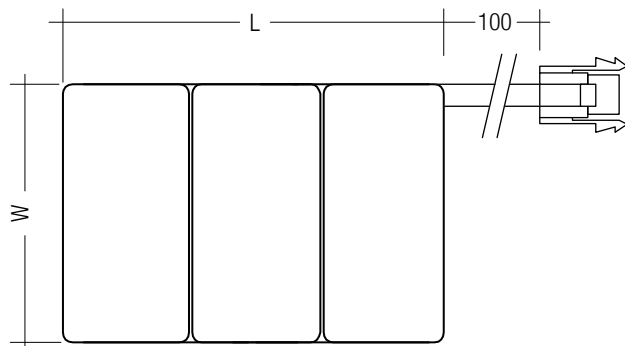
Website

<http://www.tridonic.com/89800385>



NiCd Accus 1.6 – 4.5 Ah

Nickel-Cadmium cells (NiCd)

**Ordering data**

Type	Article number ^①	Capacity	Packaging, carton	Packaging, outer box	Weight per pc.
NiCd D cells – side by side					
Accu-NICD 4B 55	89800385	4.5 Ah	5 pc(s).	25 pc(s).	0.460 kg

Technical data

Battery voltage per cell	1.2 V
Min. battery casing temp. (design life of 4 years)	+ 5 °C
Max. battery casing temp. (design life of 4 years)	Refer to emergency control gear datasheet

Approval marks**Standards**

Acc. to EN 60598-2-22

Specific technical data

Type	Article number ^①	Figure	Number of cells	Capacity	Length L	Hole spacing D	Width B	Height H
NiCd D cells – side by side								
Accu-NICD 4B 55	89800385	4	4	4.5 Ah	63 mm	64 x 40 mm	131 mm	35 mm

① Art. no. 89895960, 89895963, 89895973, 89895978 on request.