LED floodlight without sensor

XLED home 2 M

V2 white EAN 4007841 033125 Article number 033125







30 years (Ø 4,5h / day)

3000 K



IP44











5 years





Function description

Dazzlingly stylish LED floodlight. XLED home 2 M – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	13,7 W
Power consumption	0,5 W
Lichtstrom Gesamtprodukt	1550 lm
Gesamtprodukt Effizienz	113 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10

Base	without
LED cooling system	HCMC (High Conductive Magnesium Composite)
With motion detector	No
Photo-cell controller	No
Impact resistance	IK00
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	НСМС
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Installation site	wall, corner
Version	white
PU1, EAN	4007841033125


LED floodlight without sensor

XLED home 2 M


V2 white EAN 4007841 033125 Article number 033125



Dimension Drawing

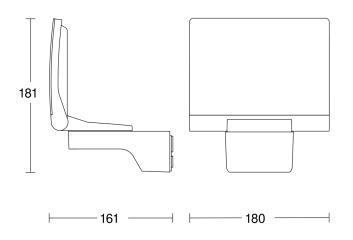

Light Distribution Curve

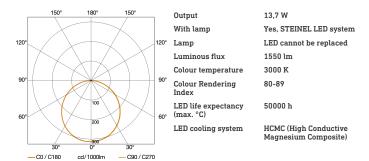

Master/slave interconnection circuit diagram

