

## Sensor-switched outdoor light

# L 190 S

white

EAN 4007841 644512

Article number 644512



Max. 100 W



infrared sensor  
180°



max. 12 m



IP44



2 - 2000 lux



5 sec - 15 min



manual override  
4h



ideal 2 m



energy saving

3 years

manufacturer's  
warranty  
steinel.de/garantie3y

### Function description

Timelessly elegant in every detail. Classic outdoor SensorLight L 190 S, ideal for prestigious outdoor spaces, 180° angle of coverage, reach can be set up to 12 m or up to 5 m, durable, lavishly ornamented die-cast aluminium, basic light-level function and soft light start.

### Technical specifications

Dimensions (L x W x H)	147 x 217 x 335 mm
Mains power supply	230 – 240 V / 50 Hz
Sensor Technology	passive infrared
Output	100 W
Power consumption	0,8 W
Interconnection	No
Slave modeselectable	No
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	180 °
Angle of aperture	90 °
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 5 m (39 m <sup>2</sup> )
Reach, tangential	r = 12 m (226 m <sup>2</sup> )
Continuous light	selectable, 4h

Photo-cell controller	Yes
Twilight setting	2 – 200 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Installation site	wall
Cover material	shrouds
Version	white
PU1, EAN	4007841644512

Sensor-switched outdoor light

# L 190 S

white

EAN 4007841 644512


Article number 644512



## Accessories

EAN 4007841 000813	Glass set for L 190 S
EAN 4007841 002190	Replacement base unit for L 170 / L 190 S

## Detection Zone

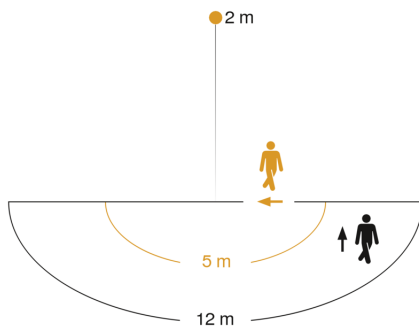

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

