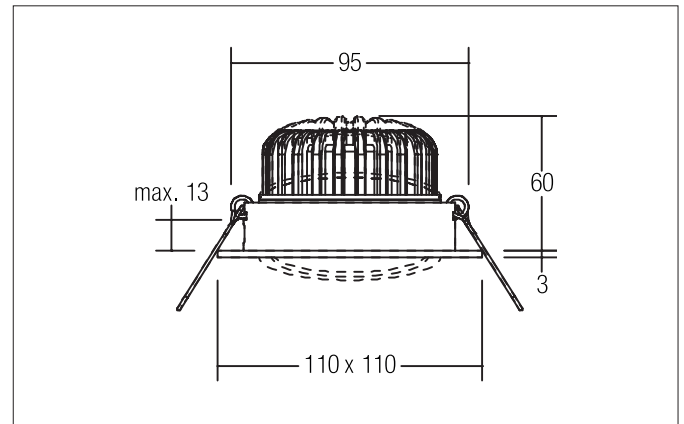


LED recessed spot, dim2warm

Artikel-Nr. 12492083

Licht.
Für Generationen.**Tender**

LED recessed spot, dim2warm, black, square. In a compact design, for installation in tool-less rapid assembly systems. If the lamp is dimmed, the color temperature is reduced. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 12W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 880lm, Colour temperature: from 1.800 K up to 3.000 K, Beam angle: 38°, Adjustability: Pivoted, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	12492083
GTIN	4251433946380
Kurzbeschreibung	LED recessed spot, dim2warm
Material	Aluminium / Glass
Colour	Black
Type of surface	Glossy
Shape	square
Built-in diameter	95 mm
Installation depth	60 mm
Length	110 mm
Width	110 mm
weight	0.283 kg

LED recessed spot, dim2warm

Artikel-Nr. 12492083


Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K - 1800 K
Light colour	White
Light output	Direct
Luminous flux	880 lm
System efficiency	73 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	12 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17664
Control	Dimming depending on driver
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	15°
Further references	No mounting box No cover with thermal insulation material
Material cover	Glass transparent

Packing data	
Gross weight	0.332 kg
Length of packaging	135 mm
Packaging width	70 mm
Packaging height	120 mm

Accessories	
	Artikel-Nr.: 17664020
	Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable
	Leistung: 10,2 - 14 W
	Abmessung: 125 mm x 51 mm x 20 mm