


RS PRO P2 EM flat S

Emergency light - neutral white
 EAN 4007841 069711
 Article number 069711

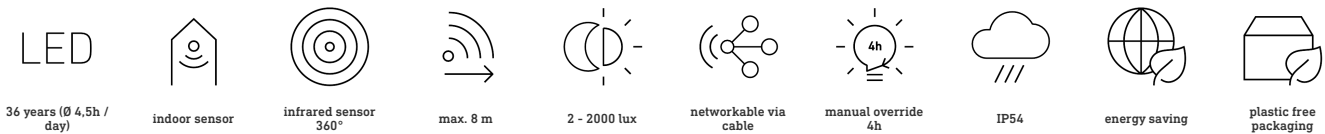

Function description

A perfect solution for the right light in the right place. Today, indoor lighting solutions are in demand that not only provide the last word in convenience and intelligent technology but also integrate harmoniously into the particular interior design. We have found the perfect answer in the RS PRO LED P series. Timeless design and very easy installation combined with pioneering technology and maximum efficiency. Because with the virtually invisible 360-degree high-frequency sensor always switching the 15,4 W LED lighting system ON reliably, the indoor light is a real bonus for any building, both from the aspect of aesthetic appeal as well as cost-efficiency. The new slave versions are quickly and easily interconnected via cable.


Technical specifications

Dimensions (Ø x H)	322 x 68 mm	Electronic scalability	Yes
Mains power supply	220 – 240 V / 50 – 60 Hz	Mechanical scalability	No
Sensor Technology	High frequency	Twilight setting	2 – 2000 lx
Output	15,4 W	Time setting	5 s – 15 Min.
Interconnection	Yes	Basic light level function	Yes
Interconnection via	Cable	Basic light level function time	10/30 min, all night
Lichtstrom Gesamtprodukt	1700 lm	Soft light start	Yes
Luminous flux, emergency light	38 lm	Impact resistance	IK03
Gesamtprodukt Effizienz	110 lm/W	IP-rating	IP54
Colour temperature	4000 K	Protection class	II
Colour Rendering Index	80-89	Ambient temperature	-10 – 30 °C
With lamp	Yes, STEINEL LED system	Housing material	Plastic
Lamp	LED cannot be replaced	Cover material	Plastic, opal
LED life expectancy (max. °C)	50000 h	Manufacturer's Warranty	5 years
Drop in luminous flux in accordance with LM80	L80B10	Version	Emergency light - neutral white
Base	without	Total harmonic distortion (THD)	16,9
LED cooling system	Passive Thermo Control	Power factor	0,96
With motion detector	Yes	Photobiological safety in accordance with EN 62471	RG1
Detection angle	360 °	PU1, EAN	4007841069711

RS PRO P2 EM flat S


Emergency light - neutral white
 EAN 4007841 069711
 Article number 069711

Detection Zone

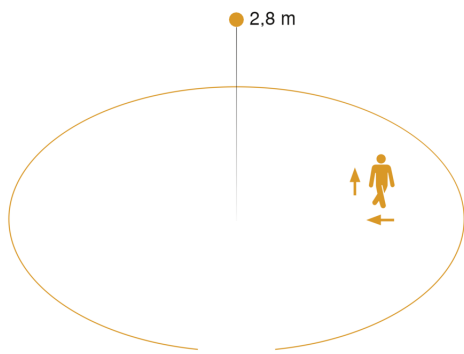


Mögliche Montagehöhe: 2,00 m – 4,00 m
 Orange: radial und tangential

Dimension Drawing

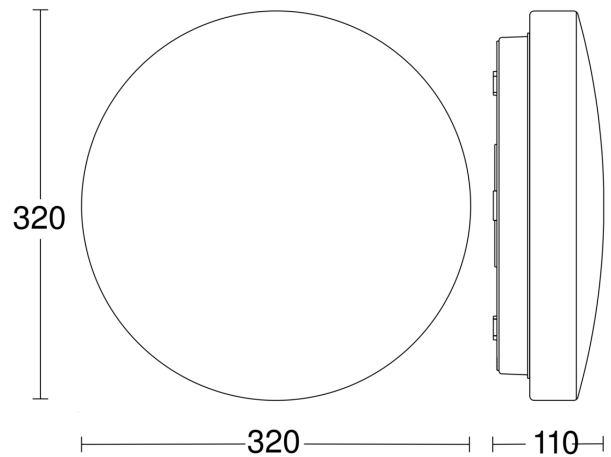


Light Distribution Curve



Output	15,4 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1700 lm
Colour temperature	4000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Sensor-switched LED indoor light - Professional Line

RS PRO P2 EM flat S

Emergency light - neutral white

EAN 4007841 069711

Article number 069711



Master/master interconnection circuit diagram

