
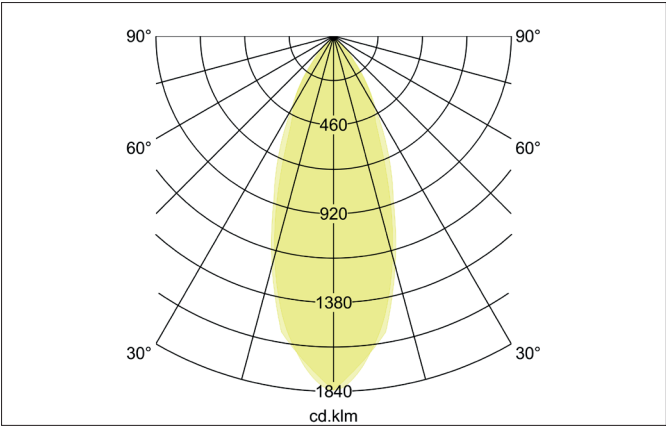


LED recessed spot set, on/off  
Artikel-Nr. 38 143633

Licht.  
Für Generationen.

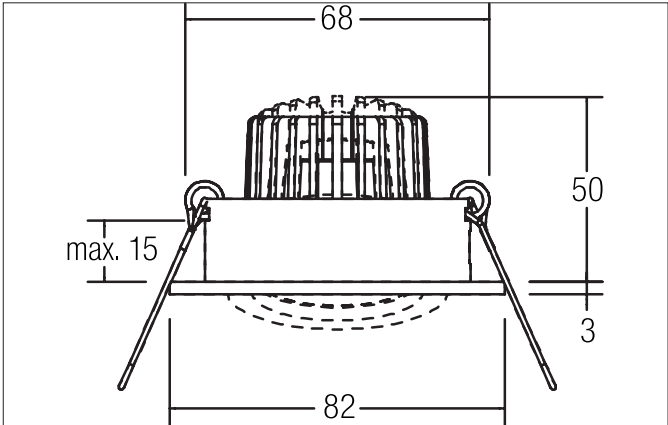

**Tender**  
LED recessed spot set, on/off, champagne, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: on/off.

| Article data       |                               |
|--------------------|-------------------------------|
| Artikel-Nr.        | 38 143633                     |
| GTIN               | 4251433906674                 |
| Kurzbeschreibung   | LED recessed spot set, on/off |
| Material           | Aluminium / Glass             |
| Colour             | Champagne                     |
| Type of surface    | Matt                          |
| Shape              | round                         |
| Outer diameter     | 82 mm                         |
| Built-in diameter  | 68 mm                         |
| Installation depth | 50 mm                         |
| weight             | 0.176 kg                      |

**LED recessed spot set, on/off**

Artikel-Nr. 38143633

Licht.  
Für Generationen.

| Lighting technology |            |
|---------------------|------------|
| Colour temperature  | 3000 K     |
| Light colour        | White      |
| Light output        | Direct     |
| Luminous flux       | 680 lm     |
| System efficiency   | 113 lm/W   |
| Colour rendering    | CRI > 80   |
| Reflector           | High-gloss |
| Reflektorfarbe      | silver     |
| Beam angle          | 38 °       |
| Light sharing       | Symmetric  |

| Operating technology of the luminaires |        |
|----------------------------------------|--------|
| System output                          | 6 W    |
| Voltage type                           | AC     |
| AC nominal voltage max                 | 230 V  |
| Frequenz max.                          | 50 Hz  |
| Lamp                                   | LED    |
| Protection class                       | II     |
| Degree of protection                   | IP20   |
| Control                                | on/off |
| Leuchtmittelwechsel möglich            | ja     |

| Operating technology of driver |        |
|--------------------------------|--------|
| AC nominal voltage max         | 230 V  |
| Frequenz max.                  | 50 Hz  |
| Protection class               | II     |
| Degree of protection           | IP20   |
| Control                        | on/off |

| Mounting technology   |                                           |
|-----------------------|-------------------------------------------|
| Mounting method       | Recessed mounting                         |
| Place of installation | Ceiling-mounted                           |
| Adjustability         | Pivoted                                   |
| Swivel angle          | 20°                                       |
| Further references    | No cover with thermal insulation material |
| Material cover        | Glass transparent                         |
| Circlip               | Without circlip                           |

| Packing data        |         |
|---------------------|---------|
| Gross weight        | 0.25 kg |
| Length of packaging | 95 mm   |
| Packaging width     | 75 mm   |
| Packaging height    | 95 mm   |