


2.10

WATEX



LED





PC



PCO





RAB/BAR/RAB



ZONA
2-22
«nR»

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

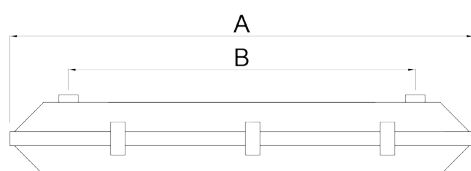

IT - DE



IP66

IK08




2014/34/EU



II 3GD
Ex nR IIC T5 Gc
Ex tb IIIC T100°C Dc



1 MODULO LED / 1 LED MODULE / MODULE LED

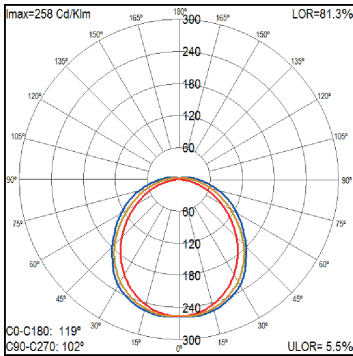


Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
EW113	600	13	1490	1210	3000	664	260	100	110
EW114	600	13	1550	1259	4000	664	260	100	110
EW123	600	16	2560	2079	3000	664	260	100	110
EW124	600	16	2670	2168	4000	664	260	100	110
EW213	1200	24	2980	2420	3000	1274	870	100	110
EW214	1200	24	3200	2598	4000	1274	870	100	110
EW223	1200	32	5120	4157	3000	1274	870	100	110
EW224	1200	32	5340	4336	4000	1274	870	100	110
EW313	1500	29	3720	3021	3000	1575	650	100	110
EW314	1500	29	4000	3248	4000	1575	650	100	110
EW323	1500	40	6310	5124	3000	1575	650	100	110
EW324	1500	40	6700	5440	4000	1575	650	100	110

2.10

WATEX

2 MODULOS LED / 2 LED MODULES / 2 MODULES LED

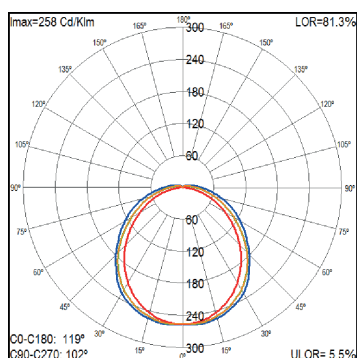














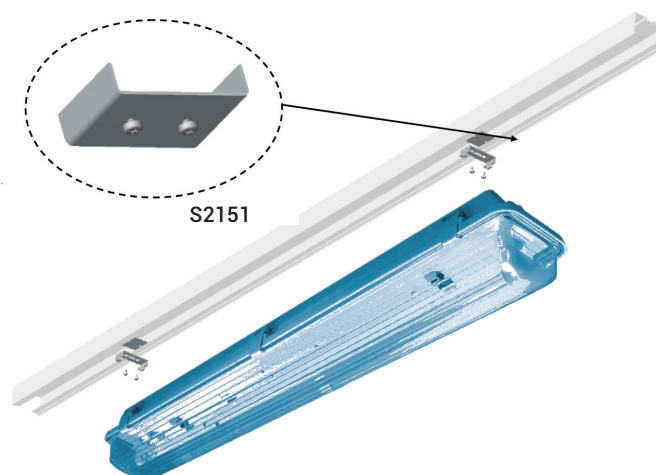















































Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
EY113	600	24	2980	2420	3000	664	260	160	110
EY114	600	24	3200	2598	4000	664	260	160	110
EY123	600	32	5120	4157	3000	664	260	160	110
EY124	600	32	5340	4336	4000	664	260	160	110
EY213	1200	48	5960	4840	3000	1274	870	160	110
EY214	1200	48	6400	5197	4000	1274	870	160	110
EY223	1200	64	10240	8315	3000	1274	870	160	110
EY224	1200	64	10680	8672	4000	1274	870	160	110
EY313	1500	58	7440	6041	3000	1575	650	160	110
EY314	1500	58	8000	6496	4000	1575	650	160	110
EY323	1500	80	12620	10247	3000	1575	650	160	110
EY324	1500	80	13400	10881	4000	1575	650	160	110

ACCESORIOS WATEX / WATEX ACCESORIES / ACCESSOIRES WATEX

1-10
DALI

EMERGENCY
1h / 3h



 PC	Cuerpo luminaria tubo policarbonato Polycarbonate luminaire body Corps du luminaire tube polycarbonate	 Al	Cuerpo extrusion Aluminum body Corps aluminium	 +40°C -20°C	Rango de temperaturas Temperatures range Tranche de temperatures
 PMMA	Cuerpo luminaria metacrilato Methacrylate luminaire body Corps du luminaire méthacrylate	 AP/LSB/AL	Cuerpo Acero Prelacado Pre-lacquered steel body Corps en acier prélaqué	 650°C	Ensayo hilo Glow wire test Essais fil incandescent
 BG	Cuerpo luminaria vidrio borosilicato Glass borosilicate luminaire body Corps du luminaire verre borosilicate	 CAP/LSB/CAL	Cuerpo Aluminio Prelacado Pre-lacquered aluminum body Corps en aluminium prélaqué		Alto factor High Factor Hautes temperatures
 ABS	Cuerpo luminaria ABS ABS luminaire body Corps du luminaire ABS	 ABS	Cuerpo ABS ABS body Corp ABS		Conector rápido Quick Connector Connecteur rapide
 PS	Cuerpo luminaria poliestireno Polystyrene luminaire body Corps du luminaire polystyrène	 PC	Difusor Policarbonato Polycarbonate Diffuser Diffuseur Polycarbonate	 x2 M25	Entrada cablesroca M25 (2e) M25 Cable entry (2e) Entrée de câbles a vis M25 (2e)
 AL	Cuerpo aluminio Extrusion Aluminum Body Corps extrusión aluminium	 PCO	Difusor Policarbonato Opal Opal Polycarbonate Diffuser	 1-10 DALI	Regulación de flujo Dimmable equipment Ballast gradable
 FE	Cuerpo hierro Iron body Corps fer	 PS	Difusor Poliestireno Polystyrene Diffuser Diffuseur Polystyrène	 LED	Módulo LED LED Module Modules LED
 AL RAL 7047	Tapas Aluminio pintado Painted Aluminum end caps Embouts aluminium peint	 PC/ACRIL	Difusor PC/ACRIL PC/ACRIL Diffuser Diffuseur PC/ACRIL	 LED	Tubo LED LED Tube Tube LED
 SS 304	Tapa acero INOX Stainless Steel 304 end caps Embouts INOX 304	 ABS	Lamas ABS ABS louvers Lames ABS	 FLUO	Tubo fluorescencia Fluorescent Tube Tube Fluorescent
 SS 316	Tapa acero INOX Stainless Steel 316 end caps	 ABS o PC	Lamas ABS - PC ABS - PC louvers Lames ABS - PC	 LED/FLUO	Tubo LED o Tubo fluorescente LED Tube or fluorescent tube Tube LED ou Tube fluorescent
 ABS	Tapas ABS ABS Plastic end caps Embouts PLASTIQUE ABS	 x2 AC/GS/ZM	Abrazaderas acero cincado Galvanized Steel Clamps Fixations acier zingué		Fuente de luz Light source Source de lumière
 PC	Tapas Policarbonato PC Plastic end caps Embouts PLASTIQUE PC	 x2 Al/SS/INOX	Abrazaderas acero inox Stainless Steel Clamps Fixations INOX	 2GH / TC-L	Fuente de luz Light source Source de lumière
 M-ABS	Tapas Plástico Metalizado Metalized Plastic end caps Embouts PLASTIQUE CHROMÉ	 x2 AICR/FOSS/IOG	Abrazaderas cierre rápido Quick opening stainless steel Fixations INOX ouverture à grenouillère	 TC-DEL TC-D	Fuente de luz Light source Source de lumière
 ZAMAK-Ni	Tapas Zamak Niquelado Nickel-plated ZAMAK end caps Embouts ZAMAK NICKELÉ	 x2 PCA/APC/PCA	Abrazaderas PC antivandálica Vandalism PC Clamps Fixations INOX ouverture à grenouillère	 ZONA 0	Zona ATEX EX Area ATEX Zone
 A-Ni	Tapas acero niquelado Nickel-plated steel end caps Embouts Acier Nickelé	 x2 ABS	Abrazaderas ABS ABS Clamps Fixations PMMA antivandalisme	 4,8V-4,0Ah	Sistema de emergencia Emergy System Sisteme d'emergencia
 AL ANODIZING	Aluminio Anodizado Anodized aluminum Aluminium anodisé	 ABS	Aro ABS ABS Ring Fixations ABS	 RG1	Grupo de riesgo fotobiológico Photobiological risk group Group de risque fotobiologique
 RAB/BAR/RAB	Reflector Aluminio brillo Reflector Aluminum Gloss Réflecteur Aluminium brillant	 STEEL	Abrazaderas techo o pared Ceiling or wall Clamps Fixations murs et parois	 MACADAM 3/4	Índice MacAdam MacAdam Ellipse Taux MacAdam
 CB/WL/TAB	Reflector chapa lacada blanca White lacquered steel Reflector Réflecteur tôle laquée blanc	 PG11	Prensaestopa Cable Gland Presse étoupes	 UGR <19	Índice de deslumbramiento unificado Unify glare rating Taux d'éblouissement
 AB/WS/AB	Reflector acero lacado blanco White Lacquered Steel Reflector Réflecteur acier laqué blanc		Empotrable para lámpara Embedded for lamps Encastrable pour lamp	 CR > 80	Índice cromático Chromatic Index Taux chromatique
 AG/GS/AG	Reflector acero galvanizado Galvanized Steel Reflector Réflecteur acier galvanisé	 Ø18mm	Brida suspensión perforación 18mm Clamps suspension borehole 18 mm Fixation avec suspension perforation 18 mm	 L70B50 > 50.000	Vida útil Useful life Durée de vie