

# RS PRO P2

Neutral white

EAN 4007841 056087

Article number 056087



Light source not exchangeable



Control gear not exchangeable

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the version with sensor by cable. Output: 14,1 W with 1708 lm, 4000 K.

## Technical specifications

Dimensions (Ø x H)	320 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	14,1 W
Lichtstrom Gesamtprodukt	1708 lm
Gesamtprodukt Effizienz	121 lm/W
Colour temperature	4000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without

LED cooling system	Passive Thermo Control
With motion detector	No
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841056087

# RS PRO P2


Neutral white

EAN 4007841 056087


Article number 056087



## Dimension Drawing

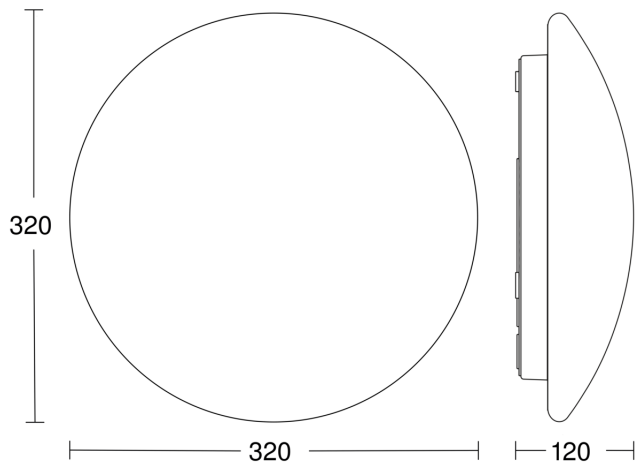


## Light Distribution Curve



Output	14,1 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1708 lm
Colour temperature	4000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

## Slave/wireless master interconnection circuit diagram



## Master/slave interconnection circuit diagram

