


Sensor-switched outdoor light

L 115 S

white
 EAN 4007841 657413
 Article number 657413

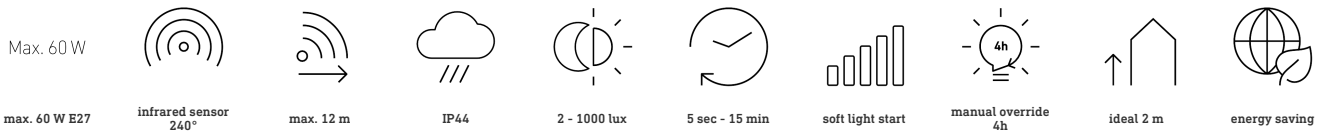

Function description

Bright individual. Sensor-switched outdoor light L 115 S, ideal for building fronts and building entrances, 240° angle of coverage, reach up to 12 m, selectable time and twilight threshold, basic light-level function.

Technical specifications

Dimensions (L x W x H)	257 x 215 x 330 mm	Photo-cell controller	Yes
Mains power supply	230 – 240 V / 50 – 60 Hz	Twilight setting	2 – 1000 lx
Sensor Technology	passive infrared	Time setting	5 s – 15 Min.
Output	60 W	Basic light level function	Yes
Power consumption	0,7 W	Soft light start	Yes
Interconnection	No	Impact resistance	IK03
Slave modeselectable	No	IP-rating	IP44
With lamp	No	Protection class	II
Lamp	All-purpose lamp	Ambient temperature	-20 – 50 °C
Base	E27	Housing material	Plastic
With motion detector	Yes	Cover material	Glass transparent
Detection angle	240 °	Manufacturer's Warranty	3 years
Angle of aperture	120 °	Settings via	Potentiometers
Capability of masking out individual segments	Yes	With remote control	No
Electronic scalability	No	Installation site	wall
Mechanical scalability	No	Cover material	shrouds
Reach, radial	r = 5 m (52 m ²)	Version	white
Reach, tangential	r = 12 m (302 m ²)	PU1, EAN	4007841657413
Continuous light	selectable, 4h		

Sensor-switched outdoor light

L 115 S

white

EAN 4007841 657413


Article number 657413



Accessories

EAN 4007841 001681 Replacement glass shade for L 115 S

Detection Zone

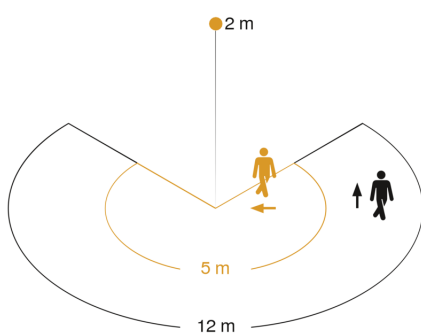

Mögliche Montagehöhe: 1,80 m – 6,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

