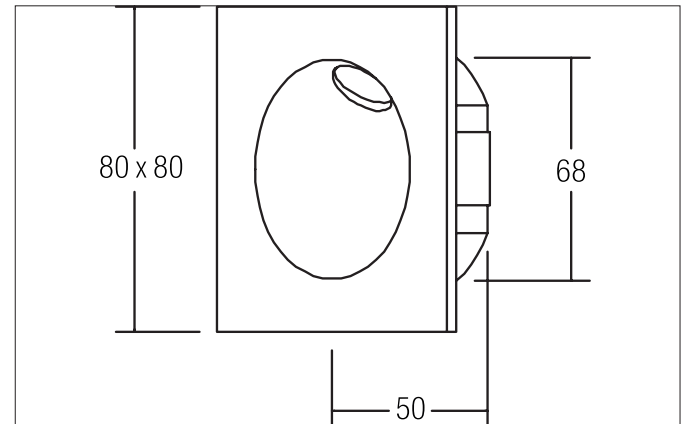


LED wall recessed light, IP54

Artikel-Nr. 10058173

Licht.
Für Generationen.**Tender**

LED wall recessed light, IP54, white, square. Recessed mounting, Wall-mounted. For installation in cavity walls using leaf springs. Delivery includes plaster housing (W 70 x H 70 x D 50 mm) and plaster sheet (100 x 100 mm). Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Wall-mounted, Material: Aluminium / Steel / Glass, Degree of protection: according to DIN EN 60529 IP54, Protection class: (EN 61140) III, Current: 700 mA, Power: 2W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 160lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 68°, With control gear: No, Control: Dimming depending on driver.

| Article data | |
|--------------------|-------------------------------|
| Artikel-Nr. | 10058173 |
| GTIN | 4250047781479 |
| Kurzbeschreibung | LED wall recessed light, IP54 |
| Material | Aluminium / Steel / Glass |
| Colour | White |
| Shape | square |
| Built-in diameter | 68 mm |
| Installation depth | 50 mm |
| Width | 80 mm |
| Aufbauhöhe | 80 mm |
| weight | 0.325 kg |

LED wall recessed light, IP54

Artikel-Nr. 10058173



Licht.
Für Generationen.

| Lighting technology | |
|---------------------|-----------|
| Colour temperature | 3000 K |
| Light colour | White |
| Luminous flux | 160 lm |
| System efficiency | 80 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | Without |
| Beam angle | 68 ° |
| Light sharing | Symmetric |

| Operating technology of the luminaires | |
|--|-----------------------------|
| System output | 2 W |
| Voltage type | DC |
| Current | 700 mA |
| Lamp | LED |
| Lamp holder | Plug&Play |
| Protection class | III |
| Degree of protection | IP54 |
| Converter - possible luminaire 1 pc. | 17723 17748 |
| Control | Dimming depending on driver |
| Leuchtmittelwechsel möglich | ja |

| Mounting technology | |
|-----------------------|-------------------|
| Mounting method | Recessed mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Material cover | Glass transparent |

| Packing data | |
|---------------------|----------|
| Gross weight | 0.371 kg |
| Length of packaging | 110 mm |
| Packaging width | 110 mm |
| Packaging height | 80 mm |

| Accessories | |
|---|---|
|  | <p>Artikel-Nr.: 17723020 Kurzbeschreibung: LED converter 700 mA, on/off Leistung: 1,4 - 31 W Abmessung: 146.5 mm x 43.5 mm x 30 mm</p> |
|  | <p>Artikel-Nr.: 17748020 Kurzbeschreibung: LED converter 700 mA, trailing-edge phase dimmable Leistung: 1,4 - 32 W Abmessung: 166 mm x 46 mm x 34 mm</p> |