### **Motion detector**

## IS 140-2

EAN 4007841 608910 Article number 608910









1000 W















3 years

manufacture's warranty steinel.de/garantie3y

### **Function description**

The classic detector, now with even more class. Infrared motion detector IS 140-2, for indoors and out, ideal for targeted detection close to the building, 140° angle of coverage, reach up to 14 m, selectable time and twilight threshold, sensor turns through 180° and tilts through 90° for exact adjustment of the detection zone.

### **Motion detector**

# IS 140-2

white EAN 4007841 608910 Article number 608910



## **Technical specifications**

Туре	Motion detectors
Dimensions (L x W x H)	99 x 86 x 82 mm
Mains power supply	230 – 240 V / 50 Hz
Sensor Technology	passive infrared
Application, place	Outdoors, Indoors
Installation site	wall
Installation	Surface wiring
Mounting height	1,80 – 3,00 m
Reach, radial	r = 3 m (11 m <sup>2</sup> )
Reach, tangential	r = 14 m (239 m²)
Detection angle	140 °
Angle of aperture	40 °
Switching zones	144 switching zones
Optimum mounting height	2 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Twilight setting TEACH	No
Twilight setting	2 – 2000 lx
Time setting	8 s - 35 Min.
Output	1000 W
Switching output 1, resistive	1000 W
Switching output 1, number of LEDs fluorescent lamps	<sup>/</sup> 6 pcs.

Fluorescent lamps, electronic ballast	430 W
Fluorescent lamps, uncorrected	500 VA
Fluorescent lamps, series-corrected	500 VA
Fluorescent lamps, parallel-corrected	500 VA
Switching output 1, low-voltage halogen lamps	1000 VA
LED lamps	16 W
LED lamps > 2 W	64 W
LED lamps > 8 W	64 W
Capacitive load in µF	88 μF
Constant-lighting control	No
Basic light level function	No
Settings via	Potentiometers
With remote control	No
Interconnection	Yes
	162
Type of interconnection	Master/master
Type of interconnection	Master/master
Type of interconnection  IP-rating	Master/master IP54
Type of interconnection IP-rating Material	Master/master IP54 Plastic
Type of interconnection  IP-rating  Material  Ambient temperature	Master/master IP54 Plastic -20 - 50 °C outdoors, front door, all round the building, terrace / balcony, courtyard
Type of interconnection  IP-rating  Material  Ambient temperature  Application, room	Master/master IP54 Plastic -20 - 50 °C outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Type of interconnection IP-rating Material Ambient temperature Application, room Colour	Master/master IP54 Plastic -20 - 50 °C outdoors, front door, all round the building, terrace / balcony, courtyard & driveway white
Type of interconnection IP-rating Material Ambient temperature Application, room Colour Colour, RAL	Master/master IP54 Plastic -20 - 50 °C outdoors, front door, all round the building, terrace / balcony, courtyard & driveway white 9010
Type of interconnection  IP-rating  Material  Ambient temperature  Application, room  Colour  Colour, RAL  Manufacturer's Warranty	Master/master IP54 Plastic -20 - 50 °C outdoors, front door, all round the building, terrace / balcony, courtyard & driveway white 9010 3 years

## Accessories

EAN 4007841 631765	Corner wall mount 07
EAN 4007841 631864	Corner wall mount 07


### **Motion detector**

## IS 140-2

white EAN 4007841 608910 Article number 608910




#### **Detection Zone**




Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial Schwarz: tangential


### **Dimension Drawing**

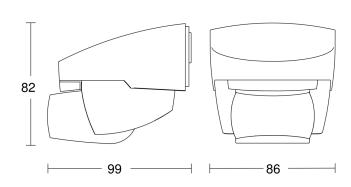


## Light without neutral conductor



### Light with neutral conductor



# Connection using two-circuit switch for manual and automatic operation



# Connection via a two-way switch for manual override and automatic operation

