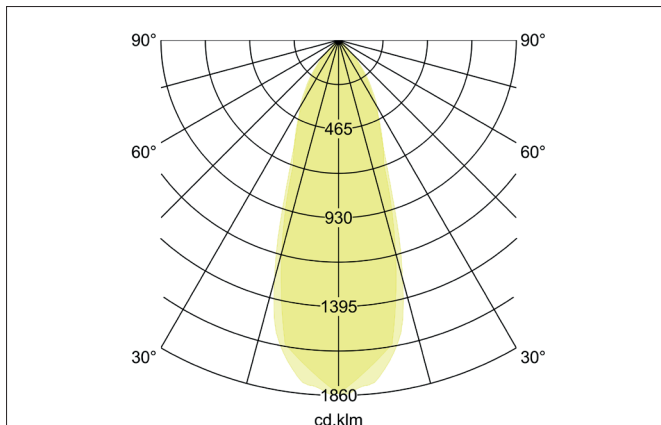
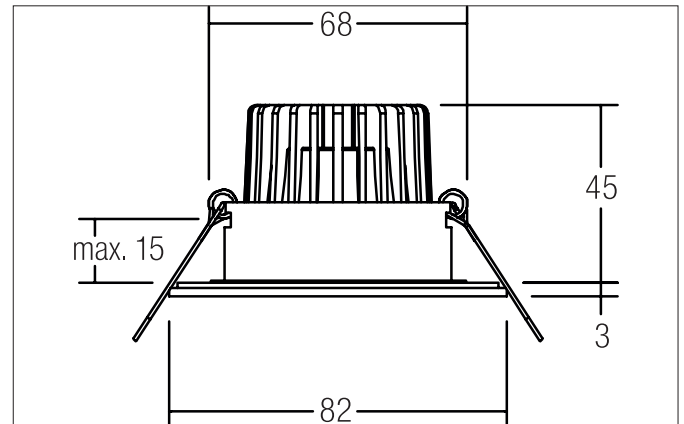


BB15 LED recessed spot set BB15, V4A, IP54, DALI dimmable incl.**connection box**

Artikel-Nr. 41475073

Licht.
Für Generationen.**Tender**

LED recessed spot set BB15, V4A, IP54, DALI dimmable incl. connection box, white, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, DALI-2 dimmable, dimensions of converter: L 130 x W 42 x H 22 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Stainless steel / Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: DALI-2 .

Article data	
Artikel-Nr.	41475073
GTIN	4251433935926
Series name	BB15
Kurzbeschreibung	LED recessed spot set BB15, V4A, IP54, DALI dimmable incl. connection box
Material	Stainless steel / Aluminium / Glass
Colour	White
Shape	round
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	45 mm
scope of delivery	inkl. Anschlussbox, 5-polig
weight	0.413 kg

BB15 LED recessed spot set BB15, V4A, IP54, DALI dimmable incl.**connection box**

Artikel-Nr. 4 1475073

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	680 lm
System efficiency	113 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP54
Schutzart deckenseitig	IP20
Control	DALI-2
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Protection class	II
Degree of protection	IP54
Control	DALI-2

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	V4A No cover with thermal insulation material

Packing data	
Gross weight	0.485 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging height	120 mm