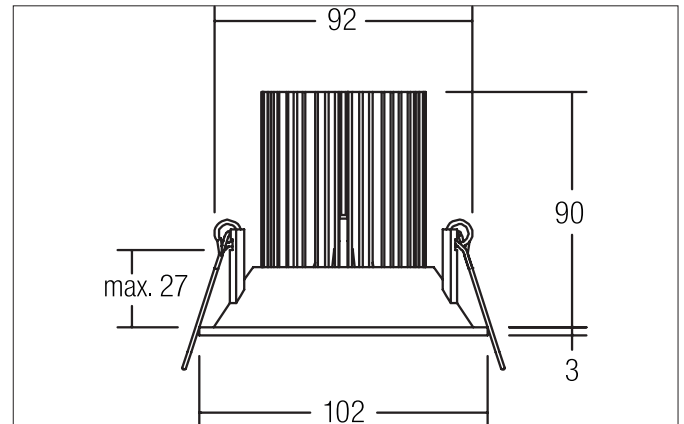


CIRCLE LED recessed downlight CIRCLE, with all-round light gap

Artikel-Nr. 12407073

Licht.
Für Generationen.**Tender**

LED recessed downlight CIRCLE, with all-round light gap, white, round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 700 mA, Power: 13.6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 950lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 45°, Adjustability: Not adjustable, With control gear: No.

Article data	
Artikel-Nr.	12407073
GTIN	4250047781271
Series name	CIRCLE
Kurzbeschreibung	LED recessed downlight CIRCLE, with all-round light gap
Material	Aluminium
Colour	White
Type of surface	Matt
Shape	round
Outer diameter	102 mm
Built-in diameter	92 mm
Installation depth	90 mm
weight	0.402 kg

CIRCLE LED recessed downlight CIRCLE, with all-round light gap

Artikel-Nr. 12407073

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	950 lm
System efficiency	70 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	45 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	13.6 W
Voltage type	DC
Current	700 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17613 17621 17664 17643 17657 17683 17648 17671 17672
Control	Dimming depending on driver
Leuchtmittelwechsel möglich	ja
Rated life time L70/B50 at 25 °C	50000 h

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material

Packing data	
Gross weight	0.477 kg
Length of packaging	145 mm
Packaging width	145 mm
Packaging height	140 mm

CIRCLE LED recessed downlight CIRCLE, with all-round light gap

Artikel-Nr. 12407073

Licht.
Für Generationen.

Accessories	
	Artikel-Nr.: 17613000 Kurzbeschreibung: LED converter 350 mA, on/off Leistung: 1 - 15 W Abmessung: 115 mm x 34 mm x 19 mm
	Artikel-Nr.: 17621020 Kurzbeschreibung: LED converter 350 mA, on/off Leistung: 1 - 21 W Abmessung: 128 mm x 50 mm x 13 mm
	Artikel-Nr.: 17664020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 10,2 - 14 W Abmessung: 125 mm x 51 mm x 20 mm
	Artikel-Nr.: 17643020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 8,8 - 18 W Abmessung: 110 mm x 52 mm x 22 mm
	Artikel-Nr.: 17657000 Kurzbeschreibung: LED converter 350 mA, 1-10 V dimmable (analog) Leistung: 5,2 - 18 W Abmessung: 110.5 mm x 52 mm x 22 mm
	Artikel-Nr.: 17683020 Kurzbeschreibung: LED converter 350 mA, DALI dimmable (digital) Leistung: 3,5 - 17 W Abmessung: 110.5 mm x 52 mm x 22 mm
	Artikel-Nr.: 17648020 Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable Leistung: 0,7 - 17 W Abmessung: 166 mm x 46 mm x 34 mm
	Artikel-Nr.: 17671020 Kurzbeschreibung: LED converter 350mA, ZigBee dimmable Leistung: 3,5 - 18,5 W Abmessung: 146.5 mm x 44 mm x 30 mm
	Artikel-Nr.: 17672020 Kurzbeschreibung: LED converter 350mA, Casambi dimmable Leistung: 3,5 - 18 W Abmessung: 146.5 mm x 44 mm x 30 mm