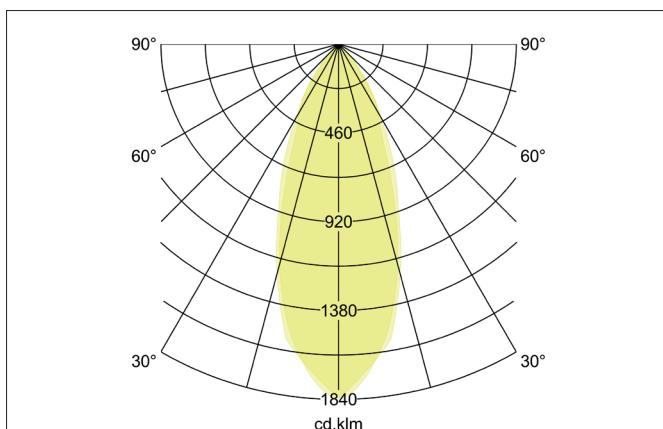
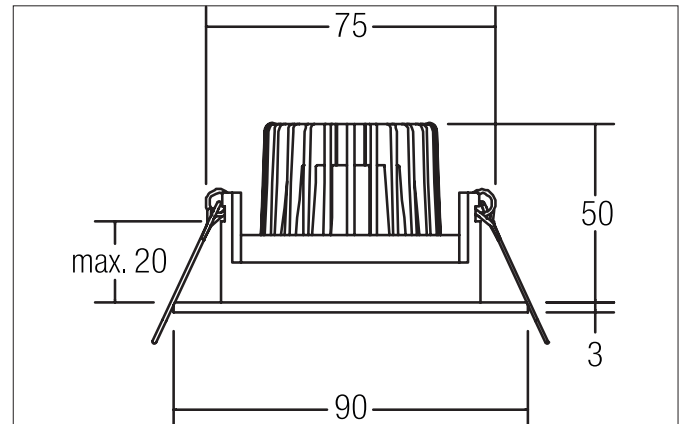


**LED recessed downlight, IP65**

Artikel-Nr. 13368153

Licht.  
Für Generationen.**Tender**

LED recessed downlight, IP65, nickel, round. In a compact design, for installation in tool-less rapid assembly systems Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP65\*, Protection class: (EN 61140) III, Current: 350 mA, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.

| Article data       |                              |
|--------------------|------------------------------|
| Artikel-Nr.        | 13368153                     |
| GTIN               | 4251433910435                |
| Kurzbeschreibung   | LED recessed downlight, IP65 |
| Material           | Aluminium / Glass            |
| Colour             | Nickel                       |
| Type of surface    | Matt                         |
| Shape              | round                        |
| Outer diameter     | 90 mm                        |
| Built-in diameter  | 75 mm                        |
| Installation depth | 50 mm                        |
| weight             | 0.166 kg                     |

**LED recessed downlight, IP65**

Artikel-Nr. 13368153

Licht.  
Für Generationen.

| Lighting technology |            |
|---------------------|------------|
| Colour temperature  | 3000 K     |
| Light colour        | White      |
| Light output        | Direct     |
| Luminous flux       | 680 lm     |
| System efficiency   | 113 lm/W   |
| Colour rendering    | CRI > 80   |
| Reflector           | High-gloss |
| Beam angle          | 38 °       |
| Light sharing       | Symmetric  |

| Operating technology of the luminaires |                                                                   |
|----------------------------------------|-------------------------------------------------------------------|
| System output                          | 6 W                                                               |
| Voltage type                           | DC                                                                |
| Current                                | 350 mA                                                            |
| Lamp                                   | LED                                                               |
| Lamp holder                            | Plug&Play                                                         |
| Protection class                       | III                                                               |
| Degree of protection                   | IP65                                                              |
| Schutzart deckenseitig                 | IP20                                                              |
| Converter - possible luminaire 1 pc.   | 17662 17613 17621 17663 17652 17640 17657 17683 17648 17671 17672 |
| Control                                | Dimming depending on driver                                       |
| Leuchtmittelwechsel möglich            | ja                                                                |

| Mounting technology   |                                           |
|-----------------------|-------------------------------------------|
| Mounting method       | Recessed mounting                         |
| Place of installation | Ceiling-mounted                           |
| Adjustability         | Not adjustable                            |
| Further references    | No cover with thermal insulation material |
| Material cover        | Glass transparent                         |
| Circlip               | Without circlip                           |

| Packing data        |         |
|---------------------|---------|
| Gross weight        | 0.22 kg |
| Length of packaging | 100 mm  |
| Packaging width     | 100 mm  |
| Packaging height    | 100 mm  |

**LED recessed downlight, IP65**

Artikel-Nr. 13368153

Licht.  
Für Generationen.

| Accessories                                                                         |                                                                                                                                                            |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Artikel-Nr.: 17662020<br>Kurzbeschreibung: LED converter 350 mA, on/off<br>Leistung: 1 - 7,2 W<br>Abmessung: 68 mm x 35 mm x 21 mm                         |
|    | Artikel-Nr.: 17613000<br>Kurzbeschreibung: LED converter 350 mA, on/off<br>Leistung: 1 - 15 W<br>Abmessung: 115 mm x 34 mm x 19 mm                         |
|    | Artikel-Nr.: 17621020<br>Kurzbeschreibung: LED converter 350 mA, on/off<br>Leistung: 1 - 21 W<br>Abmessung: 128 mm x 50 mm x 13 mm                         |
|    | Artikel-Nr.: 17663020<br>Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable<br>Leistung: 2,8 - 7 W<br>Abmessung: 110 mm x 50 mm x 19 mm  |
|   | Artikel-Nr.: 17652020<br>Kurzbeschreibung: LED-round converter 350 mA, phase dimmable<br>Leistung: 4,9 - 7 W<br>Abmessung: 24 mm                           |
|  | Artikel-Nr.: 17640020<br>Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable<br>Leistung: 4,2 - 10 W<br>Abmessung: 102 mm x 38 mm x 21 mm |
|  | Artikel-Nr.: 17657000<br>Kurzbeschreibung: LED converter 350 mA, 1-10 V dimmable (analog)<br>Leistung: 5,2 - 18 W<br>Abmessung: 110.5 mm x 52 mm x 22 mm   |
|  | Artikel-Nr.: 17683020<br>Kurzbeschreibung: LED converter 350 mA, DALI dimmable (digital)<br>Leistung: 3,5 - 17 W<br>Abmessung: 110.5 mm x 52 mm x 22 mm    |
|  | Artikel-Nr.: 17648020<br>Kurzbeschreibung: LED converter 350 mA, trailing-edge phase dimmable<br>Leistung: 0,7 - 17 W<br>Abmessung: 166 mm x 46 mm x 34 mm |
|  | Artikel-Nr.: 17671020<br>Kurzbeschreibung: LED converter 350mA, ZigBee dimmable<br>Leistung: 3,5 - 18,5 W<br>Abmessung: 146.5 mm x 44 mm x 30 mm           |
|  | Artikel-Nr.: 17672020<br>Kurzbeschreibung: LED converter 350mA, Casambi dimmable<br>Leistung: 3,5 - 18 W<br>Abmessung: 146.5 mm x 44 mm x 30 mm            |