


LED wall recessed light  
Artikel-Nr. 10140203

Licht.  
Für Generationen.

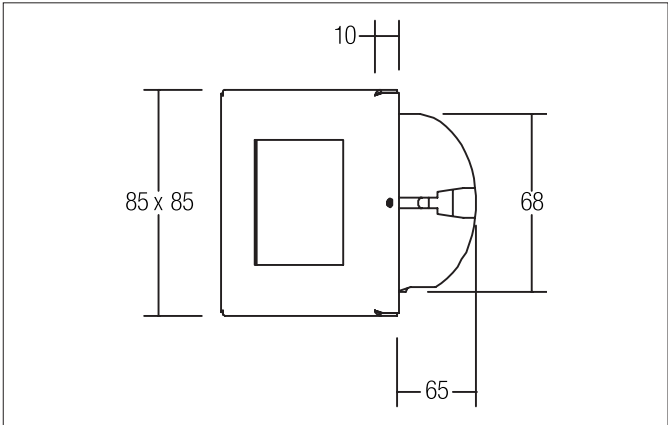

**Tender**  
LED wall recessed light, stainless steel, square. Recessed mounting, Wall-mounted. Including a converter for connection with the 230-V mains voltage, on/off switchable, and cavity wall mounting box Ø 68 mm / installation depth: 65 mm. Mounting method: Recessed mounting, Place of installation: Wall-mounted, Material: Stainless steel / Acrylic / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 1.2W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 40lm, Colour temperature: 3.000 K, With control gear: Yes, Control: on/off.

| Article data       |                         |
|--------------------|-------------------------|
| Artikel-Nr.        | 10140203                |
| GTIN               | 4250047767657           |
| Kurzbeschreibung   | LED wall recessed light |
| Material           | Stainless steel         |
| Colour             | Stainless steel         |
| Shape              | square                  |
| Built-in diameter  | 68 mm                   |
| Installation depth | 65 mm                   |
| Width              | 85 mm                   |
| Aufbauhöhe         | 85 mm                   |
| weight             | 0.237 kg                |

**LED wall recessed light**

Artikel-Nr. 10140203

Licht.  
Für Generationen.

| Lighting technology |           |
|---------------------|-----------|
| Colour temperature  | 3000 K    |
| Light colour        | White     |
| Luminous flux       | 40 lm     |
| System efficiency   | 33 lm/W   |
| Colour rendering    | CRI > 80  |
| Reflector           | Without   |
| Light sharing       | Symmetric |

| Operating technology of the luminaires |        |
|----------------------------------------|--------|
| System output                          | 1.2 W  |
| Voltage type                           | AC     |
| AC nominal voltage max                 | 230 V  |
| Frequenz max.                          | 50 Hz  |
| Lamp                                   | LED    |
| Protection class                       | I      |
| Degree of protection                   | IP20   |
| Control                                | on/off |
| Leuchtmittelwechsel möglich            | ja     |

| Operating technology of driver |        |
|--------------------------------|--------|
| Control                        | on/off |

| Mounting technology   |                   |
|-----------------------|-------------------|
| Mounting method       | Recessed mounting |
| Place of installation | Wall-mounted      |
| Adjustability         | Not adjustable    |
| Material cover        | Plastic, opal     |

| Packing data        |          |
|---------------------|----------|
| Gross weight        | 0.268 kg |
| Length of packaging | 95 mm    |
| Packaging width     | 75 mm    |
| Packaging height    | 95 mm    |