

PRODUCT DATASHEET

SF BLKH 250 10W/3000K WT IP65

SURFACE BULKHEAD 250 ON/OFF | Robust wall and ceiling luminaire with IP65 protection



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Corridors, stairways, entrance areas
- Passages, underpasses
- Public areas

Product benefits

- Suitable for use in dusty and damp locations thanks to high IP rating
- Suitable for use in public areas thanks to high IK rating
- Multiple mounting patterns for convenient installation
- Separate covers available for an aesthetic and functional product design
- 5 years guarantee
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)

Product features

- UV-stabilized polycarbonate (PC) housing, PC-diffuser
- Impact resistance: IK10
- Push wire terminal for tool-free connection
- Through wiring possible
- Type of protection: IP65
- Luminous flux: up to 800 lm
- High luminous efficacy: up to 80 lm/W



- Lifetime (L70/B50): up to 50,000 h (at 25 °C)
- Ambient temperature in operation: -20...+40 °C

TECHNICAL DATA

Electrical data

| | |
|--|-----------------------|
| Nominal wattage | 8.20 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Nominal current | 350 mA |
| Inrush current | 4.52 A |
| Inrush current time T_{h50} | 50 μ s |
| Max. no. of lum. on circuit break. B16 A | 94 |
| Max. no. of lum. on circuit break. C10 A | 75 |
| Max. no. of lum. on circuit break. C16 A | 120 |
| Power factor λ | ≥ 0.5 |
| Total harmonic distortion | < 10 % |
| Protection class | II |
| Operating mode | Integrated LED driver |


Photometrical data

| | |
|--|----------------------|
| Luminous flux | 800 lm |
| Luminous efficacy | 80 lm/W |
| Color temperature | 3000 K |
| Light color (designation) | Warm White |
| Color rendering index Ra | > 80 |
| Standard deviation of color matching | < 5 sdc _m |
| Low flicker | Yes |
| Flickering metric (Pst LM) | - |
| Stroboscope effect metric (SVM) | - |
| Photobiological safety group acc. to EN62778 | RG0 |
| Beam angle | 120 ° |






LDC typ cone

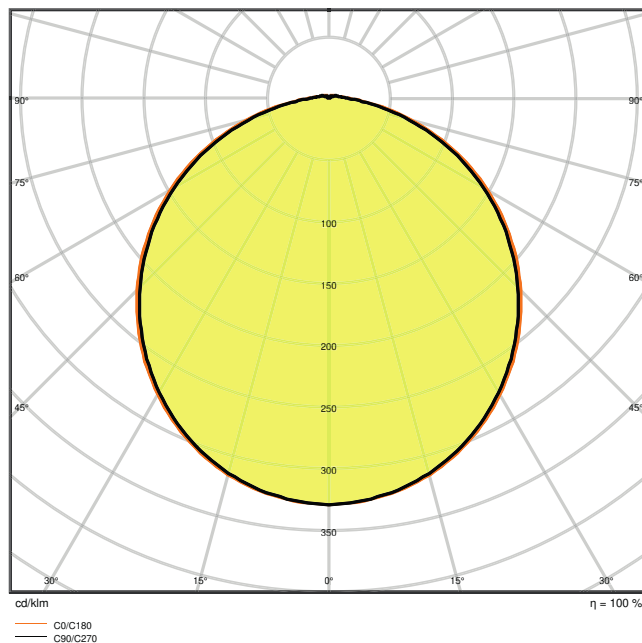

LDC typ polar

Dimensions & Weight

| | |
|----------------|-----------|
| Diameter | 250.00 mm |
| Height | 70.00 mm |
| Product weight | 520.00 g |



Materials & Colors

| | |
|---------------|-------|
| Product color | White |
| Housing color | White |



| | |
|--|--------------------|
| Body material | Polycarbonate (PC) |
| Cover material | Polycarbonate (PC) |
| Light emitting surface material | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 850 °C |
| Mercury content | 0.0 mg |

Application & Mounting

| | |
|--|--------------------|
| Ambient temperature range | -20...+40 °C |
| Type of connection | Screwless terminal |
| Type of protection | IP65 |
| Protection class IK (shock resistance) | IK10 |
| Dimmable | No |
| Mounting type | Surface |
| Mounting location | Ceiling / Wall |
| Application environment | Indoor |
| LED module replaceable | Not replaceable |
| With light source | Yes |

Lifespan

| | |
|----------------------------|---------|
| Lifespan L70/B50 at 25 °C | 50000 h |
| Lifespan L80/B10 at 25 °C | 35000 h |
| Lifespan L90/B10 at 25 °C | 20000 h |
| Number of switching cycles | 100000 |

Certificates & Standards

| | |
|--|---------|
| Standards | CE / CB |
| Luminaire with limited surface temperature, "D sign" | No |
| Ball shot safe | No |

EQUIPMENT / ACCESSORIES

- Additional cover rings in different designs available
- Mounting screws and dowels included

DOWNLOAD DATA



DOWNLOAD DATA



User instruction



Tender documents



Declarations of conformity



IES file (IES)



LDT file (Eulumdat)



R3D file (Relux 3D Model)



M3D file (3D Model)




UGR file (UGR table)

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075374850 | Shipping box 8 | 550 mm x 285 mm x 315 mm | 5398.00 g | 49.38 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

- For Guarantee see www.ledvance.com/guarantee



DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

