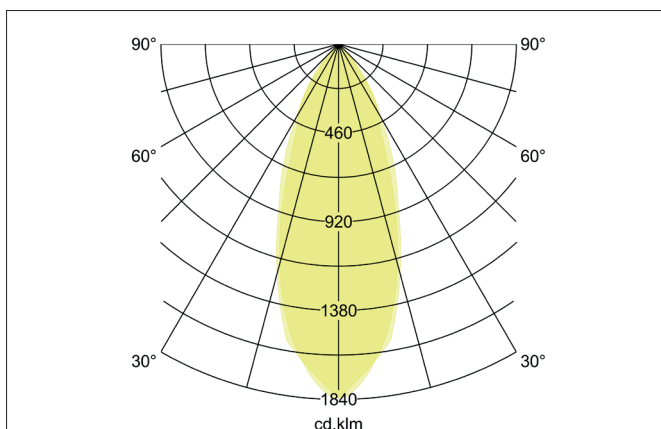
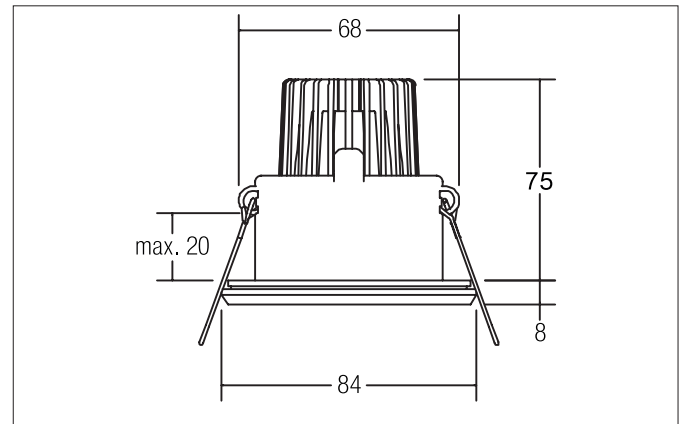


LED recessed downlight set, V4A, IP65, on/off
 Artikel-Nr. 38306423

 Licht.
 Für Generationen.

Tender

LED recessed downlight set, V4A, IP65, on/off, stainless steel, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material:, Degree of protection: according to DIN EN 60529 IP65*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 540lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Article data	
Artikel-Nr.	38306423
GTIN	4251433910626
Kurzbeschreibung	LED recessed downlight set, V4A, IP65, on/off
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Type of surface	Matt
Shape	round
Outer diameter	84 mm
Built-in diameter	68 mm
Installation depth	75 mm
weight	0.187 kg

LED recessed downlight set, V4A, IP65, on/off

Artikel-Nr. 38306423

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	540 lm
System efficiency	90 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP65
Schutzart deckenseitig	IP20
Control	on/off
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
Control	on/off

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	V4A No cover with thermal insulation material
Material cover	Glass structured
Circlip	Without circlip

Packing data	
Gross weight	0.243 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging height	120 mm