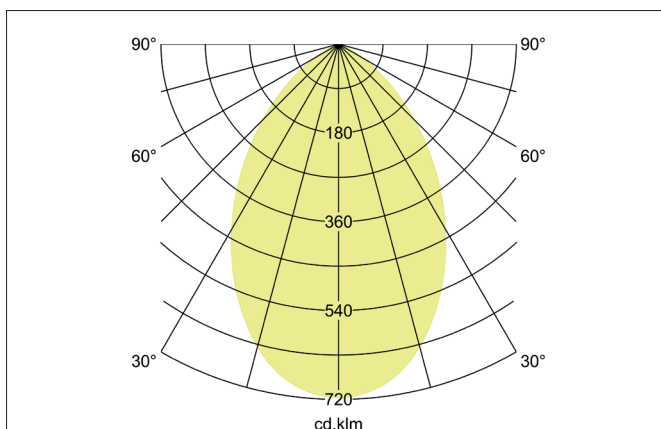
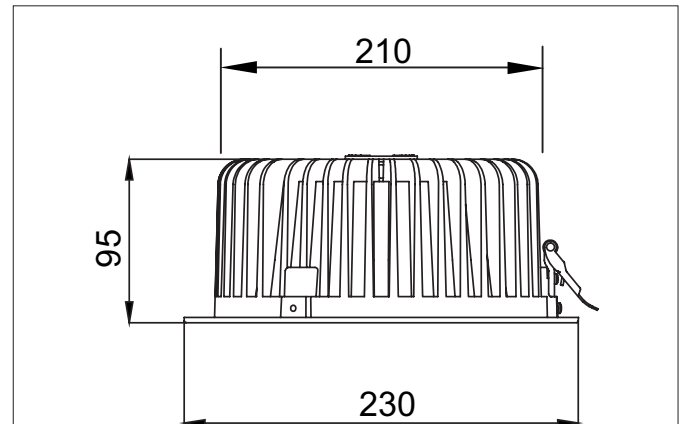


LED-Einbaudownlight, DALI dimmbar

Artikel-Nr. 12553179

Licht.
Für Generationen.**Tender**

LED recessed downlight, white, round. In a compact design, for installation in tool-less rapid assembly systems Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic / Steel, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 32.5W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 2.720lm, Light colour : White, Beam angle: 70°, Adjustability: Not adjustable, With control gear: Yes.

Article data	
Artikel-Nr.	12553179
GTIN	4251433945253
Kurzbeschreibung	LED-Einbaudownlight, DALI dimmbar
Material	Aluminium / Plastic / Steel
Colour	White
Type of surface	Structure
Shape	round
Outer diameter	230 mm
Built-in diameter	210 mm
Installation depth	95 mm
scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung
weight	1.633 kg

LED-Einbaudownlight, DALI dimmbar

Artikel-Nr. 12553179

Licht.
Für Generationen.

Lighting technology	
Light colour	White
Light output	Direct
Luminous flux	2,720 lm
System efficiency	84 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Reflektorfarbe	silver
Beam angle	70 °
Glare evaluation	UGR < 22
Light sharing	Symmetric

Operating technology of the luminaires	
System output	32.5 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Control	DALI
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Plastic, opal

Packing data	
Gross weight	1.835 kg
Length of packaging	255 mm
Packaging width	235 mm
Packaging height	180 mm