


# RS PRO P2 S

warm white

EAN 4007841 056100

Article number 056100

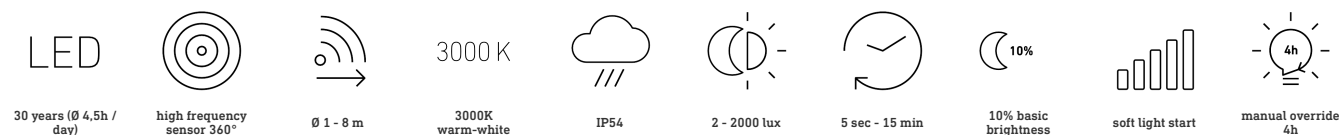

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect switched indoor light . The RS PRO P2 S integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and unbeatable efficiency. As many as ten lights can be interconnected by cable. Output: 15,1 W with 1674 lm, 3000 K.

## Technical specifications

Dimensions (Ø x H)	320 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	15,1 W
Interconnection	Yes
Lichtstrom Gesamtprodukt	1674 lm
Gesamtprodukt Effizienz	111 lm/W
Colour temperature	3000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °

Electronic scalability	Yes
Mechanical scalability	No
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	warm white
PU1, EAN	4007841056100

# RS PRO P2 S


warm white

EAN 4007841 056100

Article number 056100




## Detection Zone

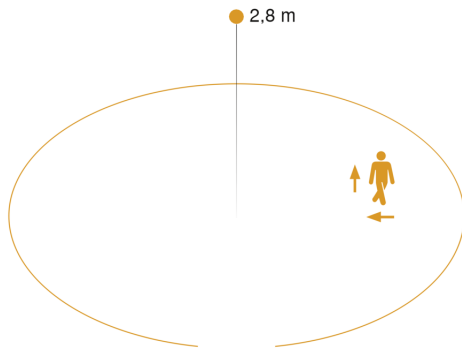


Mögliche Montagehöhe: 2,00 m – 4,00 m  
Orange: radial und tangential

## Dimension Drawing

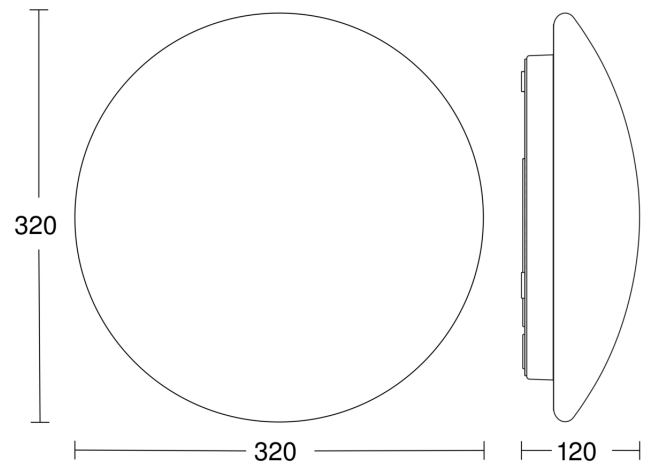


## Light Distribution Curve



<b>Output</b>	15,1 W
<b>With lamp</b>	Yes, STEINEL LED system
<b>Lamp</b>	LED cannot be replaced
<b>Luminous flux</b>	1674 lm
<b>Colour temperature</b>	3000 K
<b>Colour Rendering Index</b>	80-89
<b>LED life expectancy (max. °C)</b>	50000 h
<b>LED cooling system</b>	Passive Thermo Control

## Slave/wireless master interconnection circuit diagram



Sensor-switched LED indoor light - Professional Line

# RS PRO P2 S

warm white

EAN 4007841 056100

Article number 056100



## Master/master interconnection circuit diagram

