

## Description




- Passive infrared presence detector for ceiling mounting
- Square detection area for corridors and storage areas
- Detection area with 2 individually connectable and disconnectable detection zones, each 15 x 5 m (total 30 x 5 m)
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendaPro (optional)

## Technical data

Operating voltage	110 – 230 V AC
Frequency	50 – 60 Hz
Installation height	2 – 6 m
Minimum height	> 1,7 m
Installation type	Ceiling installation
Colour	White
Power consumption	ca. 0,1 W
Light measurement	Mixed light measurement
Type of connection	Screw terminals
Max. cable cross section	max. 2 x 2,5 mm <sup>2</sup>
Size of concealed housing	Ø 55 mm (NIS, PMI)
Detection range	150 m <sup>2</sup> (30,0 x 5 m)
Ambient temperature	-15 °C ... +50 °C
Type of protection	IP 54 (when fitted)


## Connection example

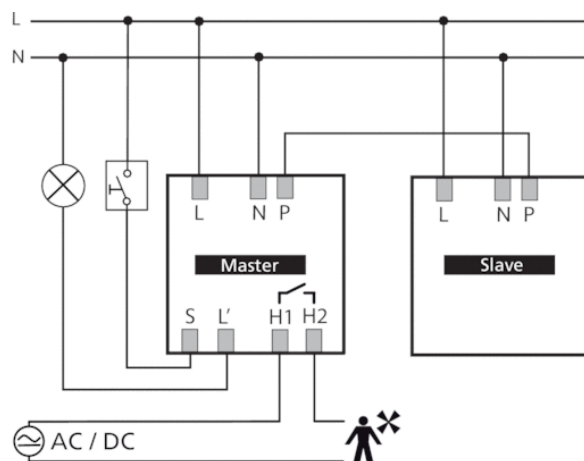


Article number: 2010330

### Detection range

Mounting height (A)	Head on to (r)	Diagonally (t)
2 m	56 m <sup>2</sup>   16 m x 3,5 m	56 m <sup>2</sup>   16 m x 3,5 m
2,5 m	72 m <sup>2</sup>   18 m x 4 m	88 m <sup>2</sup>   22 m x 4 m
3 m	90 m <sup>2</sup>   20 m x 4,5 m	135 m <sup>2</sup>   30 m x 4,5 m
3,5 m	100 m <sup>2</sup>   20 m x 5 m	150 m <sup>2</sup>   30 m x 5 m
4 m	100 m <sup>2</sup>   20 m x 5 m	150 m <sup>2</sup>   30 m x 5 m
4,5 m	100 m <sup>2</sup>   20 m x 5 m	150 m <sup>2</sup>   30 m x 5 m
5 m	100 m <sup>2</sup>   20 m x 5 m	150 m <sup>2</sup>   30 m x 5 m
5,5 m	100 m <sup>2</sup>   20 m x 5 m	150 m <sup>2</sup>   30 m x 5 m
6 m	100 m <sup>2</sup>   20 m x 5 m	150 m <sup>2</sup>   30 m x 5 m

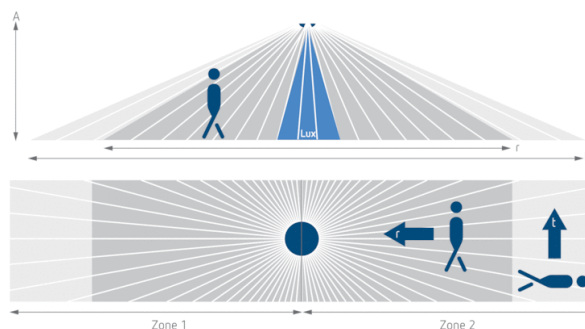

### Scale drawings

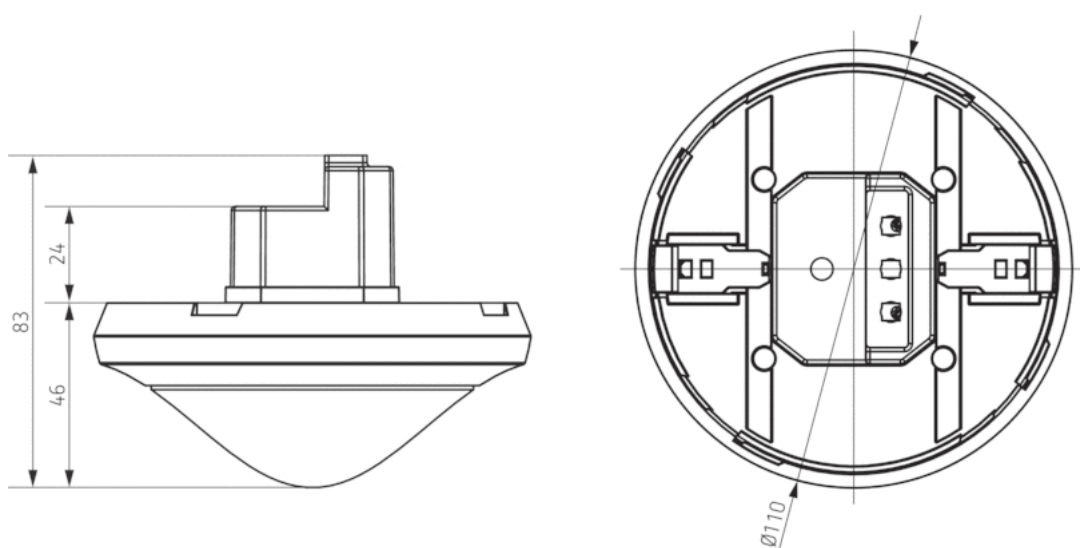

### Accessories

#### Surface frame 110A WH

- Article number: 9070912  
[Details ▶ www.theben.de](http://www.theben.de)



#### SendoPro 868-A

- Article number: 9070675  
[Details ▶ www.theben.de](http://www.theben.de)



#### theSenda P

- Article number: 9070910  
[Details ▶ www.theben.de](http://www.theben.de)



#### theSenda B

- Article number: 9070985  
[Details ▶ www.theben.de](http://www.theben.de)



#### theSenda S

- Article number: 9070911  
[Details ▶ www.theben.de](http://www.theben.de)



#### Ceiling installation box 73A

- Article number: 9070917  
[Details ▶ www.theben.de](http://www.theben.de)



Article number: 2010330

### Masking clip

- Article number: 9070921  
Details ▶ [www.theben.de](http://www.theben.de)



### QuickSafe

- Article number: 9070531  
Details ▶ [www.theben.de](http://www.theben.de)



### Product selection

Installation type	Channel	Operating voltage	Colour	Type	Article number
Ceiling installation		110 – 230 V AC	White	thePassa P360 Slave UP WH	2010330
Ceiling installation		110 – 230 V AC	Grey	thePassa P360 Slave UP GR	2010331