

PRODUCT DATASHEET

DL IP44 DN 190 18W 865 WT

DOWNLIGHT IP44 | Downlights with IP44 grade



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- General illumination
- Public areas
- Stairways
- Corridors
- Shops
- Bathrooms

Product benefits

- High luminous efficacy
- Very homogenous light
- Simple installation thanks to integrated driver

Product features

- Type of protection: IP44
- Luminous efficacy: 100 lm/W




TECHNICAL DATA

Electrical data


Nominal wattage	18.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	140.000 mA
Inrush current	6.7 A
Inrush current time T_{h50}	250 μ s
Max. number of luminaires per miniature circuit breaker B16	80
Max. number of luminaires per miniature circuit breaker C10	42
Max. number of luminaires per miniature circuit breaker C16	68
Power factor λ	0.50
Total harmonic distortion	< 90 %
Protection class	II
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	1800 lm
Luminous efficacy	100 lm/W
Color temperature	6500 K
Light color (designation)	Cool Daylight
Color rendering index Ra	> 80
Standard deviation of color matching	< 6 sdcm
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	100 °

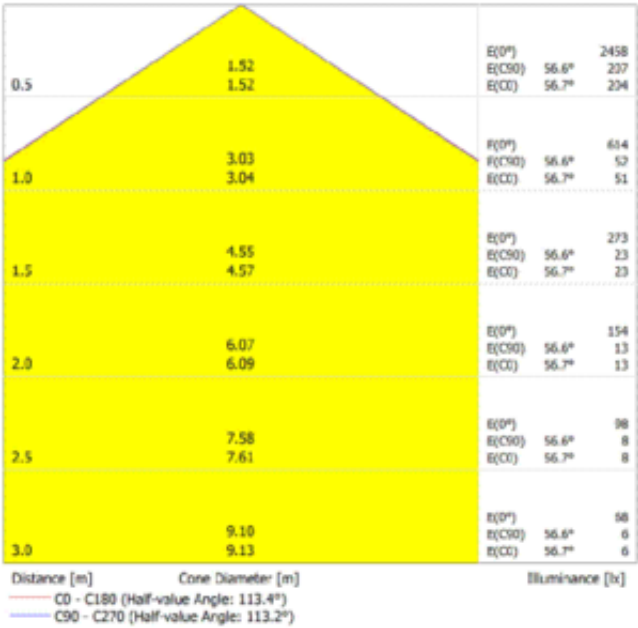



DL IP44 DN 190 18W

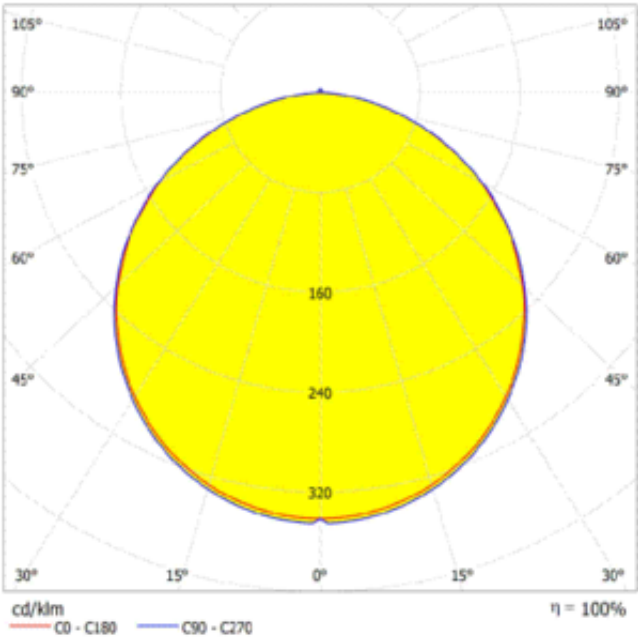

DL IP44 DN 190 18W

Dimensions & Weight

Diameter	190.00 mm
Height	42.00 mm
Product weight	197.00 g



DL IP44 DN 190 18W

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Cable, 2-pole
Type of protection	IP44
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	175 mm
Mounting depth	40 mm
Mechanically adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	20000 h ¹⁾
Lifespan L80/B10 at 25 °C	18000 h ¹⁾
Lifespan L80/B50 at 25 °C	18000 h
Lifespan L90/B10 at 25 °C	15000 h ¹⁾
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	108 mA
ECG - Output ripple current	< 5 %

Certificates & Standards

Standards	CE / EMC / ROHS 2.0 / REACH
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Accessories Optional

Product image	Product name	EAN
	DL IP44 FRAME DN 190 WT	4058075709942

EQUIPMENT / ACCESSORIES

– Surface mounting frames available as accessories

DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	DL IP44 DN 115 8W 830 WT
	User instruction / safety instructions	Safety instructions
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	DL IP44 DN 115 8W 830 WT
	Legal information	DL IP44 DN WT
	Legal information	ECO PANEL
	Declarations of conformity	CE Declaration of Conformity DOWNLIGHT IP44 DN WT
	Declarations of conformity UKCA	UKCA Declaration of Conformity DOWNLIGHT IP44 DN WT
	Photometric and lighting design files	Document name
	IES file (IES)	DL IP44 DN 190 18W 865 WT

Photometric and lighting design files		Document name
	LDT file (Eulumdat)	DL IP44 DN 190 18W 865 WT
	ULD file (DIALux)	DL IP44 DN 190 18W 865 WT
	ROLF file (RELUX)	DL IP44 DN 190 18W 865 WT
	UGR file (UGR table)	DL IP44 DN 190 18W
	Light distribution curve type cone	DL IP44 DN 190 18W
	Light distribution curve type polar	DL IP44 DN 190 18W
CAD/BIM files		Document name
	BIM Revit 3D	DL IP44
	CAD STEP 3D	DL IP44 DN 190
Tender texts		Document name
	Tender documents	DOWNLIGHT IP44 DN 190 18W 865 WT-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075703179	Folding box 1	195 mm x 51 mm x 195 mm	241.00 g	1.94 dm ³
4058075703186	Shipping box 10	400 mm x 269 mm x 211 mm	2801.00 g	22.70 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



Model	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	h [mm]
DL IP44 DN190	Ø 75	Ø 58	Ø 90	3-25	65	40	>50	>70
DL IP44 DN111	Ø 100	Ø 80	Ø 111	3-25	65	40	>50	>70
DL IP44 DN166	Ø 180	Ø 140	Ø 166	3-25	65	40	>50	>70
DL IP44 DN190	Ø 111	Ø 108	Ø 190	3-25	65	40	>50	>70
DL IP44 DN215	Ø 205	Ø 154	Ø 215	9-35	68	40	>60	>70

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.