

Sensor-switched LED floodlight

XLED CAM 1 SC

Anthracite

EAN 4007841 065294

Article number 065294



LED

long life LED
50.000 h

3000 K

3000K
warm-white



infrared sensor
180°



max. 10 m



2,4 GHz WiFi



Camera



Intercom system



inclusive



IP44



60° vertical, 128°
horizontal

Function description

Multi-talent with a focus on security. The XLED CAM1 SC is an outdoor spotlight, motion detector, surveillance camera and intercom all in one. The 180° infrared motion sensor with 10 m range detects every movement. With warm white 3000 K and 2310 lm, the spotlight is amazingly bright with 21 W and economical in consumption. Wireless networking via WLAN and individual settings via free STEINEL CAM App.

XLED CAM 1 SC

Anthracite

EAN 4007841 065294


Article number 065294

Technical specifications

Dimensions (L x W x H)	167 x 210 x 275 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Output	21 W
Interconnection	No
Vernetzung via: Connect Bluetooth Mesh	Wi-Fi
Lichtstrom Gesamtprodukt	2310 lm
Stroboskop-Effekt (SVM)	0,3 SVM
Gesamtprodukt Effizienz	110 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	= 80
With lamp	Yes, LED lamp
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	180 °
Angle of aperture	45 °
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No

Reach, radial	r = 2 m (6 m ²)
Reach, tangential	r = 10 m (157 m ²)
Continuous light	selectable
Photo-cell controller	Yes
Twilight setting	10 – 10000 lx
Time setting	60 s – 15 Min.
Basic light level function	Yes
Basic light level function time	all night
Main light adjustable	30 - 100 %
Functions	intercom system, Camera
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-10 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	3 years
Settings via	Wi-Fi
Installation site	wall
Version	Anthracite
PU1, EAN	4007841065294

Detection Zone

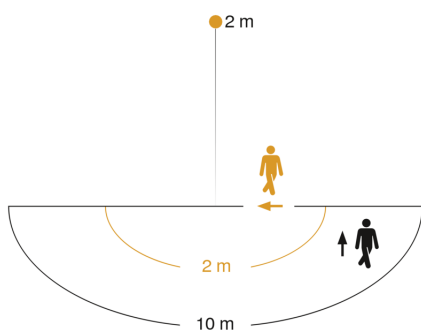


Mögliche Montagehöhe: 1,80 m – 2,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

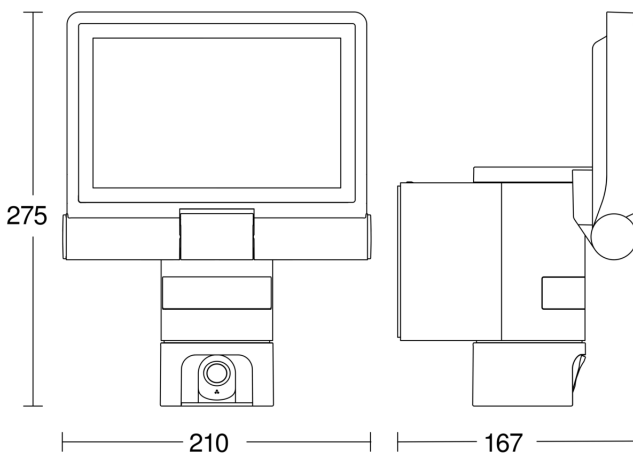

Sensor-switched LED floodlight

XLED CAM 1 SC

Anthracite

EAN 4007841 065294

Article number 065294



Circuit diagram

