

# L 400 S

black

EAN 4007841 611019

Article number 611019



Max. 60 W

infrared sensor  
240°

max. 12 m



IP44



2 - 2000 lux



10 sec - 15 min



energy saving

5 years

manufacturer's  
warranty  
steinel-professional.de/garantie

ENEC 10

## Function description

Simply classic, simply classy. Outdoor SensorLight L 400, ideal for building walls and entrance areas, for E 27 lamps, 240° angle of coverage, max. reach 12 m, basic light-level function, hand-blown crystal glass shade with decorative bubble effect.

## Technical specifications

Dimensions (L x W x H)	250 x 215 x 336 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Output	60 W
Power consumption	0,8 W
Interconnection	No
Slave mode/selectable	No
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	240 °
Angle of aperture	180 °
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (19 m²)
Reach, tangential	r = 12 m (302 m²)
Continuous light	selectable, 4h

Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Glass transparent
Manufacturer's Warranty	5 years
Settings via	Potentiometers
With remote control	No
Installation site	wall
Cover material	shrouds
Version	black
PU1, EAN	4007841611019

# L 400 S

black

EAN 4007841 611019

Article number 611019




## Accessories

EAN 4007841 630317

Corner wall mount 03

## Detection Zone

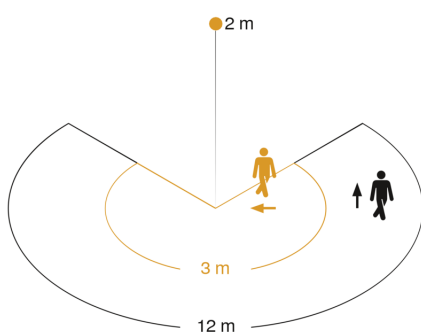


Mögliche Montagehöhe: 1,80 m – 6,00 m


Orange: radial

Schwarz: tangential

## Dimension Drawing

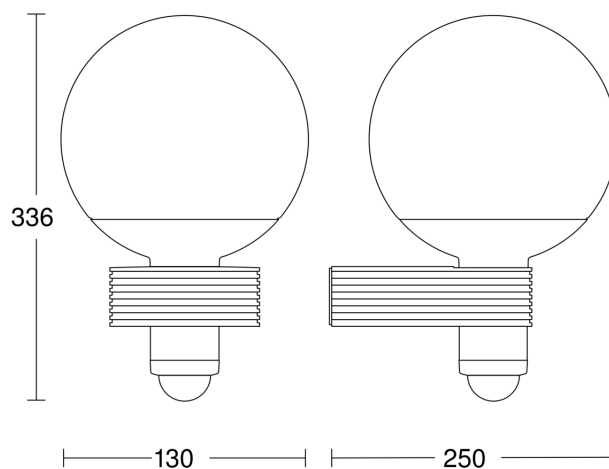

## Light Distribution Curve



Output  
With lamp  
Lamp

60 W  
No  
All-purpose lamp

## Slave/wireless master interconnection circuit diagram

