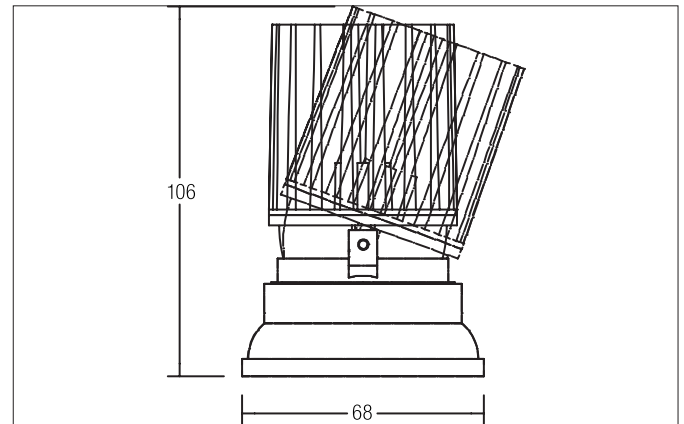


COUPLED LED system recessed spot COUPLED

Artikel-Nr. 12631073

Licht.
Für Generationen.**Tender**

LED system recessed spot COUPLED, white, round. In a compact design, for installation in tool-less rapid assembly systems. Installation is only with plaster or installation frame 82030170 or 82032170 possible. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 500 mA, Power: 8.9W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 950lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 34°, Adjustability: Rotable and pivoted, With control gear: No, Control: Dimming depending on driver.

Article data	
Artikel-Nr.	12631073
GTIN	4251433916093
Series name	COUPLED
Kurzbeschreibung	LED system recessed spot COUPLED
Material	Aluminium / Plastic
Colour	White
Type of surface	Matt
Shape	round
Outer diameter	68 mm
Installation depth	106 mm
weight	0.190 kg

COUPLED LED system recessed spot COUPLED

Artikel-Nr. 12631073

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	950 lm
System efficiency	107 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	34 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	8.9 W
Voltage type	DC
Current	500 mA
Lamp	LED
Protection class	III
Degree of protection	IP20
Converter - possible luminaire 1 pc.	17823 17824 17826 17829
Control	Other
Leuchtmittelwechsel möglich	ja

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	20°
Rotation angle	350°
Further references	No cover with thermal insulation material

Packing data	
Gross weight	0.259 kg
Length of packaging	105 mm
Packaging width	105 mm
Packaging height	130 mm

Accessories	
	Artikel-Nr.: 17823010 Kurzbeschreibung: LED converter 500 mA, on/off Leistung: 1 - 22 W Abmessung: 146.5 mm x 43.5 mm x 30 mm
	Artikel-Nr.: 17824010 Kurzbeschreibung: LED converter 500 mA, 1-10V dimmable (analog) Leistung: 5 - 27 W Abmessung: 146.5 mm x 43.5 mm x 30 mm
	Artikel-Nr.: 17826010 Kurzbeschreibung: LED converter 500 mA, DALI dimmable (digital) Leistung: 5 - 27 W Abmessung: 146.5 mm x 44 mm x 30 mm
	Artikel-Nr.: 17829010 Kurzbeschreibung: LED converter 500 mA, trailing-edge phase dimmable Leistung: 1 - 24 W Abmessung: 166 mm x 46 mm x 34 mm

COUPLED LED system recessed spot COUPLED

Artikel-Nr. 12631073

Licht.
Für Generationen.