

RS PRO P2 flat S EM

Emergency light - warm white

EAN 4007841 069728

Article number 069728



LED

36 years (Ø 4,5h / day)



indoor light



high frequency sensor 360°



max. 8 m



2 - 2000 lux



networkable via cable



manual override 4h



IP54



energy saving



plastic free packaging

Function description

Technical specifications

Dimensions (Ø x H)	322 x 68 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	15,1 W
Interconnection	Yes
Interconnection via	Cable
Lichtstrom Gesamtprodukt	1608 lm
Luminous flux, emergency light	38 lm
Gesamtprodukt Effizienz	107 lm/W
Colour temperature	3000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Electronic scalability	Yes


Mechanical scalability	No
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Functions	Emergency light in compliance with EN 60598-2-22 for 3h
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 30 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	Emergency light - warm white
Total harmonic distortion (THD)	16,9
Power factor	0,96
Photobiological safety in accordance with EN 62471	RG1
PU1, EAN	4007841069728

RS PRO P2 flat S EM

Emergency light - warm white
 EAN 4007841 069728
 Article number 069728




Detection Zone

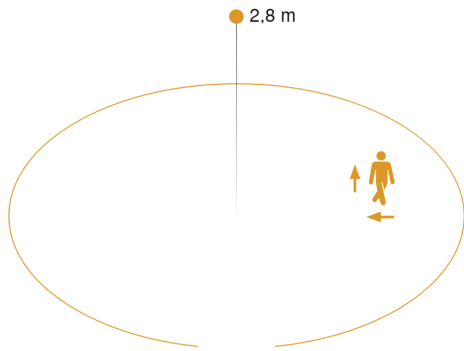


Mögliche Montagehöhe: 2,00 m – 4,00 m
 Orange: radial und tangential

Dimension Drawing

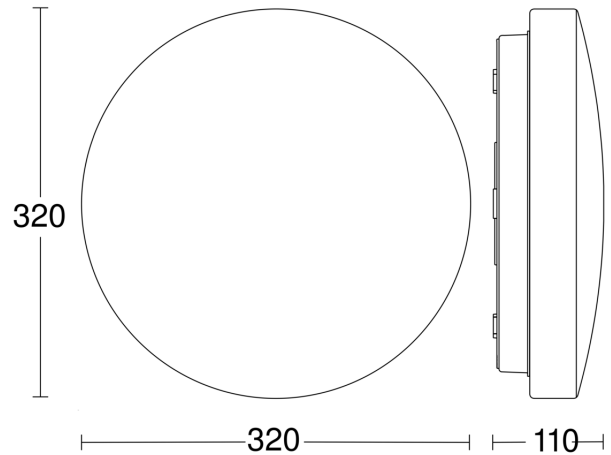


Light Distribution Curve



Output	15,1 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1608 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Sensor-switched LED indoor light - Professional Line

RS PRO P2 flat S EM

Emergency light - warm white
EAN 4007841 069728
Article number 069728



Master/master interconnection circuit diagram

