
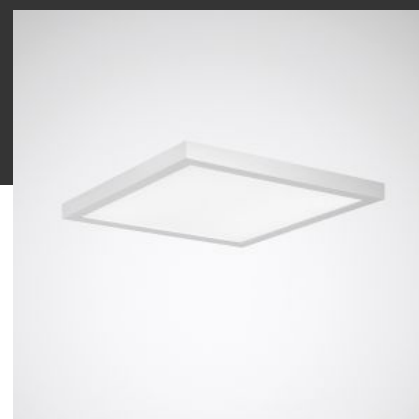



2350 G3 D PW19 3600-8MC ETWD

LED surface-mounted luminaire

TOC: 7938265



Product description

Luminaire type

Surface-mounted LED ceiling luminaire with translucent PMMA cover.

Light management

Suitable for control via smartphone/tablet with LiveLink Basic Wireless app (iOS and Android).

Applications

Offices, Corridors, Foyers, Conference rooms, Retail areas, waiting zones, Education, Care homes.

Mounting methods

For ceiling mounting indoors.

Optical system

Cover of translucent PMMA with photometrically effective prism structure. With symmetric narrow-wide light distribution. Glare evaluation according to UGR rating (EN 12464-1) < 19.

LED system

Luminaire luminous flux 3600 lm, connected load 33,00 W, Power Faktor $\lambda > 0,95$, luminous efficiency of luminaire 109 lm/W. Light colour warm white or neutral white, correlated colour temperature (CCT) variable (3000 K - 4000 K), general colour rendering index (CRI) $R_a > 80$. Colour locus tolerance (initial MacAdam) ≤ 5 SDCM, Mean rated service life $L65(t_{q 25^\circ C}) = 50,000$ h.

Luminaire body

Luminaire body of aluminium. Surface coated white (RAL 9016). Dimensions (L x W): 625 mm x 625 mm, luminaire height 46 mm. Safety class (EN 61140): II, protection rating (DIN EN 60529): IP20, impact resistance level in accordance with IEC 62262: IK02, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. Weight: 2,8 kg.

Electrical version

With electronic control gear unit, wirelessly dimmable via compatible systems (app / push-button). Control gear unit according to DALI-2 standard (EN 62386). Luminaire is switchable and dimmable by means of touch functionality via DALI control terminals (Touch DIM). The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Product features and key data

| | |
|---------------------------------------|--|
| Applications | Offices Banks Foyers Sales rooms Ticket halls Exhibition rooms Educational rooms |
| Luminaire type | Surface-mounted LED ceiling luminaire with translucent PMMA cover. |
| Mounting method | Surface-mounting |
| Luminaire optic | Cover of translucent PMMA with photometrically effective prism structure. |
| Connected load | 33 W |
| Power factor | 0,95 |
| Colour temperature | 4.000 K |
| Rated luminous flux | 3.600 lm |
| Luminous efficacy | 109 lm/W |
| Interchangeability lightsource | No - Electrical safety |
| Service life | L65 (25 °C) = 50.000 h |

Product features and key data

| | |
|--------------------------------|--|
| Colour rendering index | 80 |
| Colour tolerance | 5 SDCM |
| Photobiological class | Group 0 - no risk |
| Luminaire colour | RAL9016 Traffic white |
| Luminaire body | Luminaire body of aluminium. |
| Electrical version | With electronic control gear unit, wirelessly dimmable via compatible systems (app / push-button). |
| DALI-2-Standard EN 62386 | Yes |
| Wire diameter | 1,50 mm ² |
| Connection method | Plug-in terminal |
| Touch-Dim-capable | Yes |
| Dimming range | 3 - 100 % |
| Mains frequency | 50/60 Hz |
| Mains voltage | 220 - 240 V |
| Total harmonic distortion < % | 15,60 % |
| Ingress Protection (IP) rating | IP20 |
| Protection class | II |
| Impact resistance (IK) | IK02 |
| Hot wire resistance | 650 °C |
| Ambient temperature | 25 °C |
| Max. Luminaires B10 | 31 |
| Max. Luminaires B16 | 50 |
| Max. Luminaires C10 | 52 |
| Max. Luminaires C16 | 85 |
| Net length | 625 mm |
| Net width | 625 mm |
| Net height | 46 mm |
| Weight | 2,8 kg |

Available accessories

| Material | Description |
|----------|-------------|
| 7918300 | |
| 7918400 | |