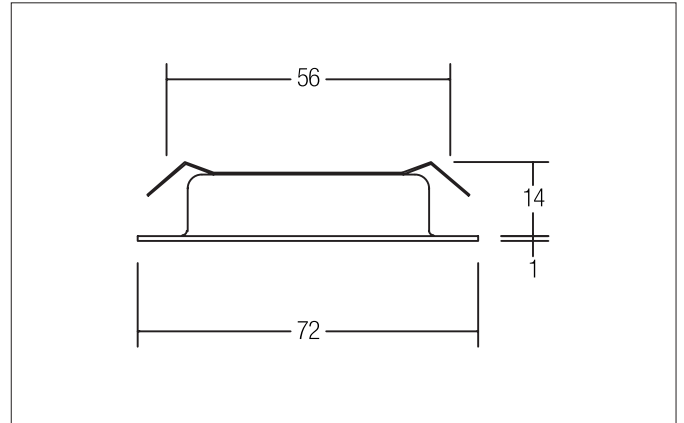
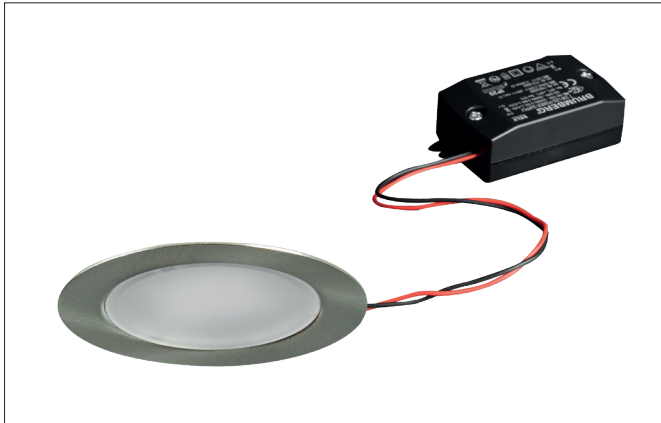


BB17 LED recessed downlight set BB17, on/off
 Artikel-Nr. 38370153

 Licht.
 Für Generationen.

Tender

LED recessed downlight set BB17, on/off, nickel, round. In a compact design, for installation in tool-less rapid assembly systems. Set of lamps optimized for installation in furniture and wood-based materials, including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Steel / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 3W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 260lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 60°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Article data	
Artikel-Nr.	38370153
GTIN	4251433917120
Series name	BB17
Kurzbeschreibung	LED recessed downlight set BB17, on/off
Material	Steel / Plastic
Colour	Nickel
Type of surface	Matt
Shape	round
Outer diameter	72 mm
Built-in diameter	56 mm
Installation depth	14 mm
scope of delivery	Incl. 900 mm connecting cable between the converter and the lamp
weight	0.125 kg

BB17 LED recessed downlight set BB17, on/off
 Artikel-Nr. 38370153

 Licht.
 Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	260 lm
System efficiency	87 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	60 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	3 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Control	on/off
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
Control	on/off

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
stamp	MM
Further references	No cover with thermal insulation material

Packing data	
Gross weight	0.082 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging height	84 mm