

Sensor-switched LED floodlight

# XLED curved S

V2 Anthracite

EAN 4007841 012076

Article number 012076



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m



energy saving

3 years

manufacturer's warranty  
steinel.de/garantie3y

## Function description

Illuminating compact model. Sensor LED floodlight XLED curved S with 9,3 W, compact and discreet lighting solution for building entrances, pathways and co., attractive luminous efficiency (862 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of +-30°.

## Technical specifications

Dimensions (L x W x H)	120 x 160 x 107 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Output	9,3 W
Power consumption	0,5 W
Interconnection	No
Lichtstrom Gesamtprodukt	862 lm
Gesamtprodukt Effizienz	93 lm/W
Colour temperature	3000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	160 °

Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	2 s – 70 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK00
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Installation site	wall
Version	Anthracite
PU1, EAN	4007841012076

Sensor-switched LED floodlight

# XLED curved S


V2 Anthracite

EAN 4007841 012076

Article number 012076



## Detection Zone

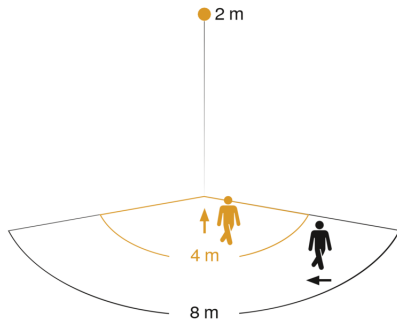


Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

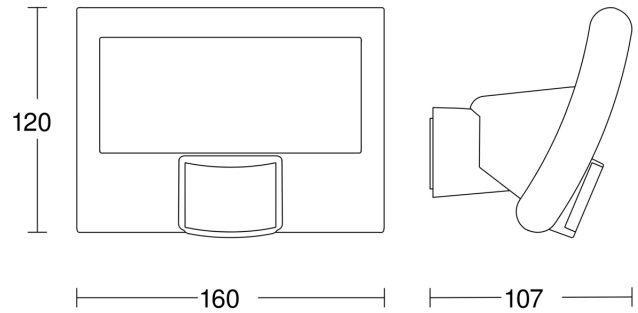

## Schaltplan 1

