

Driver LC 38W 650–1050mA flexC NFC SC EXC3

excite series



With strain-relief

Product description

- _ Can be either used build-in or independent with clip-on strain-relief (see accessory)
- _ For luminaires of protection class I and protection class II
- _ Temperature protection as per EN 61347-2-13 C5e
- _ Adjustable output current between 650 – 1,050 mA via NFC
- _ Max. output power 38 W
- _ Up to 87 % efficiency
- _ Nominal lifetime up to 100,000 h
- _ 5 years guarantee

Housing properties

- _ Casing: polycarbonate, white
- _ Type of protection IP20

Interfaces

- _ Near field communication (NFC)
- _ Terminal blocks: 45° push terminals

Functions

- _ Adjustable output current in 1-mA-steps (NFC)
- _ Constant light output function (CLO)
- _ Protective features (overtemperature, short-circuit, overload, no-load)
- _ Suitable for emergency escape lighting systems acc. to EN 50172

Benefits

- _ Flexible configuration via companionSUITE (NFC)
- _ Application-oriented operating window for maximum compatibility
- _ Best energy savings due to low stand-by losses and high efficiency
- _ In-field programming possible after installation with NFC interface

Typical applications

- _ For downlight, spotlight and decorative applications

Website
<http://www.tridonic.com/87501028>


Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative



High bay

Driver LC 38W 650–1050mA flexC NFC SC EXC3
excite series

The complete data sheet for this product is available in the Downloads section.

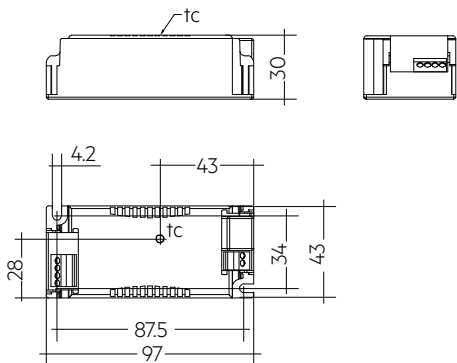

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
LC 38/650-1050/42 flexC NF SC EXC3	87501028	10 pc(s).	230 pc(s).	0.149 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Typ. rated current (at 230 V, 50 Hz, full load) ^①	198 mA
Leakage current (at 230 V, 50 Hz, full load) ^①	< 450 µA
Max. input power	43.6 W
Typ. efficiency (at 230 V, 50 Hz, full load) ^①	87 %
λ (at 230 V, 50 Hz, full load)	0.95
λ (over full operating range)	0.5C – 0.95
In-rush current (peak / duration)	6 A / 60 µs
THD (at 230 V, 50 Hz, full load)	< 10 %
Starting time (AC mode)	< 500 ms
Starting time (DC mode)	< 500 ms
Switchover time (AC/DC) ^②	< 800 ms
Turn off time (at 230 V, 50 Hz, full load)	< 50 ms
Output current tolerance ^{③④}	± 5 %
Max. output current peak (non-repetitive)	≤ output current + 20 %
Output LF current ripple (< 120 Hz)	± 5 %
Output P_ST_LM (at full load)	≤ 1
Output SVM (at full load)	≤ 0.4
Max. output voltage (U-OUT)	60 V
Mains surge capability (between L - N) ^⑤	1 kV
Mains surge capability (between L/N - PE)	2 kV
Burst protection	1 kV
Burst / surge peaks output side against PE	< 3 kV
Ambient temperature t _a	-20 ... +50 °C
Max. casing temperature t _c	87 °C
Type of protection	IP20
Lifetime	up to 100,000 h
Guarantee	5 Year(s)
Dimensions L x W x H	97 x 43 x 30 mm

Approval marks**Standards**

EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61000-4-4, EN 61000-4-5, EN 61347-1, EN 61347-2-13, EN 62384, EN 61547, according to EN 50172, according to EN 60598-2-22

Specific technical data

Type	Output current ^①	Min. output voltage	Max. output voltage	Max. output power	Typ. power consumption (at 230 V, 50 Hz, full load)	Typ. current consumption (at 230 V, 50 Hz, full load)
LC 38/650-1050/42 flexC NF SC EXC3	650 mA	7.5 V	42.0 V	27.3 W	30.5 W	150 mA
LC 38/650-1050/42 flexC NF SC EXC3	750 mA	7.5 V	42.0 V	31.5 W	35.5 W	165 mA
LC 38/650-1050/42 flexC NF SC EXC3	850 mA	7.5 V	42.0 V	35.7 W	40.0 W	185 mA
LC 38/650-1050/42 flexC NF SC EXC3	905 mA	7.5 V	42.0 V	38.0 W	43.0 W	195 mA
LC 38/650-1050/42 flexC NF SC EXC3	950 mA	7.5 V	40.0 V	38.0 W	43.0 W	195 mA
LC 38/650-1050/42 flexC NF SC EXC3	1,050 mA	7.5 V	36.2 V	38.0 W	43.6 W	198 mA

^① Depending on the selected output current.

^② Valid for immediate change of power supply type otherwise the starting time is valid.

^③ Output current is mean value.

^④ Test result at 25 °C.

^⑤ L-N acc. to EN 61000-4-5. 2 Ohm, 1.2/50 µs, 8/20 µs.