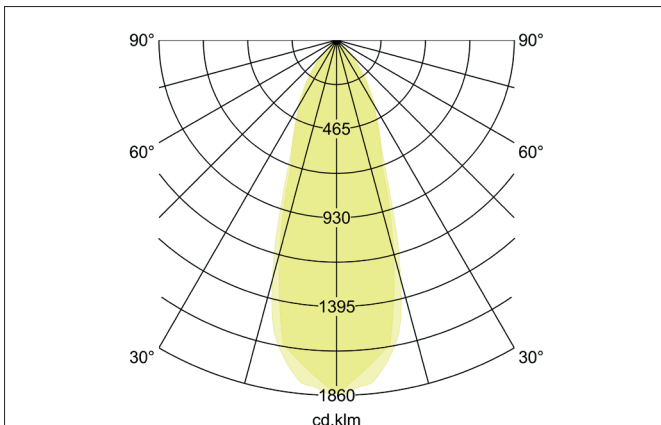
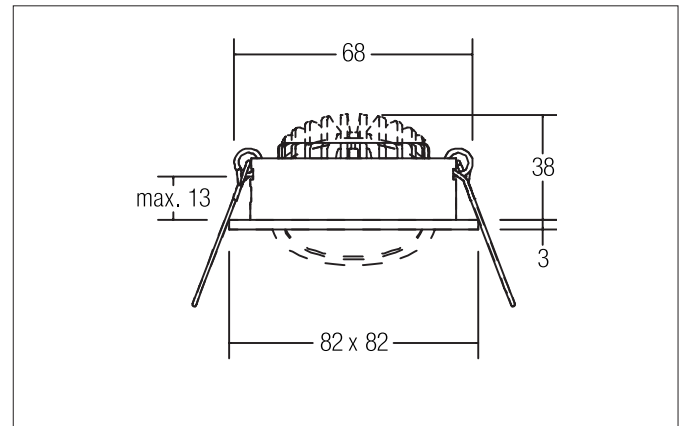


LED recessed spot
 Artikel-Nr. 12262023

 Licht.
 Für Generationen.

Tender

LED recessed spot, chrome, square. In a compact design, for installation in tool-less rapid assembly systems Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 7W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 740lm, Colour temperature: 2.700 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No.

Article data	
Artikel-Nr.	12262023
GTIN	4250047785309
Kurzbeschreibung	LED recessed spot
Material	Aluminium / Glass
Colour	Chrome
Type of surface	Glossy
Shape	square
Built-in diameter	68 mm
Installation depth	38 mm
Length	82 mm
Width	82 mm
weight	0.124 kg

LED recessed spot
Artikel-Nr. 12262023Licht.
Für Generationen.

Lighting technology	
Colour temperature	2700 K
Light colour	White
Light output	Direct
Luminous flux	740 lm
System efficiency	106 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	7 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Rated life time L70/B50 at 25 °C	50000 h

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	30°
stamp	MM
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent

Packing data	
Gross weight	0.143 kg
Length of packaging	100 mm
Packaging width	43 mm
Packaging height	100 mm