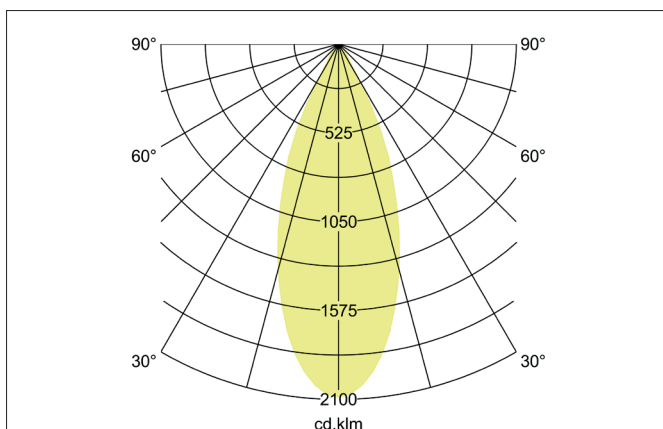
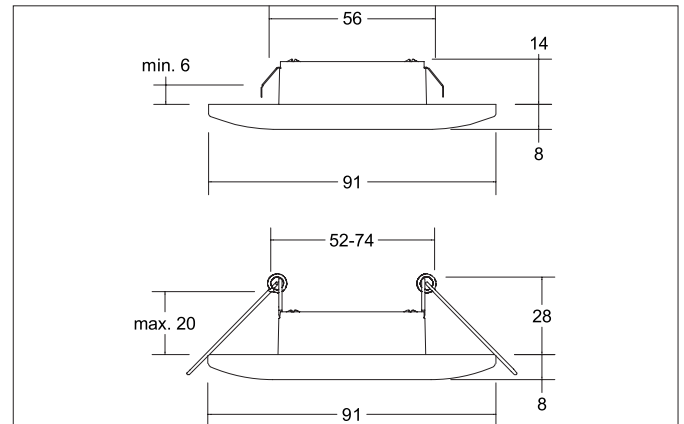
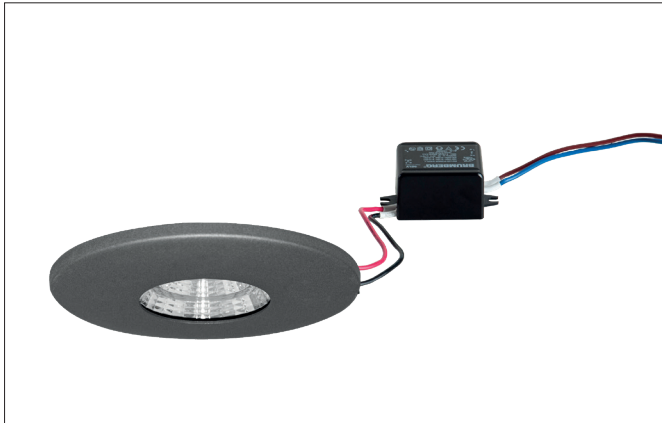


ADAPT LED recessed downlight ADAPT, on/off

Artikel-Nr. 38371643

Licht.
Für Generationen.**Tender**

LED recessed downlight ADAPT, on/off, titanium, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 52 x W 30 x H 23 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 3W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 440lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 34°, With control gear: Yes, Control: on/off.

Article data	
Artikel-Nr.	38371643
GTIN	4251433930112
Series name	ADAPT
Kurzbeschreibung	LED recessed downlight ADAPT, on/off
Material	Aluminium / Steel / Plastic
Colour	Titanium
Type of surface	Matt
Shape	round
Outer diameter	91 mm
Built-in diameter	56 mm
Installation depth	14 mm
Aufbauhöhe	8 mm
scope of delivery	Incl. built-in leaf springs for 56 mm cut-out with installation depth of 14 mm and built-in leg springs for 52 - 74 mm cut-out (enclosed for quick exchange) with installation depth of 28 mm.
weight	0.173 kg

ADAPT LED recessed downlight ADAPT, on/off

Artikel-Nr. 38371643

Licht.
Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	440 lm
System efficiency	147 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	34 °
Light sharing	Symmetric

Operating technology of the luminaires	
System output	3 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Control	on/off
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Protection class	II
Degree of protection	IP20
Control	on/off

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
stamp	MM
Further references	No cover with thermal insulation material

Packing data	
Gross weight	0.204 kg
Length of packaging	105 mm
Packaging width	90 mm
Packaging height	55 mm