

Presence detector - Professional Line

# True Presence

V3.0 KNX - in-ceiling installation, white

EAN 4007841 079451

Article number 079451



high frequency  
sensor 360°



Movement Ø 15 m



Presence Ø 15 m



True Presence Ø 9  
m



brightness



air humidity



temperature



KNX



2 - 12 m



2 - 2000 lux

## Function description

The world's first true presence detector! No unnecessary stay-ON times any more – no unnecessary electricity costs. Precision high-frequency measurement of the surrounding area provides 100 per-cent reliable detection. The True Presence detector reliably identifies whether persons are present or absent over an area of 64 m<sup>2</sup> – on the basis of the body's micro movements as well as human vital functions, such as breathing in and out, or shoulder movement. The new standard in building automation.

# True Presence

V3.0 KNX - in-ceiling installation, white  
 EAN 4007841 079451  
 Article number 079451



## Technical specifications


Type	Presence detector
Dimensions (L x W x H)	89 x 103 x 103 mm
Power supply, detail	KNX bus
Sensor Technology	High frequency
Application, place	Indoors
Installation site	ceiling
Installation	In-ceiling installation
Mounting height	2,00 – 12,00 m
Reach, radial	Ø 15 m (177 m <sup>2</sup> )
Reach, tangential	Ø 15 m (177 m <sup>2</sup> )
Reach, presence	Ø 15 m (177 m <sup>2</sup> )
True Presence reach	Ø 9 m (64 m <sup>2</sup> )
HF-system	7,2 GHz
Detection angle	360 °
Angle of aperture	160 °
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Detection	also through glass, wood and stud walls

Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Time setting	30 s – 1092 Min.
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Humidity output, Presence output, Day / night function, Dewpoint, Temperature output, Logic gate
With bus coupling	Yes
Settings via	ETS software, Bluetooth, Bus
With remote control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Application, room	classroom, lecture hall, one-person office, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, hotel room, care room, duty room, recreation room, dining hall / staff restaurant, changing room, kitchenette, sports hall, reception / lobby, WC / washroom, warehouse, Indoors
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	KNX - in-ceiling installation, white
PU1, EAN	4007841079451
Technology, sensors	High frequency, Light sensor, Temperature, Air humidity

# True Presence


V3.0 KNX - in-ceiling installation, white  
EAN 4007841 079451  
Article number 079451

## Detection Zone 1

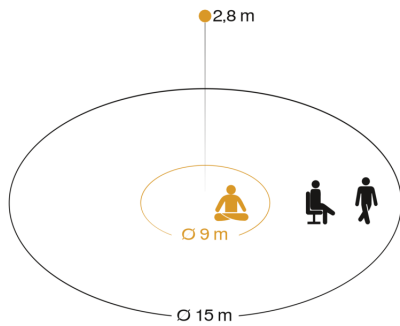


Mögliche Montagehöhe: 2,00 m – 12,00 m  
Orange: True Presence  
Schwarz: Bewegung und Präsenz

## Detection Zone 2

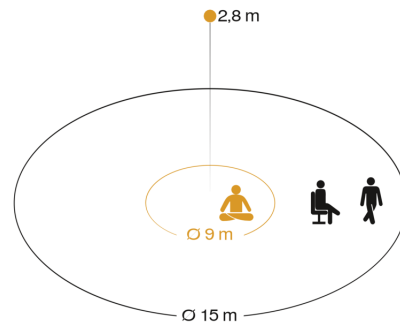

Mögliche Montagehöhe: 2,00 m – 12,00 m  
Orange: True Presence  
Schwarz: Bewegung und Präsenz

## Dimension Drawing 1

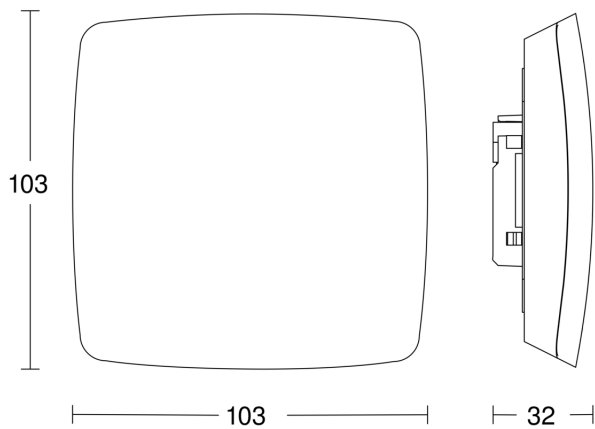

## Dimension Drawing 2

